


Tubes for Motorcycle Tires

The new generation of Motorcycle Butyl Tubes (synthetic rubber).

Thinner and lighter with a more permanent airseal:
Better performance with optimized weight.

**Integrated Valve Core
Remover in Cap**




Rim Ø	Description	Fitting tire size	Article No.
16"	3.00/3.25 - 16 TR4 M/C	3.00 - 16 3.25 - 16 90/90 - 16 100/80 - 16	02 80 038
16"	3.25/3.50 - 16 TR4 M/C	3.25 - 16 3.50 - 16 120/80 - 16 110/90 - 16 100/90 - 16 90/100 - 16	02 80 039
16"	4.00/4.60 - 16 TR4 M/C	4.00 - 16 4.60 - 16 120/90 - 16 140/80 - 16	02 80 081
16"	5.00/5.10 - 16 TR4 M/C	5.00 - 16 5.10 - 16 130/90 - 16 140/90 - 16 150/80 - 16 180/65 - 16	02 80 082
17"	3.00/3.25 - 17 TR4 M/C	3.00 - 17 3.25 - 17 100/80 - 17	02 80 083
17"	3.25/3.50 - 17 TR4 M/C	3.25 - 17 3.50 - 17 110/80 - 17 110/90 - 17 120/80 - 17 130/70 - 17 4.00 - 17 4.50 - 17 110/90 - 17 130/70 - 17 170/70 - 17	02 80 084
17"	4.00/4.50 - 17 TR4 M/C	4.25 - 17 4.60 - 17 120/90 - 17 130/80 - 17	02 80 085
18"	2.25/2.50 - 18 TR4 M/C	2.25 - 18 2.50 - 18	02 80 086
18"	2.50/2.75 - 18 TR4 M/C	2.50 - 18 2.75 - 18 80/90 - 18	02 80 087
18"	3.00/3.25 - 18 TR4 M/C	3.00 - 18 3.25 - 18 90/90 - 18	02 80 088
18"	3.50/4.00 - 18 TR4 M/C	3.50 - 18 4.10 - 18 100/90 - 18 110/80 - 18 120/80 - 18 4.00 - 18 4.25 - 18 100/100 - 18 110/90 - 18 130/70 - 18 4.00 - 18 4.70 - 18 4.60 - 18 110/90 - 18 120/80 - 18 120/90 - 18 150/70 - 18	02 80 089
18"	4.00/4.50 - 18 TR4 M/C	4.25 - 18 4.50 - 18 110/100 - 18 130/70 - 18 130/80 - 18	02 80 090
19"	3.25/3.50 - 19 TR4 M/C	3.25 - 19 3.60 - 19 90/90 - 19 110/80 - 19 3.50 - 19 4.10 - 19 100/90 - 19	02 80 091
19"	3.50/4.00 - 19 TR4 M/C	3.50 - 19 4.10 - 19 4.60 - 19 100/90 - 19 110/90 - 19 4.00 - 19 4.25 - 19 110/80 - 19 120/80 - 19	02 80 092
21"	2.50/2.75 - 21 TR4 M/C	2.50 - 21 2.75 - 21 70/100 - 21 80/80 - 21 80/90 - 21 90/80 - 21 2.75 - 21 80/90 - 21 90/80 - 21 100/80 - 21	02 80 093
21"	2.75/3.00 - 21 TR4 M/C	3.00 - 21 80/100 - 21 90/90 - 21	02 80 094

Continental Reifen Deutschland GmbH
Business Unit Motorcycle Tires
Continentalstraße 3 - 5
34497 Korbach
Germany

Postbox 11 20
34481 Korbach
Germany

Phone: +49.511 9 38 - 01
Fax: +49.5631 58 - 22 40
E-Mail: service.motorrad@conti.de
Internet: www.conti-moto.com

Your local dealer.




Further information can be obtained from
www.conti-moto.com

Continental 
The Future in Motion

10/2018 (EN)

Continental 
The Future in Motion

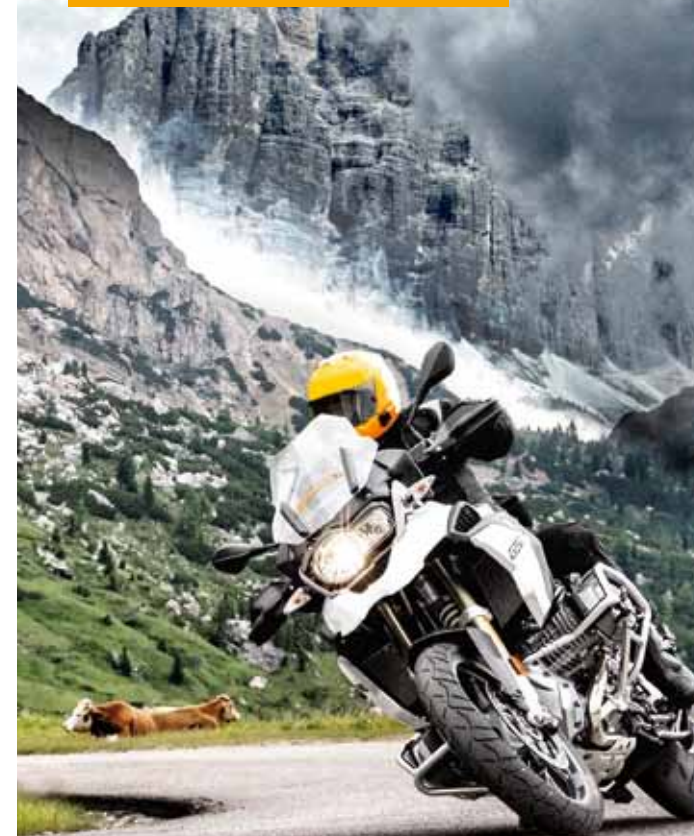

News 2019


ContiTrailAttack 3
ContiScoot
Tubes

Continental Motorcycle Tires

ContiTrailAttack 3

The most agile On- / Off Road Tire, 100% trust from start for modern and powerful Adventure Tourers.

- › 100% TRUST: Shortest warm-up time - optimal temperature reached within the first 1500 meters.*
- › BENCHMARK IN WEAR: after 3500 km there was more tread depth than the benchmark competitor tire and still had better handling abilities.**
- › PERFORMANCE OVER LIFETIME: Built to ensure highest constant level of performance even after thousands of kilometers due to a mix of MultiGrip, carcass construction and pattern design.
- › WET GRIP: Best wet grip achieved by compound & pattern design.
- › AGILITY: Most agile All-rounder for easy, accurate and predictable handling.
- › COMFORT & STABILITY: high level of comfort, absorption and stability even on challenging road conditions.

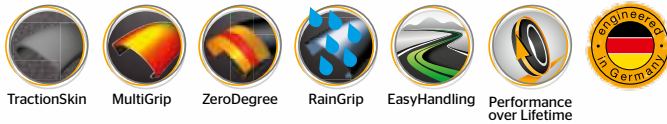

Rim Ø	Size	LI/SI	TL/TT	Article No.	Remarks
Front wheel					
17"	120/70 ZR 17 M/C	(58 W)	TL	02 44 537	
	100/90 - 19 M/C	57 H	TL	02 00 131	
	110/80 R 19 M/C	59 V	TL	02 44 531	
19"	120/70 R 19 M/C	60 V	TL	02 44 532	
	120/70 ZR 19 M/C	60 W	TL	02 44 535	
	90/90 - 21 M/C	54 S	TT	02 00 132	
21"	90/90 - 21 M/C	54 H	TL	02 40 330	
	90/90 V 21 M/C	(54 V)	TL	02 40 324	
	Rear wheel				
17"	120/90 - 17 M/C	64 S	TL	02 40 325	
	130/80 - 17 M/C	65 S	TT	02 00 133	
	130/80 - 17 M/C	65 H	TL	02 40 326	
	130/80 R 17 M/C	65 H	TL	02 44 538	
	140/80 R 17 M/C	69 V	TL	02 44 539	
	150/70 R 17 M/C	69 V	TL	02 44 533	
	160/60 ZR 17 M/C	(69 W)	TL	02 44 540	
	170/60 R 17 M/C	72 V	TL	02 44 534	
	170/60 ZR 17 M/C	72 W	TL	02 44 536	
	180/55 ZR 17 M/C	(73 W)	TL	02 44 541	
	190/55 ZR 17 M/C	(75 W)	TL	02 44 542	
	18"	140/80 - 18 M/C	70 S	TT	02 00 134
150/70 R 18 M/C		70 V	TL	02 44 663	

* Internal outdoor wear test under realistic touring conditions on BMW 1200 GS (K50)

** Internal outdoor wear test under realistic touring conditions on BMW 1200 GS (K25)

ContiScoot

Premium Scooter Tire with test winner genes.

- › PERFORMANCE WET GRIP: Best wet grip in the scooter tire segment - using the pattern design of our test winner ContiRoadAttack 3 with excellent drainage and a wet-optimized compound.
- › BEST COLD GRIP: Trust from the first meters.
- › SAFETY: Short braking distance with maximum grip and safety on dry and wet surfaces.
- › AGILITY: Agile scooter tire for easy handling in city traffic.
- › COMFORT: Highest comfort also on uneven surfaces like cobblestones.
- › MILEAGE: High mileage with uniform wear which provides a high performance over the lifetime of the tire.



Rim Ø	Size	LI/SI	TL/TT	Article No.	Remarks
Front wheel					
12"	110/70 - 12 M/C	47 P	TL	02 10 010	
	120/70 - 12 M/C	51 P	TL	02 20 063	
	110/70 - 13 M/C	48 S	TL	02 20 075	
13"	110/90 - 13 M/C	56 P	TL	02 20 074	
	120/70 - 13 M/C	53 P	TL	02 20 087	
	80/90 - 14 M/C	46 P	TL	02 20 078	
14"	90/90 - 14 M/C	46 P	TL	02 20 072	
	120/70 - 14 M/C	55 P	TL	02 20 082	
	120/80 - 14 M/C	58 S	TL	02 20 065	
15"	120/70 - 15 M/C	56 S	TL	02 20 089	
	90/80 - 16 M/C	51 S	TL	02 20 090	Reinforced
	100/80 - 16 M/C	50 P	TL	02 20 085	
16"	110/70 - 16 M/C	52 S	TL	02 20 067	
	120/70 - 16 M/C	57 P	TL	02 20 080	
Rear wheel					
12"	120/70 - 12 M/C	58 P	TL	02 20 071	Reinforced
	130/70 - 12 M/C	62 P	TL	02 20 064	Reinforced
	130/70 - 13 M/C	63 P	TL	02 20 076	Reinforced
13"	140/60 - 13 M/C	63 P	TL	02 20 083	Reinforced
	150/70 - 13 M/C	64 S	TL	02 20 066	
	90/90 - 14 M/C	52 P	TL	02 20 079	Reinforced
14"	100/80 - 14 M/C	59 S	TL	02 20 091	Reinforced
	100/90 - 14 M/C	57 P	TL	02 20 073	Reinforced
	140/70 - 14 M/C	68 S	TL	02 20 070	Reinforced
15"	140/70 - 15 M/C	69 P	TL	02 20 081	Reinforced
	120/80 - 16 M/C	60 P	TL	02 20 086	
	130/70 - 16 M/C	61 S	TL	02 20 069	

