

LSR1 17.5" Regional All-Position

Applications: Regional and urban all-position use.

Legend:

3G Casing	SmartWay® Verified	Intelligent Tire	Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

LSR1

17.5" Regional All-Position

GOODS PEOPLE CONSTRUCTION



PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	SINGLE	DUAL
					LBS, PSI (KG, KPa)		LBS, PSI (KG, KPa)														
10R17.5	H	04121950000	17	75	15.7	398	33.8	858	10.0	254	10.3	262	7.50, 6.75	11.3	286	613	381	70	32	4675, 115 (2120, 790)	4410, 115 (2000, 790)


TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits



Multi-rib tread design features excellent wet traction, lateral stability and reduced noise.

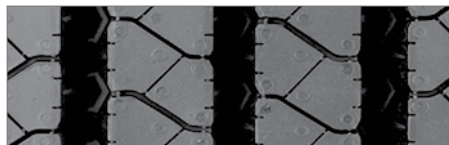

Patented innovative groove technology leads to minimum stone retention, extending casing life.



Advanced tread compound provides long original mileage in regional applications.

Applications: Regional and urban all-position use.