Continental
The Future in Motion

Welcome to our newest interactive and digitally optimized tire range!

DIGITAL USE OPTIMIZED

Skip instructions →

Tap or click here for more →




Continental
The Future in Motion

On the CONTENT page, simply click on the desired product segment to view the entire portfolio and deep dive into product details.

One step back →

Tap or click again →

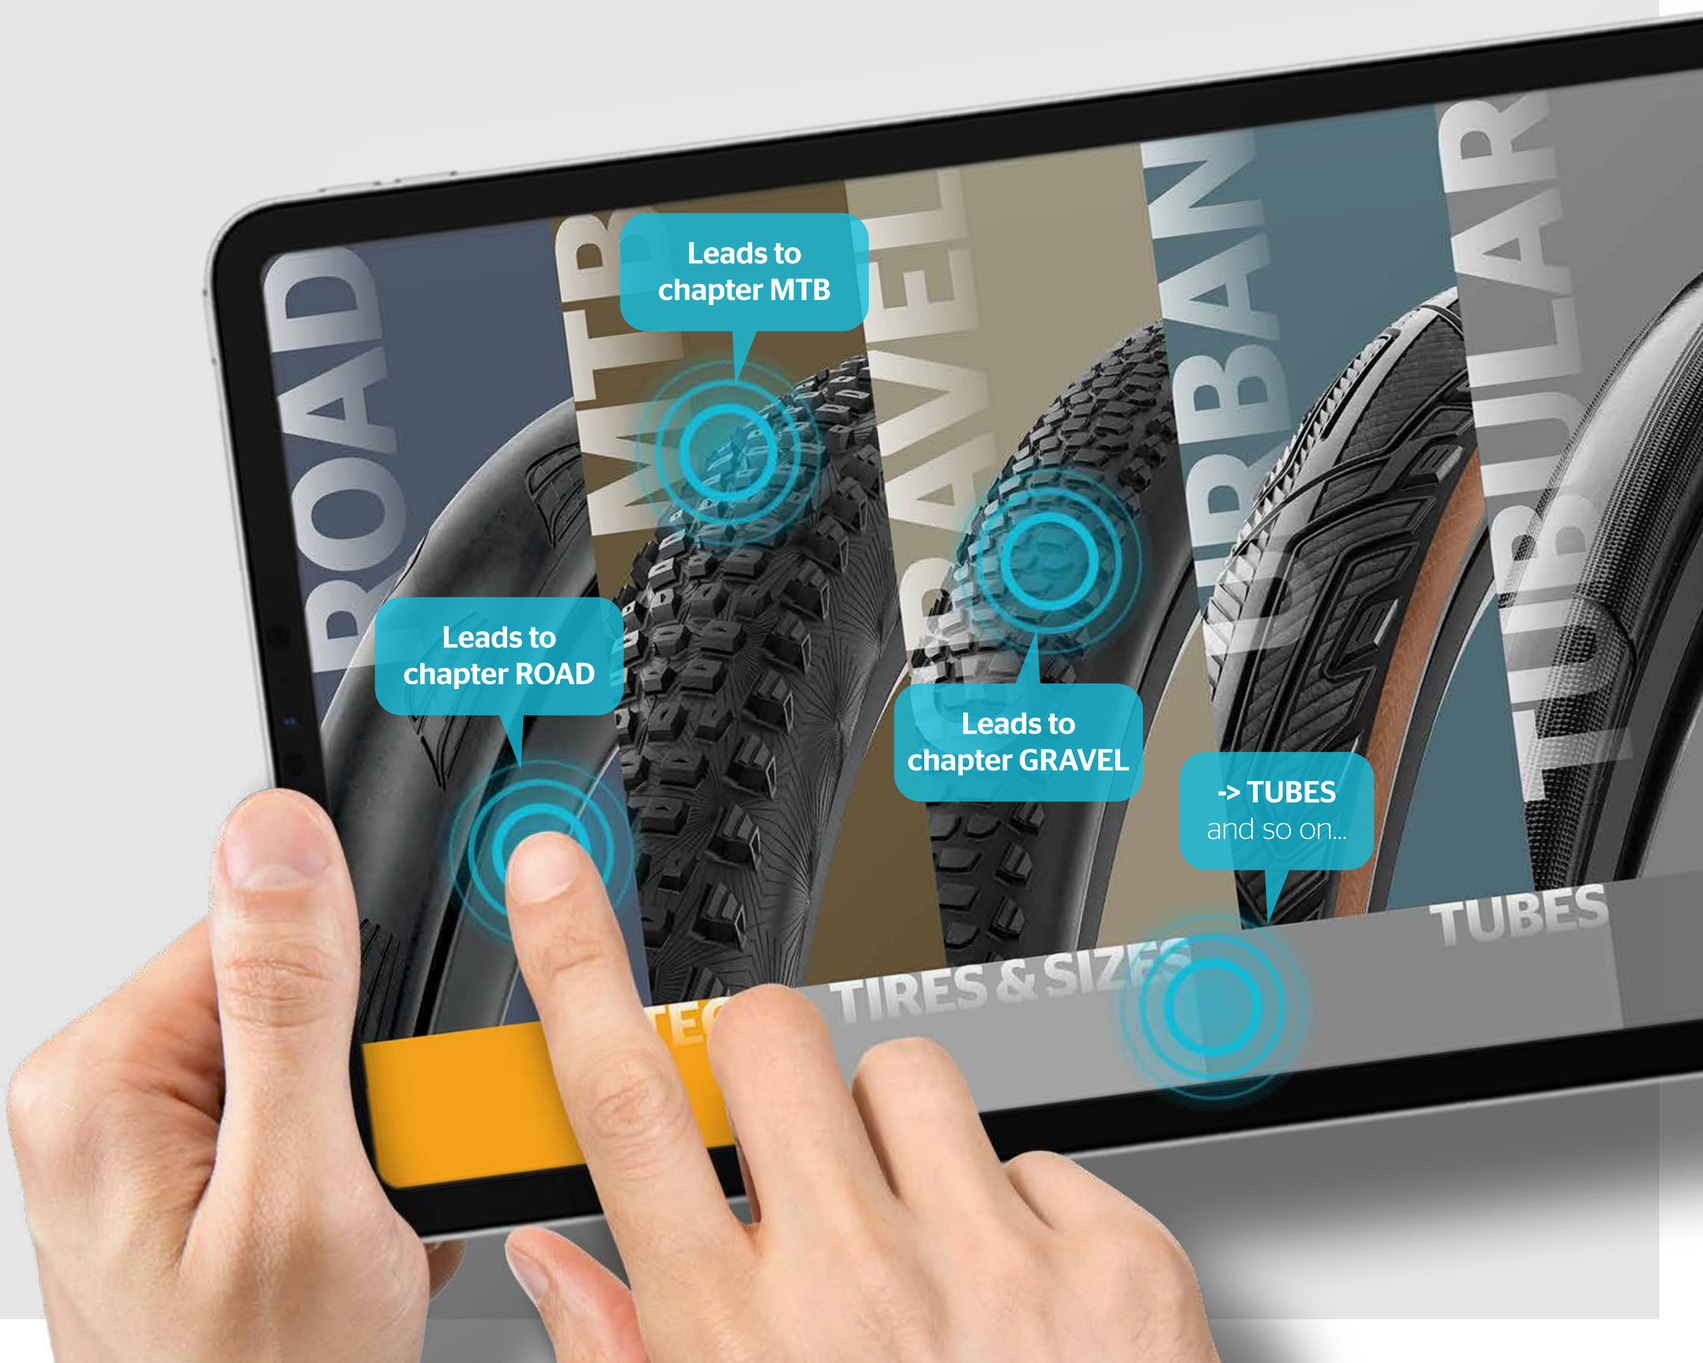

Continental
The Future in Motion

For example, in the ROAD chapter you can go directly to each individual tire, to our website or directly back to CONTENT.

One step back →

One last tap or click →



Continental
The Future in Motion

And each product overview, click on the left icons to expand for further product details.

That's all you need to know. So feel free to have a look around and have fun!

Tap or click to start



Continental
The Future in Motion

BICYCLE Tire Range

2026/27





TECH TIRES & SIZES TUBES SUPPORT

Grand Prix TR
Grand Prix
AERO 111
Grand Prix 5000 AS TR
Grand Prix 5000 S TR
Grand Prix 5000 TT TR
Grand Prix 5000
Grand Prix 4-Season
Ultra Sport III
Gator Hardshell
Gatorskin
Grand Sport Race
Hometrainer II



ROAD

Grand Prix TR

TECHNOLOGY

SIZES

FEATURES



TECHNOLOGY

SIZES

FEATURES

FOR EVERY RIDE

The perfect option for those looking for a great value tire that is tubeless-ready. It comes with BlackChili Compound and has an all-new 4-ply construction, that perfectly balances puncture protection and rolling resistance. Whether training, commuting or going the distance – the Grand Prix TR has you covered.

BLACK CHILI COMPOUND

With our unique tread compound, we have revolutionized the sport of cycling. With the legendary **BlackChili Compound** we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.

TR

All **Tubeless Ready** tires have been designed with versatility in mind. It's your choice: set up tubeless using Sealant or use an innertube.

The robust **4-ply construction** balances rolling resistance, low weight and puncture resistance.

TECHNOLOGY

SIZES

FEATURES

Grand Prix TR

BlackChili Compound - 4/240 TPI TR

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0150728	25-622	28“ | 700 x 25C	foldable	305	52 – 108	4 019238 097955	64,95
0150729	25-622	28“ | 700 x 25C	foldable	305	52 – 108	4 019238 097931	64,95
0150731	28-622	28“ | 700 x 28C	foldable	340	52 – 94	4 019238 098068	64,95
0150732	28-622	28“ | 700 x 28C	foldable	355	52 – 94	4 019238 098082	64,95
0150733	30-622	28“ | 700 x 30C	foldable	370	43 – 72	4 019238 098105	64,95
0150734	30-622	28“ | 700 x 30C	foldable	385	43 – 72	4 019238 098129	64,95
0150735	32-622	28“ | 700 x 32C	foldable	385	43 – 72	4 019238 098143	64,95
0150736	32-622	28“ | 700 x 32C	foldable	395	43 – 72	4 019238 098167	64,95

*min. – max.

BLACK CHILI COMPOUND

TR

Selected sizes also available as tube-type tire.

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.

Grand Prix TR

TECHNOLOGY

SIZES

FEATURES

Tread pattern inspired by iconic Lazer Grip

BlackChili Compound



Puncture resistant with new 4-ply construction

Tubeless Ready & Hookless Compatible

Grand Prix

TECHNOLOGY

SIZES



FOR EVERY RIDE

The Grand Prix inherits technology and learnings from the iconic Grand Prix 5000 range. It comes with BlackChili Compound and has a 3-ply construction, that offers good puncture protection and rolling resistance. Whether training, commuting or going the distance – the Grand Prix has you covered.

TECHNOLOGY

SIZES

BLACK CHILI COMPOUND

With our unique tread compound, we have revolutionized the sport of cycling. With the legendary **BlackChili Compound** we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.

TECHNOLOGY

SIZES

Grand Prix

BlackChili Compound - 3/180 TPI - Tube

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0150837	28-622	28“ | 700 x 28C	● foldable	290	52 – 94	4 019238 326970	48,95
0150838	28-622	28“ | 700 x 28C	◐ foldable	300	52 – 94	4 019238 326963	48,95
0150839	30-622	28“ | 700 x 30C	● foldable	315	43 – 72	4 019238 326956	48,95
0150840	30-622	28“ | 700 x 30C	◐ foldable	320	43 – 72	4 019238 326949	48,95
NEW 0150848	32-622	28“ | 700 x 32C	● foldable	340	43 – 94	4 019238 476279	48,95

*min. – max.

BLACK CHILI COMPOUND

AERO 111

TECHNOLOGY

SIZES

FEATURES



A PERFECTED STORM

Extensively tested in the wind tunnel, the AERO 111 represents the ultimate aerodynamic tire without compromise. To save every watt we created the unique tread pattern together with the experts at Swiss Side.

BlackChili compound is renowned for its perfect balance of grip and low rolling resistance. For AERO 111 we use a race-optimized BlackChili, offering low rolling resistance in combination with excellent grip in wet and dry conditions.

Vectran, our patented technology from the GP5000 family. Selected for AERO 111 because of its unparalleled level of protection from sharp foreign objects, whilst not affecting rolling resistance.

Swiss Side are the industry leader in aerodynamics. With over 20 years of experience in both Formula 1 and cycling, they are renowned for utilising the latest technologies and methodologies in computational aerodynamics and real-world testing.

The combination of all these features means on top of the low aerodynamic drag, the AERO 111 offers low rolling resistance, good puncture resistance and exceptional grip in both wet and dry conditions.

AERO 111

BlackChili Compound - Vectran Breaker - ACT - 2/220 TPI TR

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0102046	26-622	28“ | 700 x 26C	● foldable	245	52 – 101	4 019238 283921	128,95
0102047	29-622	28“ | 700 x 29C	● foldable	270	52 – 101	4 019238 283907	128,95
NEW 0102103	32-622	28“ | 700 x 32C	● foldable	310	43 – 94	4 019238 326635	128,95

*min. – max.

BLACK CHILI COMPOUND · Vectran™ BREAKER · ACTIVE COMFORT TECHNOLOGY · AERODYNAMICS BY SWISS SIDE · TR

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.



AERO 111

TECHNOLOGY

SIZES

FEATURES

DT SWISS

The aero-optimized tread pattern certainly looks different: 48 little cavities are regularly distributed over its surface. These so-called **'vortex generators'** are the very feature that manage to control the turbulence in the airflow on the surface of the front wheel. Ultimately, this results in a perfected storm that allows for the reduction of drag of the entire wheel tire system.



TR

All **Tubeless Ready** tires have been designed with versatility in mind. It's your choice: set up tubeless using Conti RevoSealant or use an innertube.

AERO 111


TECHNOLOGY

SIZES

FEATURES

Without AERO 111


The rider benefits less from the sailing effect because the early airflow separation increases the turbulent air flow. Thus, increasing aerodynamic drag of the wheel-tire system.

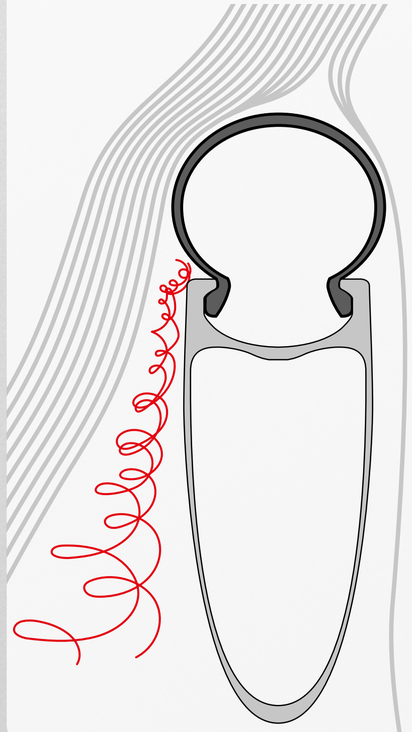



With AERO 111

The sailing effect (forward acting force) increases. Even with lower rim profiles the rider benefits from this effect because the laminar airflow stays adjacent to the rim for a longer time. Thus, decreasing aerodynamic drag of the wheel-tire system at all speeds.

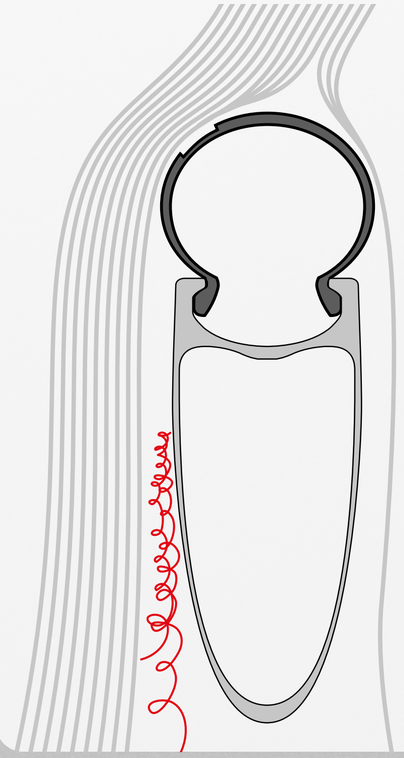


AERO 111

TECHNOLOGY

SIZES

FEATURES

45 KM/H - DRAG PERFORMANCE

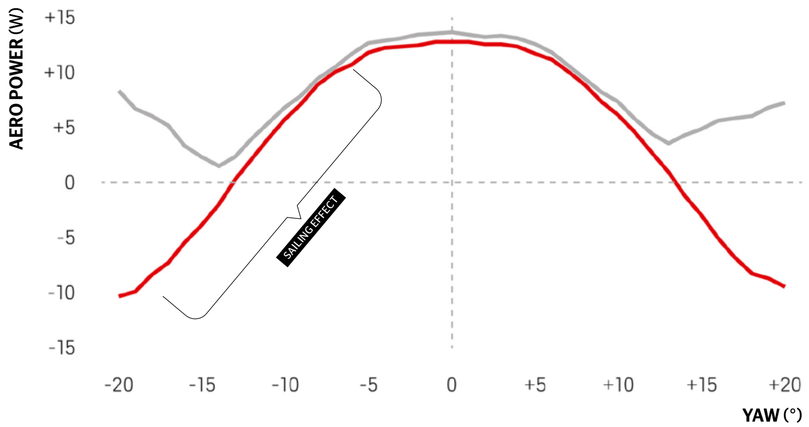


DT Swiss ARC 1100 DICUT® DB 62
Continental **AERO 111** 26 mm, 45 km/h

DT Swiss ARC 1100 DICUT® DB 62
Continental GP 5000 S TR 25 mm, 45 km/h

Power needed to overcome the aerodynamic drag

Negative aerodynamic drag resulting in forward propulsion

30 KM/H - DRAG PERFORMANCE

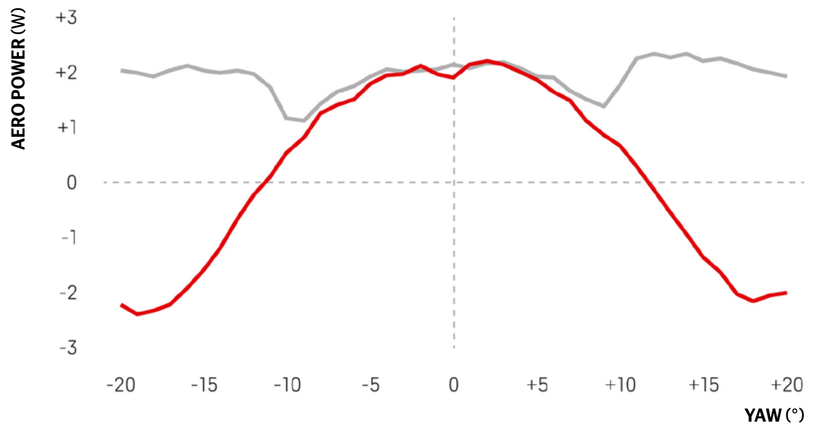

DT Swiss ARC 1100 DICUT® DB 62
Continental **AERO 111** 26 mm, 30 km/h

DT Swiss ARC 1100 DICUT® DB 62
Continental GP 5000 S TR 25 mm, 30 km/h

Grand Prix 5000 AS TR

TECHNOLOGY

SIZES

FEATURES



TECHNOLOGY

SIZES

FEATURES

FOR THE EXTRA MILE

The strongest Grand Prix 5000: creates trust in all weather conditions and boosts your protection.

BLACK CHILI COMPOUND

With our unique tread compound, we have revolutionized the sport of cycling. With the legendary **BlackChili Compound** we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.

ACTIVE COMFORT TECHNOLOGY

The revolutionary approach in cycling. Embedded in the tire construction the **Active Comfort Technology** absorbs vibrations and smoothens your ride.

Vectran™ BREAKER

Vectran is spun from liquid crystal-polymer. This way a thermoplastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker. Without effecting rolling resistance.

LAZER GRIP

Lazer Grip, to make you one with the road. The lazered micro profile structure expands over the tire's shoulder and provides outstanding cornering.

Grand Prix 5000 AS TR

BlackChili Compound - Vectran Breaker - LazerGrip - ACT - 2/220 TPI TR

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0101910	25-622	700 x 25C	foldable refl.	285	52 – 108	4 019238 056754	113,95
0101901	25-622	700 x 25C	foldable	295	52 – 108	4 019238 056716	107,95
0101911	28-622	700 x 28C	foldable refl.	315	52 – 94	4 019238 056815	113,95
0101902	28-622	700 x 28C	foldable	330	52 – 94	4 019238 056792	107,95
0101912	32-622	700 x 32C	foldable refl.	370	43 – 72	4 019238 056914	113,95
0101903	32-622	700 x 32C	foldable	380	43 – 72	4 019238 056884	108,95
0101913	35-622	700 x 35C	foldable refl.	415	37 – 65	4 019238 056990	113,95
0101904	35-622	700 x 35C	foldable	425	37 – 65	4 019238 056952	108,95

*min. – max.

BLACK CHILI COMPOUND · Vectran™ BREAKER · ACTIVE COMFORT TECHNOLOGY · LAZER GRIP · TR

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.


This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.

Grand Prix 5000 AS TR

TECHNOLOGY

SIZES

FEATURES

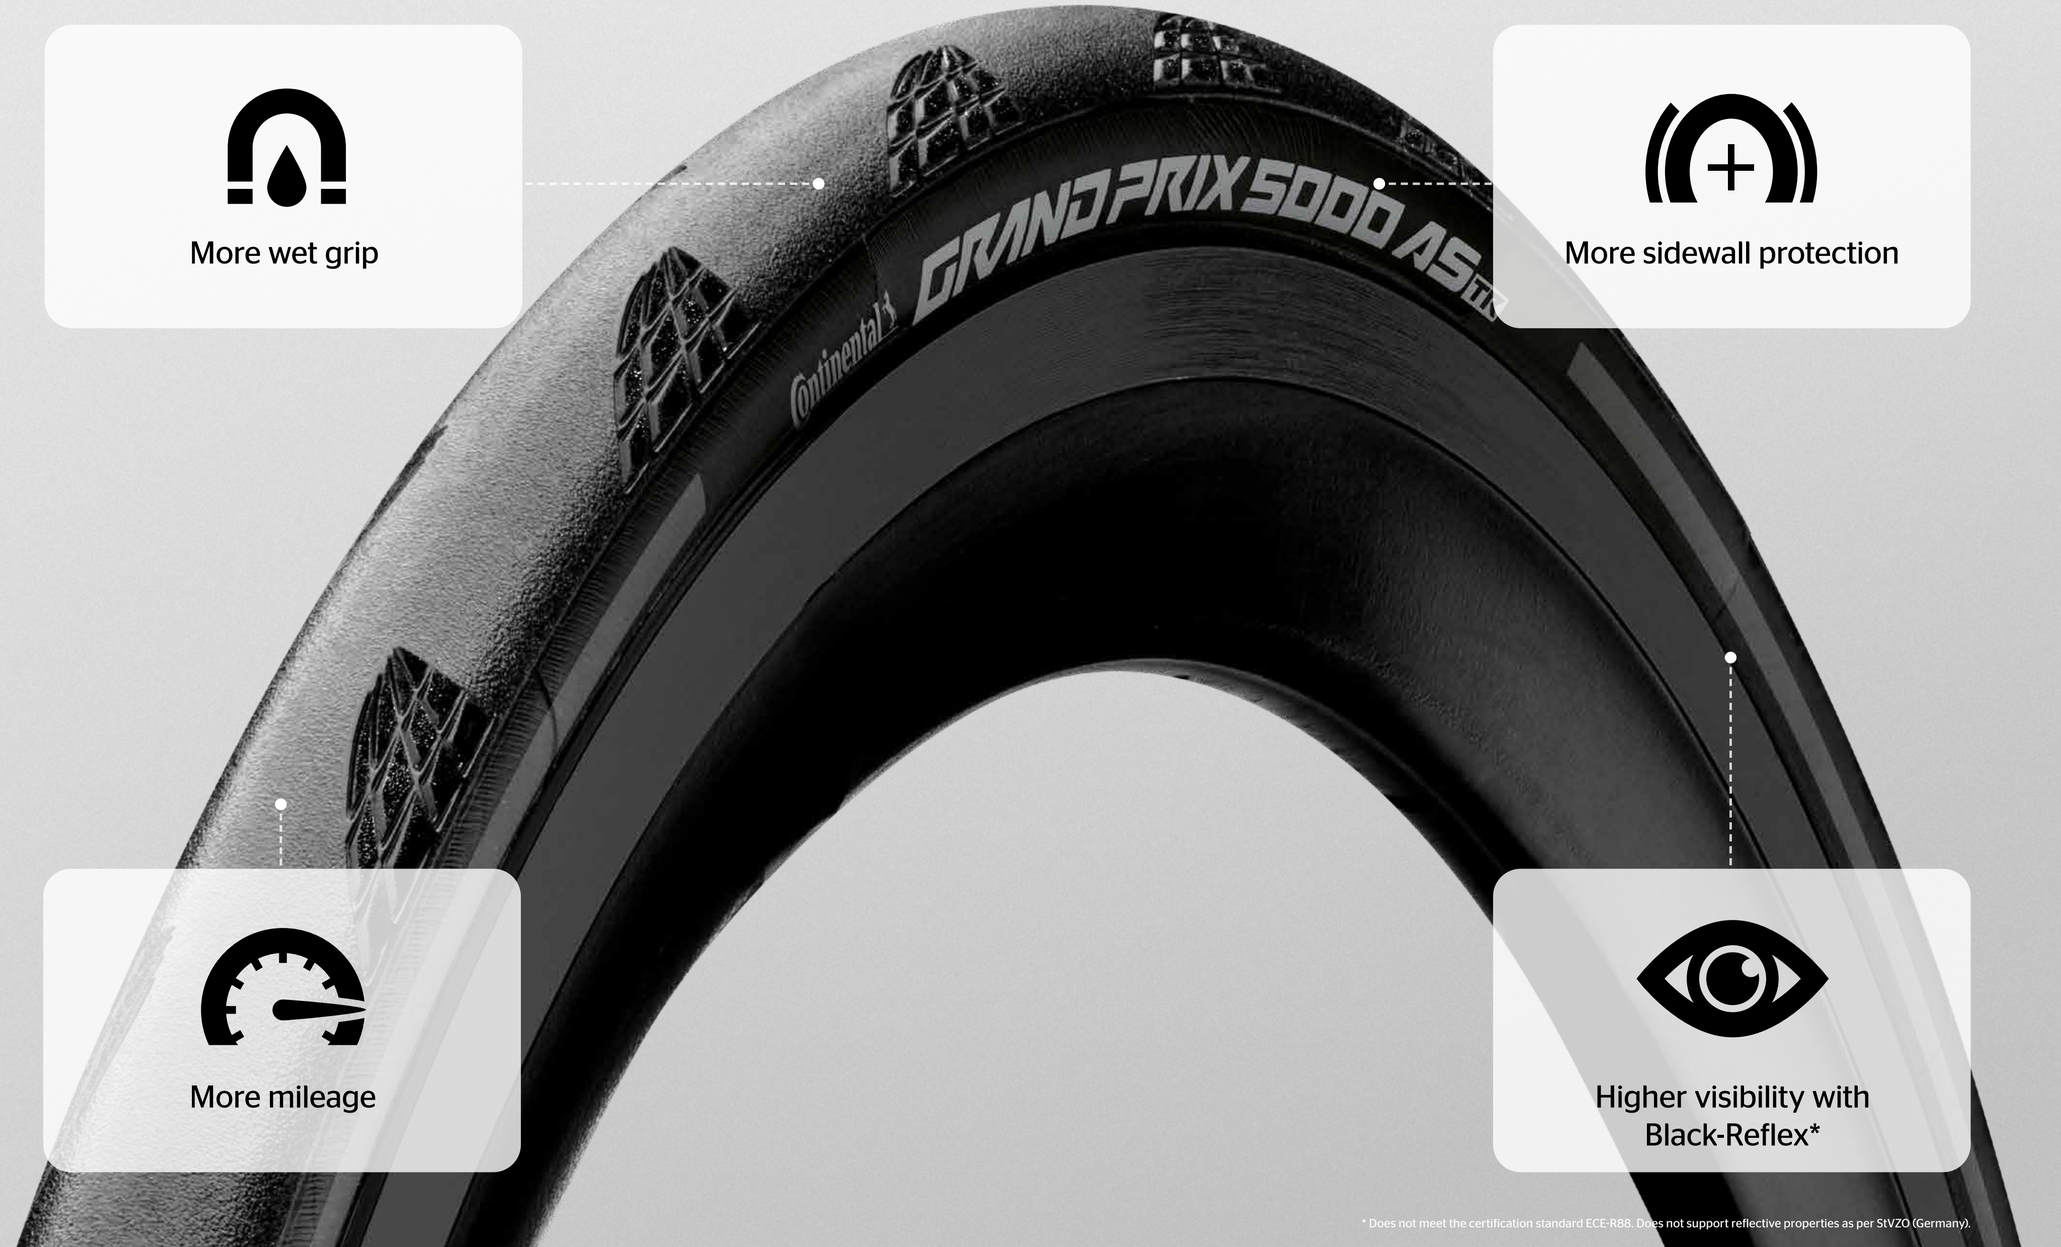

More wet grip

More sidewall protection

More mileage

Higher visibility with Black-Reflex*

* Does not meet the certification standard ECE-R88. Does not support reflective properties as per StVZO (Germany).

Grand Prix 5000 S TR

TECHNOLOGY

SIZES

FEATURES



TECHNOLOGY

SIZES

FEATURES

THE NEW ERA IN CYCLING

The proven Grand Prix 5000 S Tubeless Ready: Lighter, faster and with stronger sidewalls. The new standard in road tubeless ready technology. Ride faster, more comfortable and with increased puncture protection. Made to make you better.

BLACK CHILI COMPOUND

With our unique tread compound, we have revolutionized the sport of cycling. With the legendary **BlackChili Compound** we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.

ACTIVE COMFORT TECHNOLOGY

The revolutionary approach in cycling. Embedded in the tire construction the **Active Comfort Technology** absorbs vibrations and smoothens your ride.

Vectran™ BREAKER

Vectran is spun from liquid crystal-polymer. This way a thermoplastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker. Without effecting rolling resistance.

LAZER GRIP

Lazer Grip, to make you one with the road. The lazered micro profile structure expands over the tire's shoulder and provides outstanding cornering.

TECHNOLOGY

SIZES

FEATURES

Grand Prix 5000 S TR

BlackChili Compound - Vectran Breaker - LazerGrip - ACT - 2/220 TPI TR

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0101934	30-584	27.5“ | 650 x 30B	foldable	285	43 – 72	4 019238 063691	94,95
0101935	32-584	27.5“ | 650 x 32B	foldable	305	43 – 72	4 019238 063684	94,95
0101866	25-622	28“ | 700 x 25C	foldable	250	52 – 108	4 019238 054439	93,95
0101873	25-622	28“ | 700 x 25C	foldable	255	52 – 108	4 019238 055559	93,95
0101867	28-622	28“ | 700 x 28C	foldable	280	52 – 94	4 019238 054422	93,95
0101874	28-622	28“ | 700 x 28C	foldable	280	52 – 94	4 019238 055580	93,95
0101868	30-622	28“ | 700 x 30C	foldable	300	43 – 72	4 019238 054415	94,95
0101875	30-622	28“ | 700 x 30C	foldable	305	43 – 72	4 019238 055610	94,95
0101869	32-622	28“ | 700 x 32C	foldable	325	43 – 72	4 019238 054408	94,95
0101876	32-622	28“ | 700 x 32C	foldable	325	43 – 72	4 019238 055641	94,95
NEW 0102100	35-622	28“ | 700 x 32C	foldable	365	37 – 65	4 019238 326659	98,95

*min. – max.

BLACKCHILI COMPOUND · Vectran™ BREAKER · ACTIVE COMFORT TECHNOLOGY · LAZER GRIP · TR

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.

Grand Prix 5000 S TR

TECHNOLOGY

SIZES

FEATURES



Optimal ratio of speed and comfort

Optimal ratio of speed and puncture protection

Optimal ratio of wheight and mileage

Race proven quality

Grand Prix 5000 TT TR

TECHNOLOGY

SIZES

FEATURES



TECHNOLOGY

SIZES

FEATURES

SPECIALIST TIRE FOR RACES AGAINST THE CLOCK

The fastest Grand Prix 5000 tubeless tire for the pursuit of speed, be it in a criterium, time trial or triathlon.

BLACK CHILI COMPOUND

With our unique tread compound, we have revolutionized the sport of cycling. With the legendary **BlackChili Compound** we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.

ACTIVE COMFORT TECHNOLOGY

The revolutionary approach in cycling. Embedded in the tire construction the **Active Comfort Technology** absorbs vibrations and smoothens your ride.

Vectran™ BREAKER

Vectran is spun from liquid crystal-polymer. This way a thermoplastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker. Without effecting rolling resistance.

LAZER GRIP

Lazer Grip, to make you one with the road. The lazered micro profile structure expands over the tire's shoulder and provides outstanding cornering.

Grand Prix 5000 TT TR

TECHNOLOGY

SIZES

FEATURES

Grand Prix 5000 TT TR

BlackChili Compound - Vectran Breaker - LazerGrip - ACT - 2/220 TPI TR

	Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
	0101893	25-622	700 x 25C	● foldable	220	52 – 108	4 019238 056266	117,95
	0101894	28-622	700 x 28C	● foldable	245	52 – 94	4 019238 056273	117,95
NEW	0102101	30-622	700 x 32C	● foldable	280	43 – 72	4 019238 326604	119,95

*min. – max.

BLACK CHILI COMPOUND · Vectran™ BREAKER · ACTIVE COMFORT TECHNOLOGY · LAZER GRIP · TR

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.


This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.

Grand Prix 5000 TT TR

TECHNOLOGY

SIZES

FEATURES

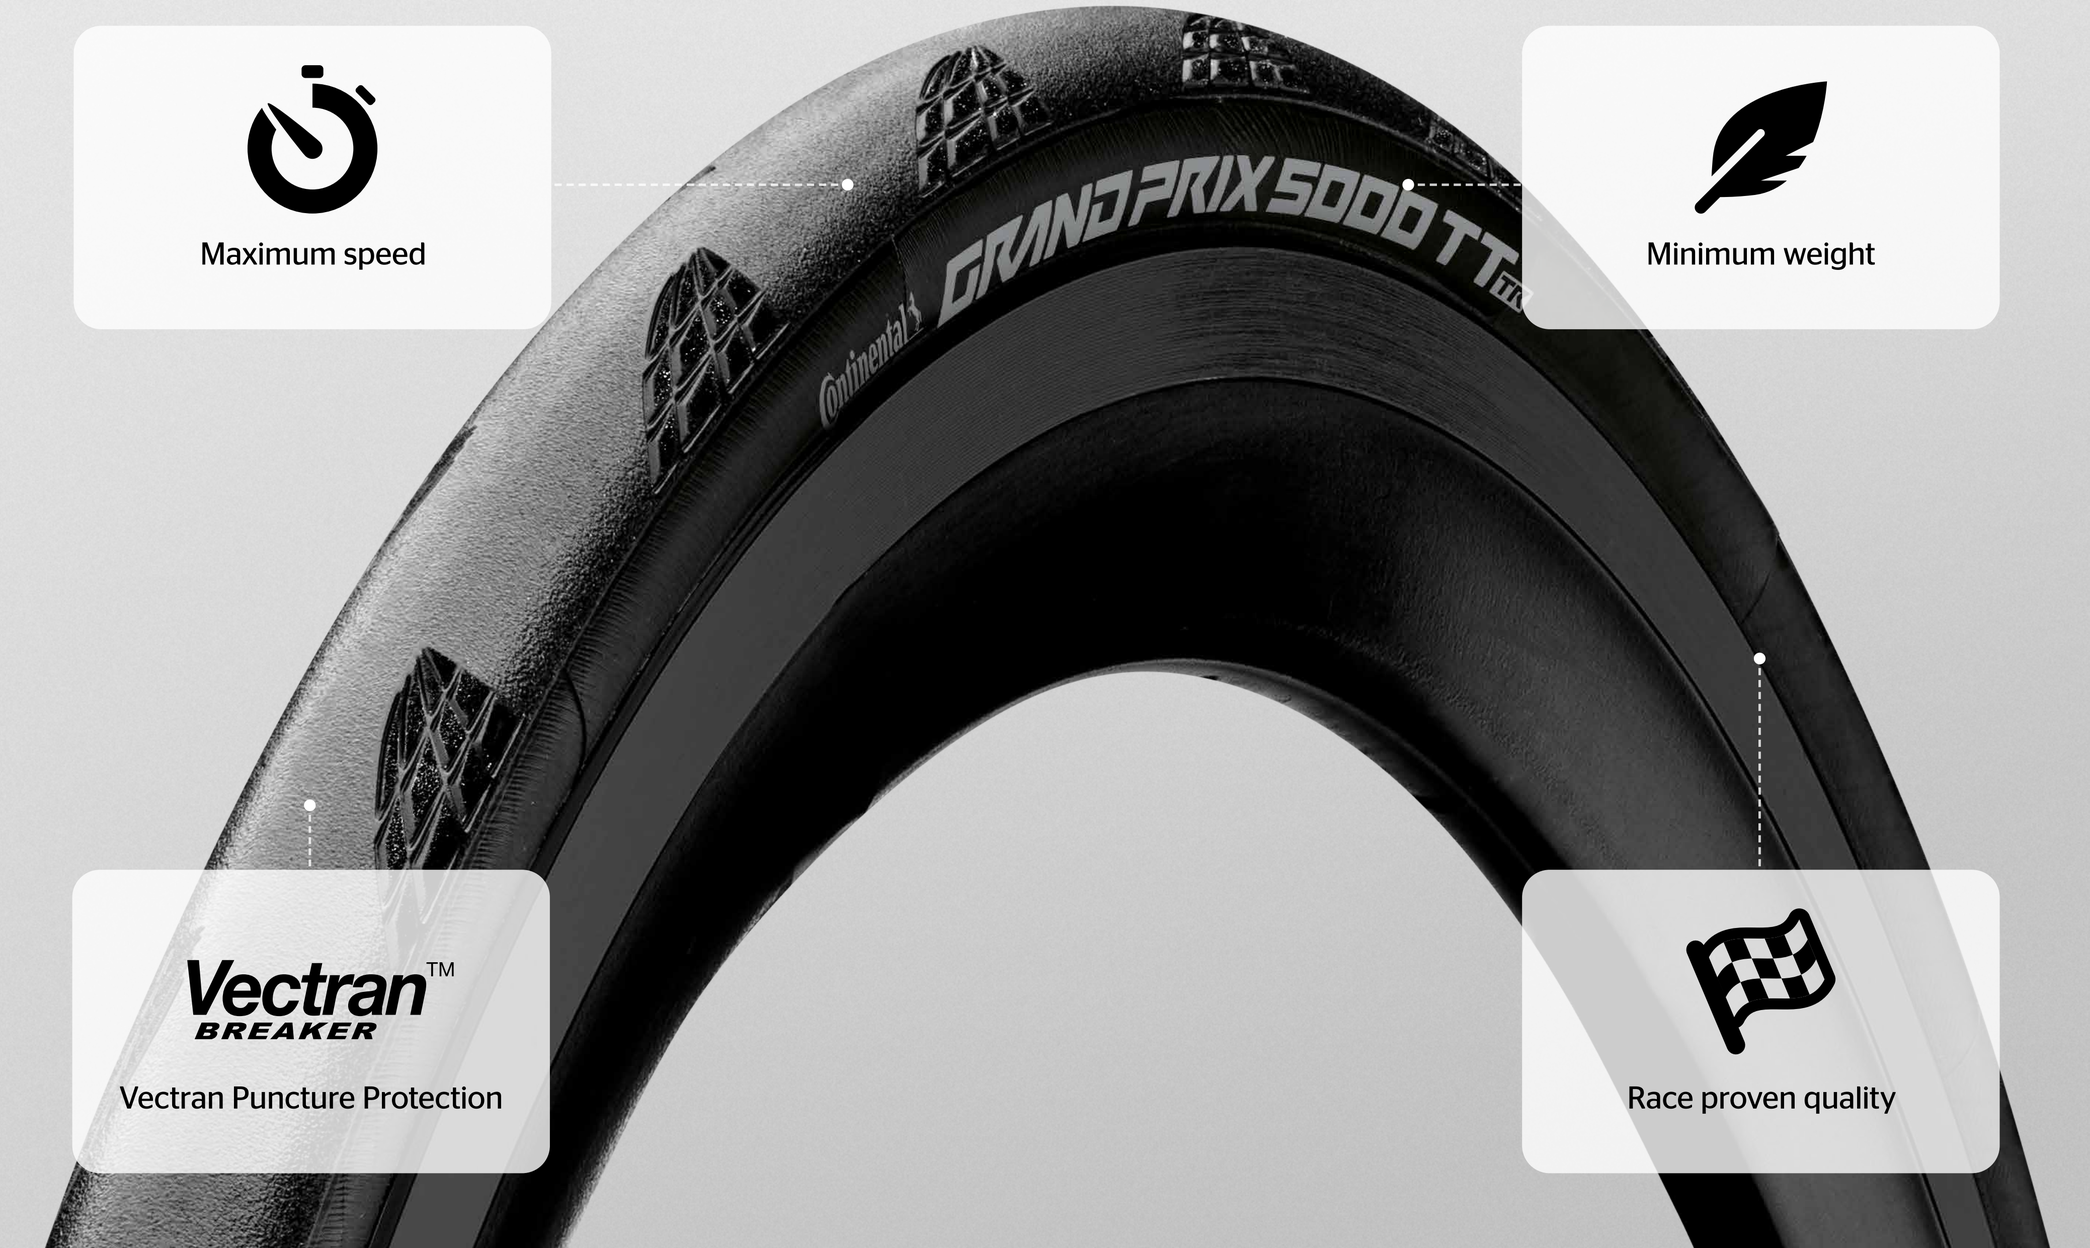

Maximum speed

Minimum weight

Vectran™ BREAKER

Vectran Puncture Protection

Race proven quality

Grand Prix 5000

TECHNOLOGY

SIZES



THE NEW ERA IN CYCLING

Ride faster, more comfortable, and with increased puncture protection. Made to make you better. If your aim is a tubeless approach, we've got you covered as well.

TECHNOLOGY

SIZES

BLACK CHILI COMPOUND

With our unique tread compound, we have revolutionized the sport of cycling. With the legendary **BlackChili Compound** we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.

ACTIVE COMFORT TECHNOLOGY

The revolutionary approach in cycling. Embedded in the tire construction the **Active Comfort Technology** absorbs vibrations and smoothens your ride.

Vectran™ BREAKER

Vectran is spun from liquid crystal-polymer. This way a thermoplastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker. Without effecting rolling resistance.

LAZER GRIP

Lazer Grip, to make you one with the road. The lazered micro profile structure expands over the tire's shoulder and provides outstanding cornering.

TECHNOLOGY

SIZES

Grand Prix 5000

BlackChili Compound - Vectran Breaker - LazerGrip - ACT - 3/330 TPI

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0101620	25-584	650 x 25B	foldable	215	52 – 123	4 019238 007817	80,95
0101622	28-584	650 x 28B	foldable	235	52 – 116	4 019238 007831	80,95
0101623	23-622	700 x 23C	foldable	205	52 – 123	4 019238 007800	80,95
0101624	25-622	700 x 25C	foldable	225	52 – 123	4 019238 007824	80,95
0101947	25-622	700 x 25C	foldable	260	52 – 123	4 019238 064711	80,95
0101895	25-622	700 x 25C	foldable	230	52 – 123	4 019238 056235	80,95
0101625	28-622	700 x 28C	foldable	245	52 – 116	4 019238 007848	80,95
0101948	28-622	700 x 28C	foldable	290	52 – 116	4 019238 064728	80,95
0101896	28-622	700 x 28C	foldable	250	52 – 116	4 019238 056242	80,95
0101626	32-622	700 x 32C	foldable	290	43 – 101	4 019238 007855	80,95
BlackChili Compound - Vectran Breaker - LazerGrip - ACT - 3/330 TPI							E50
0101813	30-622	700 x 30C	foldable	260	43 – 101	4 019238 041972	80,95

min. – max.

Faster? Not a problem with approval for e-bikes up to 50 km/h **for the size 30-622!**

Grand Prix 4-Season

TECHNOLOGY

SIZES



THE ALL-YEAR-ROUND TIRE AND A RELIABLE COMPANION FOR THOSE HIGH MILEAGE ROAD CYCLISTS

Reliable companion for training rides and in competition, come rain or shine. The tire with a superior durability ready for any season.

TECHNOLOGY

SIZES

Vectran™ BREAKER

Vectran is spun from liquid crystal-polymer. This way a thermoplastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker. Without effecting rolling resistance.

DuraSkin®

Tires with **DuraSkin®** sidewall protection can take a beating as they are designed for the most adverse conditions. In rough terrain on a cyclocross or a gravel bike, on commuter bikes where tires scrape along curbs, on touring bikes as they cross continents encountering many different road qualities and on the race circuit where they prove themselves in endurance events such as the Paris-Roubaix. The high-quality polyamide fabric reliably protects the wall of the tire. Tires with DuraSkin® can be identified by the characteristic brown mesh sidewall.

TECHNOLOGY

SIZES

Grand Prix 4-Season

Double Vectran Breaker - 3/330 TPI

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0100173	23-622	700 x 23C	● foldable	230	63 – 123	4 019238 409093	78,95
0100175	25-622	700 x 25C	● foldable	235	52 – 123	4 019238 409116	78,95
0101105	28-622	700 x 28C	● foldable	290	52 – 116	4 019238 674620	78,95
0101095	32-622	700 x 32C	● foldable	330	43 – 101	4 019238 668131	78,95

*min. – max.

Vectran™ BREAKER DuraSkin®

Ultra Sport III

TECHNOLOGY

SIZES



Test
Clincher/Folded Tires
2,1
TOUR
MAGAZINE 8/2022

MODERN TIRE FOR THOSE NEW TO ROAD CYCLING

Completely renewed, sporting a dynamic tread pattern design. Matches with a race bike, as well as a classic city road bike. Available in a wide range of dimensions and colors.

TECHNOLOGY

SIZES

PureGrip Compound is derived from an activated Silica compound and is a good example of how we integrate customer feedback continuously into our research and development. This mixture technology fits in perfectly alongside the BlackChili Compound. The name PureGrip does exactly what it says; exceptionally good grip and durability are the distinguishing features of this compound. Engineered with PureGrip in our Performance products in our road and mountain bike ranges.

Suitable for E-Bikes: For our E-Bike tire we fall back on over 100 years' experience with moped and motorcycle tires. Those tires marked are also certified for S-Pedelecs. With their high quality structure, puncture protection is high and the rolling resistance is low offering protection from premature wear brought about by the additional driving force.

Ultra Sport III

TECHNOLOGY

SIZES

Ultra Sport III

PureGrip Compound - 3/180 TPI							E25
Article	**ETRTO**	**Dimension**	**Color/sidewall**	**g**	**PSI***	**EAN**	**RRP/€**
0150449	23-622	700 x 23C	foldable	250	63 – 123	4 019238 026641	30,95
0150457	25-622	700 x 25C	foldable	265	52 – 123	4 019238 026849	30,95
0150466	28-622	700 x 28C	foldable	290	52 – 116	4 019238 026917	30,95
0150680	28-622	700 x 28C	foldable	280	52 – 116	4 019238 064629	30,95
Wire - 3/180 TPI							E25
0150450	23-622	700 x 23C	Wire	320	63 – 123	4 019238 026627	24,95
0150459	25-622	700 x 25C	Wire	340	52 – 123	4 019238 026825	24,95
0150468	28-622	700 x 28C	Wire	365	52 – 116	4 019238 026894	24,95
0150470	32-622	700 x 32C	Wire	410	43 – 101	4 019238 026924	24,95
0150471	32-630	700 x 32C	Wire	415	43 – 101	4 019238 026931	24,95

**min. – max.*

PURE GRIP COMPOUND

E25

Gator Hardshell

TECHNOLOGY

SIZES



GO HARDSHELL OR GO HOME

Ideal when it comes to extremely long service life, for the next tour or the commute. Made for for rough surfaces and rugged tarmac. With DuraSkin® sidewall reinforcement.

TECHNOLOGY

SIZES

HARDSHELL PROTECTION

Puncture protection and mileage are the strengths of **Hardshell-ProTection.** A wider PolyX Breaker™, the specialist against punctures, under the tread centre and shoulders provides for great reliability. The three-ply – each layer with 60 TPI – carcass covers the entire tire and makes it a real bastion against urban detritus. The outer sidewalls of the tire are reinforced with DuraSkin® fabric providing even more reliablility due to the casing being so well protected. Hardshell tires are the puncture-resistant flagship amongst racing tires.

DuraSkin®

Tires with **DuraSkin®** sidewall protection can take a beating as they are designed for the most adverse conditions. In rough terrain on a cyclocross or a gravel bike, on commuter bikes where tires scrape along curbs, on touring bikes as they cross continents encountering many different road qualities and on the race circuit where they prove themselves in endurance events such as the Paris-Roubaix. The high-quality polyamide fabric reliably protects the wall of the tire. Tires with DuraSkin® can be identified by the characteristic brown mesh sidewall*.

**DuraSkin® comes in restrained black with our Black Edition*

Gator Hardshell

TECHNOLOGY

SIZES

Gator Hardshell

Hardshell - 3/180 TPI

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0100311	23-622	700 x 23C	● foldable	270	63 - 123	4 019238 466379	64,95
0100313	25-622	700 x 25C	● foldable	275	52 - 123	4 019238 466409	64,95
0100639	28-622	700 x 28C	● foldable	335	52 - 116	4 019238 581423	64,95
0100640	32-622	700 x 32C	● foldable	380	43 - 101	4 019238 581416	64,95
Wire - 3/180 TPI							
0100310	23-622	700 x 23C	● Wire	345	63 - 123	4 019238 466362	58,95
0100312	25-622	700 x 25C	● Wire	345	52 - 123	4 019238 466393	58,95
0100314	28-622	700 x 28C	● Wire	410	52 - 116	4 019238 466423	58,95
0100435	32-622	700 x 32C	● Wire	450	43 - 101	4 019238 521542	58,95
0100315	32-630	27 x 1¼	● Wire	450	43 - 101	4 019238 466430	58,95

**min. - max.*

HARDSHELL PROTECTION DuraSkin®

Gator Hardshell Black Edition

Hardshell - 3/180 TPI

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0101724	23-622	700 x 23C	● foldable	270	63 - 123	4 019238 030846	69,95
0101725	25-622	700 x 25C	● foldable	275	63 - 123	4 019238 030839	69,95
0101726	28-622	700 x 28C	● foldable	335	52 - 116	4 019238 030822	69,95
0101727	32-622	700 x 32C	● foldable	380	43 - 101	4 019238 030815	69,95

**min. - max.*

HARDSHELL PROTECTION DuraSkin®

Gatorskin

TECHNOLOGY

SIZES



RIDE HOW AND WHERE YOU WANT: THE GLOBAL NUMBER ONE FOR FIXED, MESSENGER AND URBAN CYCLISTS

The right tire when it comes to tough conditions. The right choice for a strong performance in the urban field and on tour.

TECHNOLOGY

SIZES

PolyX Breaker™

With **PolyX Breaker™** car expertise comes to the bicycle tire sector. Polyester has been used successfully for years in car tires and has proved extremely effective. The extremely resistant polyester fibre is woven tightly crosswise. A very high fabric density is achieved which makes the breaker resistant not only to foreign bodies, but especially to punctures. The rolling resistance is not affected by this breaker.

DuraSkin®

Tires with **DuraSkin®** sidewall protection can take a beating as they are designed for the most adverse conditions. In rough terrain on a cyclocross or a gravel bike, on commuter bikes where tires scrape along curbs, on touring bikes as they cross continents encountering many different road qualities and on the race circuit where they prove themselves in endurance events such as the Paris-Roubaix. The high-quality polyamide fabric reliably protects the wall of the tire. Tires with DuraSkin® can be identified by the characteristic brown mesh sidewall*.

**DuraSkin® comes in restrained black with our Black Edition*

Gatorskin

TECHNOLOGY

SIZES

Gatorskin

PolyX Breaker - 3/180 TPI

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0118538	23-622	700 x 23C	● foldable	235	63 - 123	4 019238 334647	55,95
0100084	25-622	700 x 25C	● foldable	250	52 - 123	4 019238 371390	55,95
0100641	28-622	700 x 28C	● foldable	290	52 - 116	4 019238 581430	55,95
0100642	32-622	700 x 32C	● foldable	355	43 - 101	4 019238 581447	55,95

Wire - 3/180 TPI

0118365	28-559	26 x 1⅛	● Wire	330	52 - 116	4 019238 334708	50,95
0118364	23-571	650 x 23C	● Wire	280	63 - 123	4 019238 334692	50,95
0118537	23-622	700 x 23C	● Wire	310	63 - 123	4 019238 334630	50,95
0118539	25-622	700 x 25C	● Wire	320	52 - 123	4 019238 334661	50,95
0121228	28-622	700 x 28C	● Wire	365	52 - 116	4 019238 334678	50,95
0100437	32-622	700 x 32C	● Wire	425	43 - 101	4 019238 521573	50,95
0122300	32-630	27 x 1¼	● Wire	425	43 - 101	4 019238 334685	50,95

*min. - max.

PolyX Breaker™ DuraSkin®

Gatorskin Black Edition

PolyX Breaker - 3/180 TPI

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0101728	23-622	700 x 23C	● foldable	235	52 - 116	4 019238 030877	61,95
0101729	25-622	700 x 25C	● foldable	250	52 - 123	4 019238 030860	69,95
0101730	28-622	700 x 28C	● foldable	290	52 - 116	4 019238 030884	69,95
0101731	32-622	700 x 32C	● foldable	355	43 - 101	4 019238 030853	69,95

*min. - max.

PolyX Breaker™ DuraSkin®

Grand Sport Race

TECHNOLOGY

SIZES



TECHNOLOGY

SIZES

PROVEN RACING TIRE CONTOUR FOR RESPONSIVE HANDLING AND SECURE GRIP

Performance in touring and competition. This all-rounder is ready for every challenge, even the biggest ones.

PURE GRIP COMPOUND

PureGrip Compound is derived from an activated Silica compound and is a good example of how we integrate customer feedback continuously into our research and development. This mixture technology fits in perfectly alongside the BlackChili Compound. The name PureGrip does exactly what it says; exceptionally good grip and durability are the distinguishing features of this compound. Engineered with PureGrip in our Performance products in our road and mountain bike ranges.

Nytech BREAKER

The **Nytech Breaker** is based on the technology of our Safety-System puncture protection. Made of nylon fibre and similar to Kevlar, it reliably protects against punctures and cuts. It also has particularly low rolling resistance and reduced weight, perfect for our performance range of road tires.

Grand Sport Race

TECHNOLOGY

SIZES

Grand Sport Race

PureGrip Compound - NyTech Breaker - 3/180 TPI

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0150001	23-622	700 X 23C	● foldable	245	63 – 123	4 019238 586565	41,95
0150027	25-622	700 X 25C	● foldable	270	52 – 123	4 019238 587319	41,95
0150118	28-622	700 X 28C	● foldable	335	52 – 116	4 019238 621105	41,95
0150141	32-622	700 X 32C	● foldable	400	43 – 101	4 019238 656602	41,95

min. – max.

Hometrainer II

TECHNOLOGY

SIZES



THE KM ACCUMULATOR ON THE ROLLERS

Developed for the essential basic training at home. Particularly smooth running. The durable cold-running compound stops heat build up.

! Suitable for training on rollers/home trainers only.

TECHNOLOGY


SIZES

Hometrainer II

Foldable - 3/180 TPI

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0100648	47-559	26 x 1.75	● foldable	375	29 – 65	4 019238 581454	43,95
0101275	50-584	27.5 x 2.00	● foldable	385	26 – 65	4 019238 730456	43,95
0100647	23-622	700 x 23C	● foldable	210	63 – 123	4 019238 581461	43,95
0100649	32-622	700 x 32C	● foldable	280	43 – 101	4 019238 581478	43,95

**min. – max.*

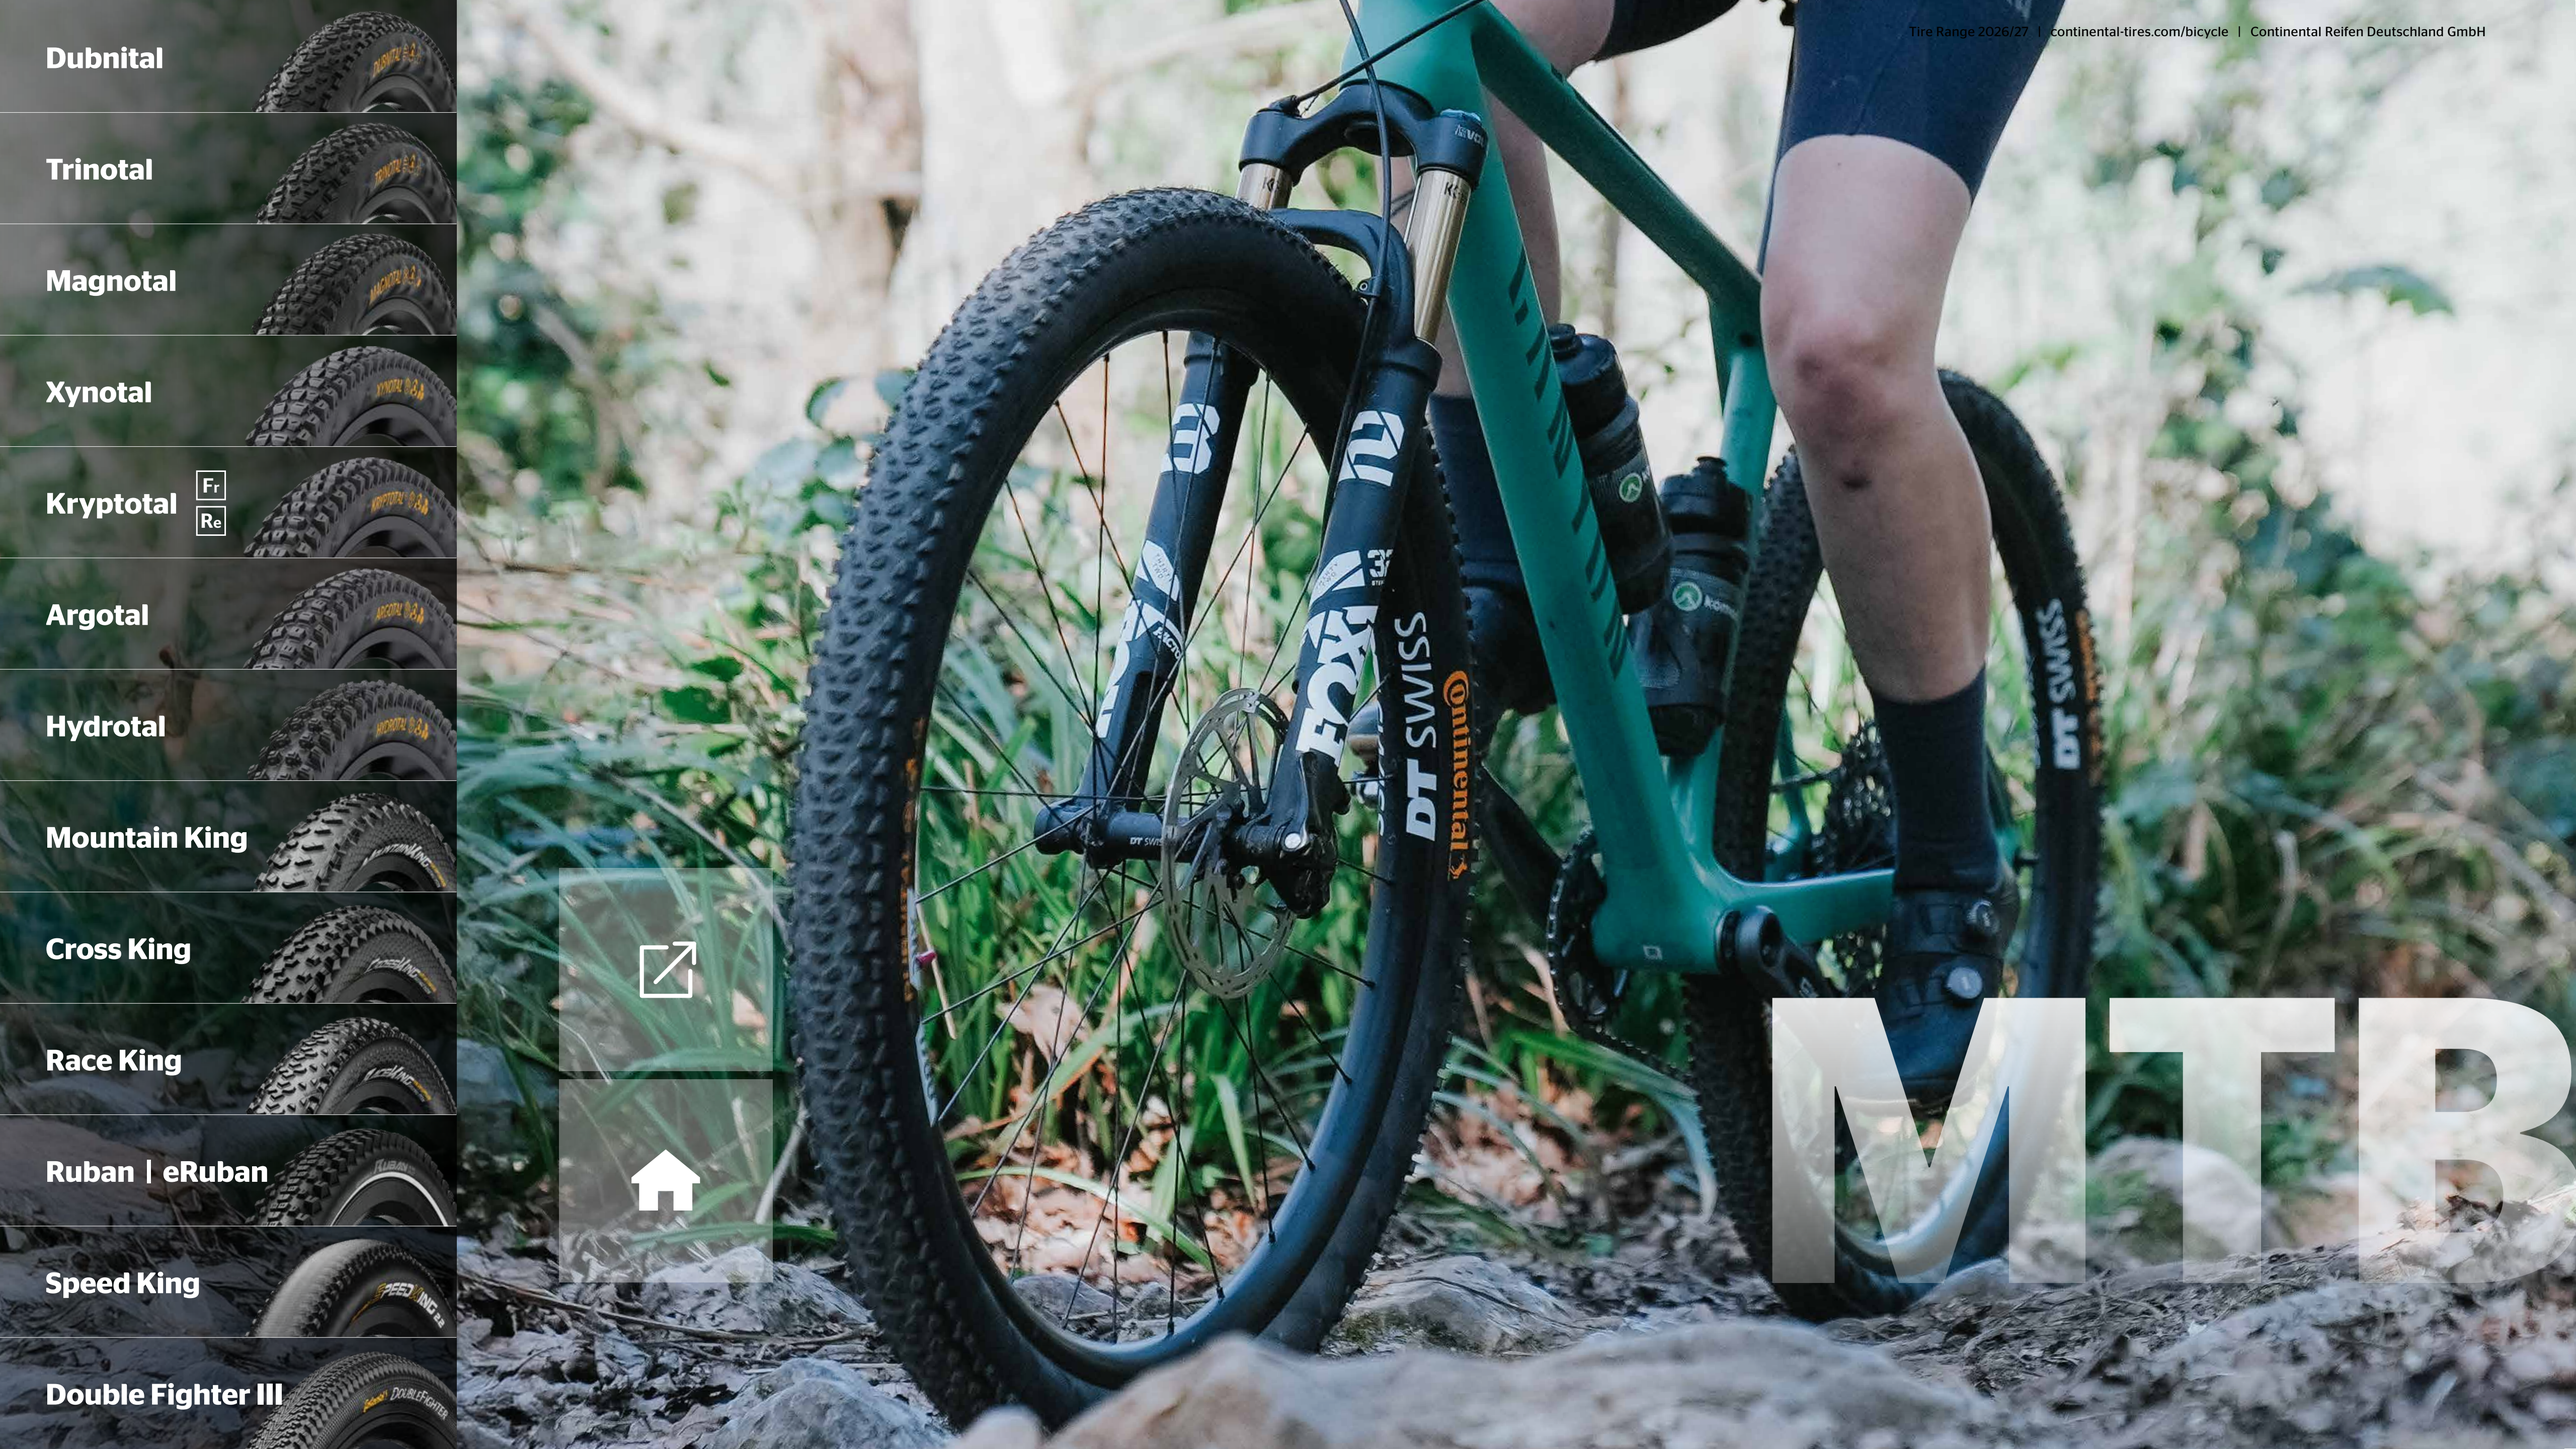

MTB

Dubnital
Trinotal
Magnotal
Xynotal
Kryptotal Fr Re
Argotal
Hydrotal
Mountain King
Cross King
Race King
Ruban | eRuban
Speed King
Double Fighter III

Dubnital

TECHNOLOGY

SIZES



MASTER OF SPEED

Dubnital is designed for dry to damp conditions and for rocky, hardpack, and medium loose soils. Master the challenges of modern cross-country and down-country riding at speed. Dubnital supersedes its predecessor, the championed 'Race King', and takes performance to the next level.

TECHNOLOGY

SIZES

TERRAIN

Ideal for **hardpack** terrain

CASING

Trail: A light and durable single-ply carcass construction, ideal for Trail use cases.

Race: The lightest and fastest construction in our MTB line-up. Perfect for modern Cross and Down-Country riding and racing

COMPOUND

Grip: Designed for modern Cross-Country, Down-Country, Trail and gravel use cases. This compound offers an excellent balance of grip and rolling resistance and is the number one choice for all-round balanced characteristics.

Rapid: When speed and acceleration on flat and inclines is all that matters, then the Rapid compound is your go-to option. Inspired by the characteristics of compounds used in our road, race and gravel tires.

Dubnital

TECHNOLOGY

SIZES

Dubnital

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
Race Rapid - 3/330 TPI						**E25**	**TR**
0102041	55-622	29 x 2.20	foldable	590	26 – 58	4 019238 402797	79,95
0102037	60-622	29 x 2.40	foldable	625	23 – 50	4 019238 402629	79,95
0102038	60-622	29 x 2.40	foldable	660	23 – 50	4 019238 402605	79,95
Race Grip - 3/330 TPI						**E25**	**TR**
0102039	60-622	29 x 2.40	foldable	630	23 – 50	4 019238 402582	74,95
0102040	60-622	29 x 2.40	foldable	665	23 – 50	4 019238 402568	74,95
Trail Rapid - 3/330 TPI						**E25**	**TR**
0150788	55-584	27.5 x 2.20	foldable	615	26 – 58	4 019238 402766	74,95
0150787	60-584	27.5 x 2.40	foldable	645	23 – 50	4 019238 402773	74,95
0150786	55-622	29 x 2.20	foldable	655	26 – 58	4 019238 402810	74,95
0150782	60-622	29 x 2.40	foldable	685	23 – 50	4 019238 402896	74,95
0150783	60-622	29 x 2.40	foldable	685	23 – 50	4 019238 402872	74,95
Trail Grip - 3/330 TPI						**E25**	**TR**
0150784	60-622	29 x 2.40	foldable	730	23 – 50	4 019238 402858	69,95
0150785	60-622	29 x 2.40	foldable	725	23 – 50	4 019238 402834	69,95

**min. – max.*

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.

Trinotal

TECHNOLOGY

SIZES



CONTROL THE TERRAIN

Trinotal is truly versatile, designed to be ridden on hard and light mixed soils whether dry or damp. Trinotal supersedes its predecessor, the popular 'Cross King'. Conquer the varied challenges of modern cross-country and down-country riding.

TECHNOLOGY

SIZES

TERRAIN

Ideal for **hardpack** and **mixed** terrain

CASING

Trail: A light and durable single-ply carcass construction, ideal for Trail use cases.

Race: The lightest and fastest construction in our MTB line-up. Perfect for modern Cross and Down-Country riding and racing

COMPOUND

Grip: Designed for modern Cross-Country, Down-Country, Trail and gravel use cases. This compound offers an excellent balance of grip and rolling resistance and is the number one choice for all-round balanced characteristics.

Rapid: When speed and acceleration on flat and inclines is all that matters, then the Rapid compound is your go-to option. Inspired by the characteristics of compounds used in our road, race and gravel tires.

Trinotal

TECHNOLOGY

SIZES

Trinotal

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
Race Rapid - 3/330 TPI						E25 TR	
0102032	60-622	29 x 2.40	foldable	715	23 – 50	4 019238 402544	79,95
0102033	60-622	29 x 2.40	foldable	750	23 – 50	4 019238 402520	79,95
Race Grip - 3/330 TPI						E25 TR	
0102036	55-622	29 x 2.20	foldable	605	26 – 58	4 019238 402469	74,95
0102034	60-622	29 x 2.40	foldable	700	23 – 50	4 019238 402506	74,95
0102035	60-622	29 x 2.40	foldable	735	23 – 50	4 019238 402483	74,95
Trail Rapid - 3/330 TPI						E25 TR	
0150774	60-622	29 x 2.40	foldable	715	23 – 50	4 019238 402759	74,95
0150775	60-622	29 x 2.40	foldable	715	23 – 50	4 019238 402735	74,95
Trail Grip - 3/330 TPI						E25 TR	
0150781	55-559	26 x 2.20	foldable	610	26 – 58	4 019238 402636	66,95
0150780	55-584	27.5 x 2.20	foldable	635	26 – 58	4 019238 402643	69,95
0150779	60-584	27.5 x 2.40	foldable	710	23 – 50	4 019238 402650	69,95
0150778	55-622	29 x 2.20	foldable	685	26 – 58	4 019238 402674	69,95
0150776	60-622	29 x 2.40	foldable	740	23 – 50	4 019238 402711	69,95
0150777	60-622	29 x 2.40	foldable	740	23 – 50	4 019238 402698	69,95

*min. – max.

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.

Magnotal

TECHNOLOGY

SIZES



DOMINATE WHEREVER YOU RIDE

Magnotal is designed for dry to wet conditions for hard, loose or muddy soils. It is the go-to solution for aggressive down-country, all-mountain and trail use cases. The newly designed tread pattern and casing sets a new standard for an all-rounder MTB tire – closing the gap to our Gravity range.

TECHNOLOGY

SIZES

TERRAIN

Ideal for **mixed** and **loose** terrain

CASING

Trail: A light and durable single-ply carcass construction, ideal for Trail use cases.

COMPOUND

Soft: Designed for descending-orientated use cases in the Trail and Enduro segment. The Soft compound offers high levels of grip with reasonable rolling resistance. Useable as a complete Front-Rear combination or a Front-wheel-only option for increased grip in Trail and All-Mountain use cases.

Grip: Designed for modern Cross-Country, Down-Country, Trail and gravel use cases. This compound offers an excellent balance of grip and rolling resistance and is the number one choice for all-round balanced characteristics.

Magnotal

TECHNOLOGY

SIZES

Magnotal

Trail Soft - 3/330 TPI

E25 TR

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0150771	60-584	27.5 x 2.40	foldable	800	23 – 50	4 019238 401967	72,95
0150836	60-584	27.5 x 2.40	foldable	780	23 – 50	4 019238 326826	72,95
0150773	65-584	27.5 x 2.60	foldable	895	20 – 43	4 019238 401929	76,95
0150765	60-622	29 x 2.40	foldable	840	23 – 50	4 019238 402063	72,95
0150766	60-622	29 x 2.40	foldable	830	23 – 50	4 019238 402049	72,95
0150769	65-622	29 x 2.60	foldable	965	20 – 43	4 019238 402001	76,95

Trail Grip - 3/330 TPI

E25 TR

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0150770	60-584	27.5 x 2.40	foldable	745	23 – 50	4 019238 401981	69,95
0150772	65-584	27.5 x 2.60	foldable	905	20 – 43	4 019238 401943	74,95
0150763	60-622	29 x 2.40	foldable	800	23 – 50	4 019238 402100	69,95
0150764	60-622	29 x 2.40	foldable	800	23 – 50	4 019238 402087	69,95
0150768	65-622	29 x 2.60	foldable	960	20 – 43	4 019238 402025	74,95
0150835	60-584	27.5 x 2.40	foldable	765	23 – 50	4 019238 326802	69,95

min. – max.

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.

Xynotal

TECHNOLOGY

SIZES



CONTROL OVER ROCK AND HARDPACK TERRAIN

With low rolling resistance and contact edges for improved traction and braking, you can enjoy a fast gravity ride with the confidence of continuous grip when you need it most.

TECHNOLOGY

SIZES

TERRAIN

Perfect for **hardpack,** rocky surfaces

CASING

Downhill: Most durable and reinforced carcass construction in gravity line up

Enduro: Durable single ply carcass construction with Apex to prevent snakebites

Trail: Comparable performance to the Enduro casing tailored for trail use cases

COMPOUND

SuperSoft: Especially for Downhill and Enduro use cases where the main focus is descending. Tires equipped with this compound are for riders with a 100% focus on grip, traction, control.

Soft: The balance of grip and rolling resistance for gravity focussed use cases. High level of grip with a reasonable rolling resistance.

Endurance: Compound with balanced properties on grip and endurance. With the endurance compound a high durability in combination with good rolling resistance and grip is achieved.

Xynotal

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
Downhill SuperSoft - 6/660 TPI							
0101931	60-584	27.5 x 2.40	foldable	1260	23 – 50	4 019238 063370	96,95
0101932	60-622	29 x 2.40	foldable	1335	23 – 50	4 019238 063356	96,95
Downhill Soft - 6/660 TPI							
0101995	60-584	27.5 x 2.40	foldable	1260	23 – 50	4 019238 080742	91,95
0101996	60-622	29 x 2.40	foldable	1340	23 – 50	4 019238 080735	91,95
Enduro SuperSoft - 3/330 TPI							
NEW 0102081	60-584	27.5 x 2.40	foldable	1130	23 – 50	4 019238 313536	86,95
NEW 0102080	60-622	29 x 2.40	foldable	1200	23 – 50	4 019238 313567	86,95
Enduro Soft - 3/330 TPI							
0150644	60-584	27.5 x 2.40	foldable	1100	23 – 50	4 019238 063295	80,95
0150645	60-622	29 x 2.40	foldable	1165	23 – 50	4 019238 063288	80,95
Trail Endurance - 3/180 TPI							
0150646	60-584	27.5 x 2.40	foldable	1000	23 – 50	4 019238 063257	67,95
0150647	60-622	29 x 2.40	foldable	1060	23 – 50	4 019238 063240	67,95
0150823	65-584	27.5 x 2.60	foldable	1155	20 – 43	4 019238 309218	67,95
Trail Soft - 3/180 TPI							
NEW 0150832	60-584	27.5 x 2.40	foldable	1000	23 – 50	4 019238 319569	73,95
NEW 0150833	60-622	29 x 2.40	foldable	1055	23 – 50	4 019238 319552	73,95

E25 TR

*min. – max.

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.

TECHNOLOGY

SIZES Fr

SIZES Re



TECHNOLOGY
SIZES Fr
SIZES Re

SPECIALISTS FOR MIXED TERRAIN

Optimized for front and rear wheels, this all-round tire achieves the perfect balance of stability, traction and optimal rolling resistance. Ideal for mixed terrain, they'll allow you to push your limits during trail, enduro and downhill riding.

TERRAIN

Ideal for **mixed** terrain conditions

CASING

Downhill: Most durable and reinforced carcass construction in gravity line up

Enduro: Durable single ply carcass construction with Apex to prevent snakebites

Trail: Comparable performance to the Enduro casing tailored for trail use cases

COMPOUND

SuperSoft: Especially for Downhill and Enduro use cases where the main focus is descending. Tires equipped with this compound are for riders with a 100% focus on grip, traction, control.

Soft: The balance of grip and rolling resistance for gravity focussed use cases. High level of grip with a reasonable rolling resistance.

Endurance: Compound with balanced properties on grip and endurance. With the endurance compound a high durability in combination with good rolling resistance and grip is achieved.

TECHNOLOGY
SIZES Fr
SIZES Re

Kryptotal Fr

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
Downhill SuperSoft - 6/660 TPI							
0101956	60-584	27.5 x 2.40	foldable	1260	23 – 50	4 019238 070514	96,95
0101957	60-622	29 x 2.40	foldable	1335	23 – 50	4 019238 070491	96,95
Downhill Soft - 6/660 TPI							
0150818	60-622	29 x 2.40	foldable	1305	23 – 50	4 019238 309270	91,95
Enduro SuperSoft - 3/330 TPI							
NEW 0102077	60-584	27.5 x 2.40	foldable	1130	23 – 50	4 019238 313604	86,95
0102074	60-622	29 x 2.40	foldable	1205	23 – 50	4 019238 309263	86,95
Enduro Soft - 3/330 TPI							
0150705	60-559	26 x 2.40	foldable	1055	23 – 50	4 019238 089752	75,95
0150694	60-584	27.5 x 2.40	foldable	1100	23 – 50	4 019238 074116	80,95
0150696	60-622	29 x 2.40	foldable	1165	23 – 50	4 019238 074079	80,95
0150820	65-622	29 x 2.60	foldable	1315	20 – 43	4 019238 309249	86,95
Trail Soft - 3/180 TPI							
NEW 0150827	60-584	27.5 x 2.40	foldable	1000	23 – 50	4 019238 320398	73,95
0150819	60-622	29 x 2.40	foldable	1060	20 – 43	4 019238 309256	73,95
Trail Endurance - 3/180 TPI							
0150725	60-406	20 x 2.40	foldable	685	26 – 58	4 019238 098020	58,95
0150709	60-507	24 x 2.40	foldable	840	23 – 50	4 019238 089776	64,95
0150695	60-584	27.5 x 2.40	foldable	1000	23 – 50	4 019238 074093	67,95
0150697	60-622	29 x 2.40	foldable	1060	23 – 50	4 019238 074055	64,95
0150821	65-622	29 x 2.60	foldable	1240	20 – 43	4 019238 309232	67,95

Downhill SuperSoft - 6/660 TPI — E25 TR

TR E25

*min. – max.

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.

TECHNOLOGY
SIZES Fr
SIZES Re

Kryptotal Re

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
Downhill SuperSoft - 6/660 TPI							
0101928	60-584	27.5 x 2.40	foldable	1260	23 – 50	4 019238 063219	96,95
0101930	60-622	29 x 2.40	foldable	1335	23 – 50	4 019238 063196	96,95
Downhill Soft - 6/660 TPI							
0101991	60-584	27.5 x 2.40	foldable	1260	23 – 50	4 019238 080780	91,95
0101992	60-622	29 x 2.40	foldable	1340	23 – 50	4 019238 080773	91,95
0150822	65-584	27.5 x 2.60	foldable	1405	20 – 43	4 019238 309225	96,95
Enduro SuperSoft - 3/330 TPI							
NEW 0102079	60-584	27.5 x 2.40	foldable	1130	23 – 50	4 019238 313574	86,95
NEW 0102078	60-622	29 x 2.40	foldable	1205	23 – 50	4 019238 313598	86,95
Enduro Soft - 3/330 TPI							
0150707	60-559	26 x 2.40	foldable	1055	23 – 50	4 019238 089738	75,95
0150632	60-584	27.5 x 2.40	foldable	1100	23 – 50	4 019238 063134	80,95
0150634	60-622	29 x 2.40	foldable	1165	23 – 50	4 019238 063127	80,95
0150635	65-584	27.5 x 2.60	foldable	1240	23 – 43	4 019238 063097	86,95
0150636	65-622	29 x 2.60	foldable	1315	20 – 43	4 019238 063080	86,95

E25 TR

*min. – max.

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.

TECHNOLOGY
SIZES Fr
SIZES Re

Kryptotal Re

Trail Soft - 3/180 TPI							E25	TR
Article	**ETRTO**	**Dimension**	**Color/sidewall**	**g**	**PSI***	**EAN**		**RRP/€**
NEW 0150828	60-584	27.5 x 2.40	● foldable	1000	23 – 50	4 019238 320381		73,95
NEW 0150829	60-622	29 x 2.40	● foldable	1060	23 – 50	4 019238 320084		73,95
Trail Endurance - 3/180 TPI								
0150724	60-406	20 x 2.40	● foldable	685	26 – 58	4 019238 098044		58,95
0150708	60-507	24 x 2.40	● foldable	840	23 – 50	4 019238 089790		64,95
0150637	60-584	27.5 x 2.40	● foldable	1000	23 – 50	4 019238 063059		67,95
0150638	60-622	29 x 2.40	● foldable	1060	23 – 50	4 019238 063042		67,95
0150639	65-584	27.5 x 2.60	● foldable	1155	20 – 43	4 019238 063011		73,95
0150640	65-622	29 x 2.60	● foldable	1240	20 – 43	4 019238 063004		73,95

*min. – max.

Argotal

TECHNOLOGY

SIZES



ENGINEERED FOR LOOSE CONDITIONS

The ideal tire for loose terrain given its incredible cornering stability and enhanced side-grip. The open tread pattern allows for self-cleaning so you can push your limits while riding through dust and loam.

TECHNOLOGY

SIZES

TERRAIN

Ideal for **loose** terrain

CASING

Downhill: Most durable and reinforced carcass construction in gravity line up

Enduro: Durable single ply carcass construction with Apex to prevent snakebites

Trail: Comparable performance to the Enduro casing tailored for trail use cases

COMPOUND

SuperSoft: Especially for Downhill and Enduro use cases where the main focus is descending. Tires equipped with this compound are for riders with a 100% focus on grip, traction, control.

Soft: The balance of grip and rolling resistance for gravity focussed use cases. High level of grip with a reasonable rolling resistance.

Endurance: Compound with balanced properties on grip and endurance. With the endurance compound a high durability in combination with good rolling resistance and grip is achieved.

Argotal

TECHNOLOGY

SIZES

Argotal

Downhill SuperSoft - 6/660 TPI

E25 TR

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0101951	60-584	27.5 x 2.40	foldable	1260	23 – 50	4 019238 067866	96,95
0101953	60-622	29 x 2.40	foldable	1335	23 – 50	4 019238 067842	96,95

Downhill Soft - 6/660 TPI

	0101999	60-584	27.5 x 2.40	foldable	1260	23 – 50	4 019238 080704	91,95
	0102000	60-622	29 x 2.40	foldable	1340	23 – 50	4 019238 080698	91,95

Enduro SuperSoft - 3/330 TPI

NEW	0102076	60-584	27.5 x 2.40	foldable	1130	23 – 50	4 019238 313611	86,95
	0102073	60-622	29 x 2.40	foldable	1205	23 – 50	4 019238 309287	86,95

Enduro Soft - 3/330 TPI

	0150684	60-584	27.5 x 2.40	foldable	1100	23 – 50	4 019238 068016	80,95
	0150686	60-622	29 x 2.40	foldable	1100	23 – 50	4 019238 068078	80,95
	0150685	65-584	27.5 x 2.60	foldable	1240	20 – 43	4 019238 067910	86,95
	0150688	65-622	29 x 2.60	foldable	1315	20 – 43	4 019238 067958	86,95

Trail Soft - 3/180 TPI

NEW	0150830	60-584	27.5 x 2.40	foldable	1000	23 – 50	4 019238 320039	73,95
NEW	0150831	60-622	29 x 2.40	foldable	1055	23 – 50	4 019238 320022	73,95

Trail Endurance - 3/180 TPI

	0150689	60-584	27.5 x 2.40	foldable	1000	23 – 50	4 019238 067972	67,95
	0150691	60-622	29 x 2.40	foldable	1060	23 – 50	4 019238 068030	67,95
	0150690	65-584	27.5 x 2.60	foldable	1155	20 – 43	4 019238 067897	73,95
	0150692	65-622	29 x 2.60	foldable	1245	20 – 43	4 019238 067934	73,95

TR E25

*min. – max.

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.

Hydrotal

TECHNOLOGY

SIZES



DOMINATES THE WET AND MUD

Our specialist tire for downhill riding which also provides a super-soft compound option for racing. Hydrotal balances grip and rolling resistance and features a self-cleaning tread to ensure consistent grip when you're shredding through muddy, slippery conditions.

TECHNOLOGY

SIZES

TERRAIN

Specialist for **mud** terrain

CASING

Downhill: Most durable and reinforced carcass construction in gravity line up

COMPOUND

SuperSoft: Especially for Downhill and Enduro use cases where the main focus is descending. Tires equipped with this compound are for riders with a 100% focus on grip, traction, control.

Hydrotal

TECHNOLOGY

SIZES

Hydrotal

Downhill SuperSoft - 6/660 TPI

E25 TR

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0101954	60-584	27.5 x 2.40	● foldable	1260	23 – 50	4 019238 067880	96,95
0101955	60-622	29 x 2.40	● foldable	1335	23 – 50	4 019238 067873	96,95

**min. – max.*

TR E25

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.

Mountain King

TECHNOLOGY

SIZES



FOR SAFE OFF-ROADING

The perfect trail ride companion - not stingy on grip, ideal for full-suspension trail bikes. The snappy central knobs and grippy outer knobs means it offers maximum grip.

TECHNOLOGY

SIZES

PureGrip Compound is derived from an activated Silica compound and is a good example of how we integrate customer feedback continuously into our research and development. This mixture technology fits in perfectly alongside the BlackChili Compound. The name PureGrip does exactly what it says; exceptionally good grip and durability are the distinguishing features of this compound. Engineered with PureGrip in our Performance products in our road and mountain bike ranges.

The **ShieldWall System** combines the optimum combination of high puncture protection and the low rolling resistance with low weight. This is made possible by an additional, all-round puncture protection layer, which consists of a finely woven cross fabric. This gives the tire a high resistance to punctures and damage. Despite its additional ply, the tire has a very good damping property and a high degree of flexibility to adapt perfectly to the ground. The revolutionary tubeless ready bead allows easy and uncomplicated mounting of the tire. For best results in sealing and in use, we recommend the use of the new Continental RevoSealant sealant.

Mountain King

TECHNOLOGY

SIZES

Mountain King

PureGrip Compound - ShieldWall System - 3/180 TPI — E25 TR

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0150301	58-559	26 x 2.30	foldable	720	26 – 55	4 019238 798333	43,95
0150289	58-584	27.5 x 2.30	foldable	770	26 – 55	4 019238 798302	43,95
0150335	65-584	27.5 x 2.60	foldable	935	20 – 43	4 019238 003598	48,95
0150334	70-584	27.5 x 2.80	foldable	1015	17 – 40	4 019238 003628	48,95
0150294	58-622	29 x 2.30	foldable	805	26 – 55	4 019238 798340	43,95
Wire - 3/180 TPI							E25
0150424	58-559	26 x 2.30	Wire	720	26 – 55	4 019238 026207	26,95
0150425	58-584	27.5 x 2.30	Wire	770	26 – 55	4 019238 026191	26,95
0150427	58-622	29 x 2.30	Wire	795	26 – 55	4 019238 026177	26,95

*min. – max.

PURE GRIP COMPOUND · SHIELD WALL SYSTEM · TR · E25

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

Cross King

TECHNOLOGY

SIZES SHIELDWALL

SIZES WIRE



TECHNOLOGY

SIZES SHIELDWALL

SIZES WIRE

THE ALL-ROUNDER

Versatile competition and trail tire, sure footed in turns and comfortable. Good grip and available with various technologies. Smoothly rolling tire that adapts to any terrain with its special tread.

PURE GRIP COMPOUND

PureGrip Compound is derived from an activated Silica compound and is a good example of how we integrate customer feedback continuously into our research and development. This mixture technology fits in perfectly alongside the BlackChili Compound. The name PureGrip does exactly what it says; exceptionally good grip and durability are the distinguishing features of this compound. Engineered with PureGrip in our Performance products in our road and mountain bike ranges.

SHIELD WALL SYSTEM

The **ShieldWall System** combines the optimum combination of high puncture protection and the low rolling resistance with low weight. This is made possible by an additional, all-round puncture protection layer, which consists of a finely woven cross fabric. This gives the tire a high resistance to punctures and damage. Despite its additional ply, the tire has a very good damping property and a high degree of flexibility to adapt perfectly to the ground. The revolutionary tubeless ready bead allows easy and uncomplicated mounting of the tire. For best results in sealing and in use, we recommend the use of the new Continental RevoSealant sealant.

TECHNOLOGY

SIZES SHIELDWALL

SIZES WIRE

Cross King

PureGrip Compound - ShieldWall System - 3/180 TPI **E25** **TR**

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0150310	50-559	26 x 2.00	● foldable	600	26 – 65	4 019238 797459	43,95
0150303	55-559	26 x 2.20	● foldable	675	26 – 58	4 019238 797480	43,95
0150302	58-559	26 x 2.30	● foldable	720	26 – 55	4 019238 798319	43,95
0150308	50-584	27.5 x 2.00	● foldable	670	26 – 65	4 019238 797466	43,95
0150291	55-584	27.5 x 2.20	● foldable	740	26 – 58	4 019238 797503	43,95
0150290	58-584	27.5 x 2.30	● foldable	775	26 – 55	4 019238 798296	43,95
0150337	65-584	27.5 x 2.60	● foldable	920	20 – 43	4 019238 003581	48,95
0150336	70-584	27.5 x 2.80	● foldable	1045	17 – 40	4 019238 003611	48,95
0150306	50-622	29 x 2.00	● foldable	710	26 – 65	4 019238 797473	43,95
0150295	55-622	29 x 2.20	● foldable	750	26 – 58	4 019238 797497	43,95
0150297	58-622	29 x 2.30	● foldable	805	26 – 55	4 019238 798326	43,95
0150502	65-622	29 x 2.60	● foldable	995	20 – 43	4 019238 037258	48,95

min. – max.

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

Cross King

TECHNOLOGY

SIZES SHIELDWALL

SIZES WIRE

Cross King

Wire - 3/180 TPI — E25

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0101687	50-406	20 x 2.00	Wire	460	31 – 65	4 019238 026344	17,95
0101688	50-507	24 x 2.00	Wire	565	31 – 65	4 019238 026337	24,95
0150399	50-559	26 x 2.00	Wire	610	26 – 65	4 019238 024968	26,95
0150404	55-559	26 x 2.20	Wire	675	26 – 58	4 019238 024999	26,95
0150407	58-559	26 x 2.30	Wire	720	26 – 55	4 019238 025019	26,95
0150402	50-584	27.5 x 2.00	Wire	680	31 – 65	4 019238 024975	26,95
0150405	55-584	27.5 x 2.20	Wire	740	26 – 58	4 019238 025002	26,95
0150408	58-584	27.5 x 2.30	Wire	775	26 – 55	4 019238 025033	26,95
0150403	50-622	29 x 2.00	Wire	725	26 – 65	4 019238 024982	26,95
0150406	55-622	29 x 2.20	Wire	750	26 – 58	4 019238 025026	26,95
0150410	58-622	29 x 2.30	Wire	795	26 – 55	4 019238 025057	26,95

**min. – max.*

E25

Race King

TECHNOLOGY

SIZES SHIELDWALL

SIZES WIRE



TECHNOLOGY

SIZES SHIELDWALL

SIZES WIRE

FIRST CHOICE FOR RACERS

Classic competition tire which feels at home at the Cross Country World Cup or at marathons. Low rolling resistance, good self-damping and low weight make it the right choice for all race bikes.

PURE GRIP COMPOUND

PureGrip Compound is derived from an activated Silica compound and is a good example of how we integrate customer feedback continuously into our research and development. This mixture technology fits in perfectly alongside the BlackChili Compound. The name PureGrip does exactly what it says; exceptionally good grip and durability are the distinguishing features of this compound. Engineered with PureGrip in our Performance products in our road and mountain bike ranges.

SHIELD WALL SYSTEM

The **ShieldWall System** combines the optimum combination of high puncture protection and the low rolling resistance with low weight. This is made possible by an additional, all-round puncture protection layer, which consists of a finely woven cross fabric. This gives the tire a high resistance to punctures and damage. Despite its additional ply, the tire has a very good damping property and a high degree of flexibility to adapt perfectly to the ground. The revolutionary tubeless ready bead allows easy and uncomplicated mounting of the tire. For best results in sealing and in use, we recommend the use of the new Continental RevoSealant sealant.

TECHNOLOGY

SIZES SHIELDWALL

SIZES WIRE

Race King

PureGrip Compound - ShieldWall System - 3/180 TPI **E25** **TR**

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0150311	50-559	26 x 2.00	● foldable	555	26 – 65	4 019238 797510	43,95
0150304	55-559	26 x 2.20	● foldable	645	26 – 58	4 019238 797541	43,95
0150309	50-584	27.5 x 2.00	● foldable	625	26 – 65	4 019238 797527	43,95
0150292	55-584	27.5 x 2.20	● foldable	685	26 – 58	4 019238 797565	43,95
0150307	50-622	29 x 2.00	● foldable	665	26 – 65	4 019238 797534	43,95
0150296	55-622	29 x 2.20	● foldable	730	26 – 58	4 019238 797558	43,95

min. – max.

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

Race King

TECHNOLOGY

SIZES SHIELDWALL

SIZES WIRE

Race King

Wire - 3/180 TPI — E25

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0150429	50-559	26 x 2.00	Wire	565	26 – 65	4 019238 026153	26,95
0150432	55-559	26 x 2.20	Wire	655	26 – 58	4 019238 026122	26,95
0150445	50-584	27.5 x 2.00	Wire Refl.	645	26 – 65	4 019238 026221	31,95
0150430	50-584	27.5 x 2.00	Wire	640	26 – 65	4 019238 026146	26,95
0150525	55-584	27.5 x 2.20	Wire Refl.	695	26 – 58	4 019238 048377	31,95
0150433	55-584	27.5 x 2.20	Wire	690	26 – 58	4 019238 026115	26,95
0150446	50-622	29 x 2.00	Wire Refl.	685	26 – 65	4 019238 026214	31,95
0150431	50-622	29 x 2.00	Wire	680	26 – 65	4 019238 026139	26,95
0150527	55-622	29 x 2.20	Wire Refl.	740	26 – 58	4 019238 048391	31,95
0150435	55-622	29 x 2.20	Wire	730	26 – 58	4 019238 026092	26,95

**min. – max.*

Ruban

eRuban Plus

TECHNOLOGY

SIZES RUBAN SHIELDWALL

SIZES RUBAN WIRE

SIZES eRUBAN



TECHNOLOGY
SIZES RUBAN SHIELDWALL
SIZES RUBAN WIRE
SIZES eRUBAN

FROM RURAL TO URBAN

The energy-saving SUV allrounder that gets you to both Rural and Urban.
The partner for your commute, running errands and the weekend tour.

PURE GRIP COMPOUND

PureGrip Compound is derived from an activated Silica compound and is a good example of how we integrate customer feedback continuously into our research and development. This mixture technology fits in perfectly alongside the BlackChili Compound. The name PureGrip does exactly what it says; exceptionally good grip and durability are the distinguishing features of this compound. Engineered with PureGrip in our Performance products in our road and mountain bike ranges.

PolyX Breaker™

With **PolyX Breaker™** car expertise comes to the bicycle tire sector. Polyester has been used successfully for years in car tires and has proved extremely effective. The extremely resistant polyester fibre is woven tightly crosswise. A very high fabric density is achieved which makes the breaker resistant not only to foreign bodies, but especially to punctures. The rolling resistance is not affected by this breaker.

SHIELD WALL SYSTEM

The **ShieldWall System** combines the optimum combination of high puncture protection and the low rolling resistance with low weight. This is made possible by an additional, all-round puncture protection layer, which consists of a finely woven cross fabric. This gives the tire a high resistance to punctures and damage. Despite its additional ply, the tire has a very good damping property and a high degree of flexibility to adapt perfectly to the ground. The revolutionary tubeless ready bead allows easy and uncomplicated mounting of the tire. For best results in sealing and in use, we recommend the use of the new Continental RevoSealant sealant.

TECHNOLOGY

SIZES RUBAN SHIELDWALL

SIZES RUBAN WIRE

SIZES eRUBAN

Ruban

PureGrip Compound - ShieldWall System - 3/180 TPI **E25** **TR**

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0150574	54-584	27.5 x 2.10	● foldable	655	26 – 58	4 019238 056358	43,95
0150575	58-584	27.5 x 2.30	● foldable	800	26 – 55	4 019238 056280	43,95
0150576	65-584	27.5 x 2.60	● foldable	870	20 – 43	4 019238 056297	48,95
0150577	54-622	29 x 2.10	● foldable	695	26 – 58	4 019238 056303	43,95
0150578	58-622	29 x 2.30	● foldable	845	26 – 55	4 019238 056310	43,95
0150579	65-622	29 x 2.60	● foldable	925	20 – 43	4 019238 056327	48,95

min. – max.

PURE GRIP COMPOUND · SHIELD WALL SYSTEM · TR · E25

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

Specifically designed for the use on electrified bikes

E25

TECHNOLOGY

SIZES RUBAN SHIELDWALL

SIZES RUBAN WIRE

SIZES eRUBAN

Ruban

Wire - 3/180 TPI — E25

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0150534	54-584	27.5 x 2.10	Wire	660	26 – 58	4 019238 048568	29,95
0150535	54-584	27.5 x 2.10	Wire refl.	665	26 – 58	4 019238 048551	34,95
0150536	58-584	27.5 x 2.30	Wire	780	26 – 55	4 019238 048582	29,95
0150537	58-584	27.5 x 2.30	Wire refl.	805	26 – 55	4 019238 048575	34,95
0150538	65-584	27.5 x 2.60	Wire	870	20 – 43	4 019238 048605	34,95
0150539	65-584	27.5 x 2.60	Wire refl.	875	20 – 43	4 019238 048599	41,95
0150540	54-622	29 x 2.10	Wire	700	26 – 58	4 019238 048629	29,95
0150541	54-622	29 x 2.10	Wire refl.	710	26 – 58	4 019238 048612	34,95
0150545	58-622	29 x 2.30	Wire	845	26 – 55	4 019238 048643	29,95
0150546	58-622	29 x 2.30	Wire refl.	855	26 – 55	4 019238 048636	34,95
0150547	65-622	29 x 2.60	Wire	920	20 – 43	4 019238 048667	34,95
0150548	65-622	29 x 2.60	Wire refl.	930	20 – 43	4 019238 048650	41,95

min. – max.

Specifically designed for the use on electrified bikes

E25

TECHNOLOGY

SIZES RUBAN SHIELDWALL

SIZES RUBAN WIRE

SIZES eRUBAN

eRuban Plus

PureGrip Compound - PolyX Breaker™ - Wire - 3/180 TPI — E50

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0150723	62-406	20 x 2.4	Wire	630	26 – 58	4 019238 097962	38,95
0150722	62-406	20 x 2.4	Wire refl.	635	26 – 58	4 019238 097979	43,95
0150550	58-559	26 x 2.30	Wire	800	26 – 55	4 019238 048919	40,95
0150555	58-559	26 x 2.30	Wire refl.	810	26 – 55	4 019238 048865	45,95
0150549	58-584	27.5 x 2.30	Wire	845	26 – 55	4 019238 048926	40,95
0150556	58-584	27.5 x 2.30	Wire refl.	850	26 – 55	4 019238 048858	45,95
0150551	65-584	27.5 x 2.60	Wire	920	20 – 43	4 019238 048902	45,95
0150557	65-584	27.5 x 2.60	Wire refl.	930	20 – 43	4 019238 048841	50,95
0150552	54-622	29 x 2.10	Wire	740	26 – 58	4 019238 048896	40,95
0150558	54-622	29 x 2.10	Wire refl.	750	26 – 58	4 019238 048834	45,95
0150553	58-622	29 x 2.30	Wire	890	26 – 55	4 019238 048889	40,95
0150559	58-622	29 x 2.30	Wire refl.	900	26 – 55	4 019238 048827	45,95
0150560	65-622	29 x 2.60	Wire	985	20 – 43	4 019238 048872	50,95
0150554	65-622	29 x 2.60	Wire refl.	980	26 – 43	4 019238 048810	45,95

*min. – max.

PURE GRIP COMPOUND · PolyX Breaker™ · E50

Specifically designed for the use on electrified bikes

E50

Speed King

TECHNOLOGY

SIZES



TECHNOLOGY

SIZES

THE TIRE FOR DIRT JUMPERS AND PUMP TRACKS

The Speed King features a meticulously crafted tread pattern that delivers grip and control on dirt tracks and ramps. With RaceSport construction, it offers the perfect balance of strength, durability, and weight, so you can land every trick and hit every corner with confidence. Whether you're launching off a jump or speeding down a slope, the Speed King reigns supreme.

With our unique tread compound, we have revolutionized the sport of cycling. With the legendary **BlackChili Compound** we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.

Developed together with professional mountain bikers, the **RaceSport** carcass unites light-weight construction with noticeably improved puncture protection for the perfect competition choice. Light: contains a particularly fine, flexible nylon fabric with an elaborately produced protective rubber coating. Fast and reliable: World Cup quality, low rolling resistance and puncture protection. Combined with our legendary BlackChili Compound, the right combination for XC and Marathon racing.

Speed King

TECHNOLOGY

SIZES

Speed King

BlackChili Compound - RaceSport - 3/180 TPI

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0100728	55-559	26 x 2.20	● foldable	405	26 – 65	4 019238 586282	62,95

min. – max.

Double Fighter III

TECHNOLOGY

SIZES



AN URBAN ADVENTURER WITH REAL VERSATILITY

Light rolling and quiet on tarmac, yet grips on tracks and gravel roads.

TECHNOLOGY

SIZES


Double Fighter III

Wire - 3/180 TPI


Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0101232	47-305	16 x 1.75	Wire	380	34 – 65	4 019238 709810	17,95
0101282	47-305	16 x 1.75	Wire refl.	380	34 – 65	4 019238 732429	20,95
0101233	47-406	20 x 1.75	Wire	520	34 – 65	4 019238 709827	17,95
0101283	47-406	20 x 1.75	Wire refl.	520	34 – 65	4 019238 732412	20,95
0101234	47-507	24 x 1.75	Wire	620	34 – 65	4 019238 709834	20,95
0101284	47-507	24 x 1.75	Wire refl.	620	34 – 65	4 019238 732405	25,95
0101251	50-507	24 x 2.0	Wire	650	31 – 65	4 019238 721126	20,95
0101285	50-507	24 x 2.0	Wire refl.	650	31 – 65	4 019238 732399	25,95
0101235	50-559	26 x 1.90	Wire	790	26 – 65	4 019238 709858	26,95
0101286	50-559	26 x 1.90	Wire refl.	790	26 – 65	4 019238 732382	29,95
0101237	50-584	27.5 x 2.00	Wire	860	26 – 65	4 019238 709872	26,95
0101287	50-584	27.5 x 2.00	Wire refl.	860	26 – 65	4 019238 732375	29,95
0100795	37-622	700 x 35C	Wire	550	37 – 87	4 019238 601671	26,95
0101289	37-622	700 x 35C	Wire refl.	550	37 – 87	4 019238 732436	29,95
0101239	50-622	29 x 2.00	Wire	915	26 – 65	4 019238 709896	26,95
0101292	50-622	29 x 2.00	Wire refl.	915	26 – 65	4 019238 732368	29,95

**min. – max.*


GRAVEL

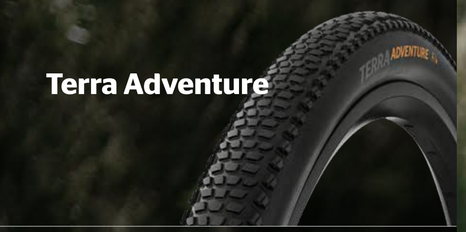


Terra Adventure

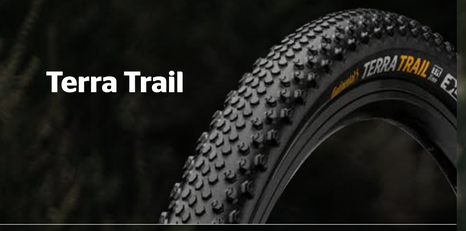

Terra Trail

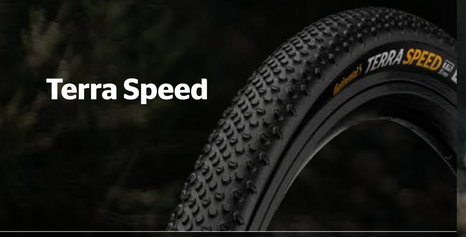

Terra Speed

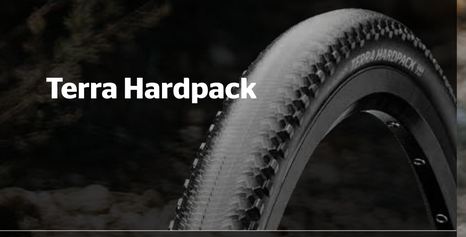

Terra Hardpack



Terra Competition

Terra Adventure

TECHNOLOGY

SIZES



TECHNOLOGY

SIZES

ENGINEERED FOR THE UNKOWN

Your gateway to the uncharted. Optimized for diverse terrains, it excels from soft to hardpack. With widths up to 55 mm Terra Adventure merges Gravel and MTB performance seamlessly. Embrace the freedom of the outdoors with a tire designed for the adventurer in you.

TERRAIN

Mixed Loose Mud

CASING

Trail: A light and durable single-ply carcass construction, ideal for Trail use cases.

COMPOUND

Grip: Designed for modern Cross-Country, Down-Country, Trail and gravel use cases. This compound offers an excellent balance of grip and rolling resistance and is the number one choice for all-round balanced characteristics.

Terra Adventure

TECHNOLOGY

SIZES

Terra Adventure

Trail Grip - 3/330 TPI

E25 TR

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0150748	45-622	28 X 1.75	foldable	535	29 – 65	4 019238 401639	64,95
0150749	45-622	28 X 1.75	foldable	530	29 – 65	4 019238 401615	64,95
0150750	50-622	28 X 2.00	foldable	615	26 – 58	4 019238 401592	64,95
0150753	50-622	28 X 2.00	foldable	625	26 – 58	4 019238 401578	64,95
0150754	55-622	29 X 2.20	foldable	750	26 – 50	4 019238 401554	64,95
0150755	55-622	29 X 2.20	foldable	735	26 – 50	4 019238 401530	64,95

min. – max.

TK E25

STREET	■										
OFFROAD / BIKEPACKING	■	■	■	■	■	■	■	■	■		

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.

Terra Trail

TECHNOLOGY

SIZES PROTECTION

SIZES SHIELDWALL



TECHNOLOGY

SIZES PROTECTION

SIZES SHIELDWALL

CHOOSE ALTER ROAD, CHOOSE TERRA

For your way off-road. For more comfort. For the adventure.
Be it the long tour, or the shortcut on your way home. Made to get you over rough and smooth.

BLACK CHILI COMPOUND

With our unique tread compound, we have revolutionized the sport of cycling. With the legendary **BlackChili Compound** we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.

PROTECTION TECHNOLOGY

The extra all-round puncture protection layer renders the casings extremely durable and resistant to damage or penetration from foreign elements. Treads and sidewalls are equally protected, and are 25% lighter and offer 30% more puncture protection than their predecessors protected by DuraSkin®. Rolling resistance and absorption has also significantly improved. The new Revolution Tubeless Ready Bead improves the installation of Tubeless Ready Tires. For tubeless sealing we recommend the use of Continental RevoSealant.

PURE GRIP COMPOUND

PureGrip Compound is derived from an activated Silica compound and is a good example of how we integrate customer feedback continuously into our research and development. This mixture technology fits in perfectly alongside the BlackChili Compound. The name PureGrip does exactly what it says; exceptionally good grip and durability are the distinguishing features of this compound. Engineered with PureGrip in our Performance products in our road and mountain bike ranges.

SHIELD WALL SYSTEM

The **ShieldWall System** combines the optimum combination of high puncture protection and the low rolling resistance with low weight. This is made possible by an additional, all-round puncture protection layer, which consists of a finely woven cross fabric. This gives the tire a high resistance to punctures and damage. Despite its additional ply, the tire has a very good damping property and a high degree of flexibility to adapt perfectly to the ground. The revolutionary tubeless ready bead allows easy and uncomplicated mounting of the tire. For best results in sealing and in use, we recommend the use of the new Continental RevoSealant sealant.

Terra Trail

TECHNOLOGY

SIZES PROTECTION

SIZES SHIELDWALL

Terra Trail

BlackChili Compound - ProTection - 3/180 TPI **E25** **TR**

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0101715	40-584	650 X 40B	foldable	415	34 – 72	4 019238 029673	69,95
0101716	40-584	650 X 40B	foldable	410	34 – 72	4 019238 029659	69,95
0101944	40-584	650 X 40B	foldable	430	34 – 72	4 019238 064544	69,95
0101697	40-622	700 X 40C	foldable	435	34 – 72	4 019238 027075	69,95
0101701	40-622	700 X 40C	foldable	435	34 – 72	4 019238 027044	69,95
0101836	40-622	700 X 40C	foldable	445	34 – 72	4 019238 052060	69,95

*min. – max.

BLACKCHILI COMPOUND · PROTECTION TECHNOLOGY · TR · E25

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.

STREET

OFFROAD / BIKEPACKING

Terra Trail

TECHNOLOGY

SIZES PROTECTION

SIZES SHIELDWALL

Terra Trail

PureGrip Compound - ShieldWall System - 3/180 TPI **E25** **TR**

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0150509	47-584	650 X 47B	foldable	490	29 – 65	4 019238 038507	43,95
0150508	47-584	650 X 47B	foldable	500	29 – 65	4 019238 038538	43,95
0150503	35-622	700 X 35C	foldable	395	37 – 72	4 019238 038460	43,95
0150505	35-622	700 X 35C	foldable	420	37 – 72	4 019238 038491	43,95
0150507	40-622	700 X 40C	foldable	460	34 – 72	4 019238 038545	43,95
0150673	40-622	700 X 40C	foldable	455	34 – 72	4 019238 064506	43,95
0150675	45-622	700 X 45C	foldable	505	29 – 65	4 019238 064476	43,95
0150674	45-622	700 X 45C	foldable	530	29 – 65	4 019238 064483	43,95

min. – max.

PURE GRIP COMPOUND · SHIELD WALL SYSTEM · TR · E25

STREET

OFFROAD / BIKEPACKING

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.

Terra Speed

TECHNOLOGY

SIZES



CHOOSE ALTER ROAD, CHOOSE TERRA

For your way off-road. For more comfort. For the adventure.
Be it the long tour, or the shortcut on your way home. Made to get you over rough and smooth.

TECHNOLOGY

SIZES

BLACK CHILI COMPOUND

With our unique tread compound, we have revolutionized the sport of cycling. With the legendary **BlackChili Compound** we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.

PROTECTION TECHNOLOGY

The extra all-round puncture protection layer renders the casings extremely durable and resistant to damage or penetration from foreign elements. Treads and sidewalls are equally protected, and are 25% lighter and offer 30% more puncture protection than their predecessors protected by DuraSkin®. Rolling resistance and absorption has also significantly improved. The new Revolution Tubeless Ready Bead improves the installation of Tubeless Ready Tires. For tubeless sealing we recommend the use of Continental RevoSealant.

Terra Speed

TECHNOLOGY

SIZES

Terra Speed

BlackChili Compound - ProTection - 3/180 TPI **E25** **TR**

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0101719	35-584	650 X 35B	foldable	390	34 – 72	4 019238 029796	69,95
0101720	35-584	650 X 35B	foldable	390	34 – 72	4 019238 029772	69,95
0101717	40-584	650 X 40B	foldable	430	34 – 72	4 019238 029635	69,95
0101718	40-584	650 X 40B	foldable	430	34 – 72	4 019238 029611	69,95
0101693	35-622	700 X 35C	foldable	415	37 – 72	4 019238 027013	69,95
0101700	35-622	700 X 35C	foldable	405	34 – 72	4 019238 026955	69,95
0101694	40-622	700 X 40C	foldable	445	34 – 72	4 019238 027099	69,95
0101702	40-622	700 X 40C	foldable	445	34 – 72	4 019238 027020	69,95
0101837	40-622	700 X 40C	foldable	460	37 – 72	4 019238 052053	69,95
0102016	45-622	700 X 45C	foldable	515	29 – 65	4 019238 093094	69,95
0102007	45-622	700 X 45C	foldable	515	29 – 65	4 019238 083439	69,95

min. – max.

BLACK CHILI COMPOUND · PROTECTION TECHNOLOGY · TR · E25

STREET											
OFFROAD / BIKEPACKING											

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.

Terra Hardpack

TECHNOLOGY

SIZES



CHOOSE ALTER ROAD, CHOOSE TERRA

For your way off-road. For more comfort. For the adventure.
Be it the long tour, or the shortcut on your way home. Made to get you over rough and smooth.

TECHNOLOGY

SIZES

PURE GRIP COMPOUND

PureGrip Compound is derived from an activated Silica compound and is a good example of how we integrate customer feedback continuously into our research and development. This mixture technology fits in perfectly alongside the BlackChili Compound. The name PureGrip does exactly what it says; exceptionally good grip and durability are the distinguishing features of this compound. Engineered with PureGrip in our Performance products in our road and mountain bike ranges.

SHIELD WALL SYSTEM

The **ShieldWall System** combines the optimum combination of high puncture protection and the low rolling resistance with low weight. This is made possible by an additional, all-round puncture protection layer, which consists of a finely woven cross fabric. This gives the tire a high resistance to punctures and damage. Despite its additional ply, the tire has a very good damping property and a high degree of flexibility to adapt perfectly to the ground. The revolutionary tubeless ready bead allows easy and uncomplicated mounting of the tire. For best results in sealing and in use, we recommend the use of the new Continental RevoSealant sealant.

Terra Hardpack

TECHNOLOGY

SIZES

Terra Hardpack

PureGrip Compound - ShieldWall System - 3/180 TPI **E25** **TR**

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0150563	50-584	650 X 50B	● foldable	540	26 – 65	4 019238 052114	43,95
0150565	50-622	700 X 50C	● foldable	575	26 – 65	4 019238 052107	43,95

min. – max.

PURE GRIP COMPOUND · SHIELD WALL SYSTEM · TR · E25

STREET	■	■	■	■	■	■	■	■	■	■
OFFROAD / BIKEPACKING	■	■	■	■	■	■	■	■	■	■

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.

Terra Competition

TECHNOLOGY

SIZES



BLUR THE LINE BETWEEN ROAD AND GRAVEL

Built for multi-surface speed, Terra Competition redefines gravel performance. Engineered for all-road riding, it features improved aerodynamics, reduced weight, and lower rolling resistance – delivering faster climbs, sharper acceleration, and energy savings at every yaw angle.

TECHNOLOGY

SIZES

TERRAIN

Hardpack

CASING

Trail: A light and durable single-ply carcass construction, ideal for Trail use cases.

Race: Light and supple one-ply construction. Fabrics and body compounds combined for superb plushness and suppleness.

COMPOUND

Grip: Designed for modern Cross-Country, Down-Country, Trail and gravel use cases. This compound offers an excellent balance of grip and rolling resistance and is the number one choice for all-round balanced characteristics.

Rapid: When speed and acceleration on flat and inclines is all that matters, then the Rapid Compound is your go-to option. Inspired by the characteristics of compounds used in our road, race and gravel tires. For riders who do not want to compromise in speed.

Terra Competition

TECHNOLOGY

SIZES

Terra Competition

Race Rapid - 3/330 TPI							E25	TR
Article	**ETRTO**	**Dimension**	**Color/sidewall**	**g**	**PSI max.**	**EAN**		**RRP/€**
0102025	35-622	28 X 1.40	foldable	345	79	4 019238 401509		74,95
0102026	40-622	28 X 1.55	foldable	420	72	4 019238 401486		74,95
0102027	45-622	28 X 1.75	foldable	470	65	4 019238 401462		76,95
Trail Grip - 3/330 TPI							**E25**	**TR**
0150756	35-622	28 X 1.40	foldable	410	79	4 019238 401752		68,95
0150757	35-622	28 X 1.40	foldable	410	79	4 019238 401738		68,95
0150758	40-622	28 X 1.55	foldable	470	72	4 019238 401714		68,95
0150759	40-622	28 X 1.55	foldable	475	72	4 019238 401691		68,95
0150760	45-622	28 X 1.75	foldable	525	65	4 019238 401677		70,95
0150761	45-622	28 X 1.75	foldable	530	65	4 019238 401653		70,95

TR E25

STREET

OFFROAD / BIKEPACKING

CONTI KNOWLEDGE

Tubeless Ready:

For initial mounting we recommend to use at least 30 ml of Conti RevoSealant per tire. Then spin the tire (wheel) to spread the Conti RevoSealant inside of the tire and pump to the allowed maximum pressure. Check the pressure before the next ride and adjust to your desired PSI.

This tire is Hookless compatible to its limited max. pressure. Please check wheel instruction and tire packaging for detailed information.

Pure CONTACT
eCONTACT Plus
CONTACT Plus
CONTACT Plus City
CONTACT
CONTACT Urban
CONTACT Speed
CONTACT Spike
Top CONTACT Winter II
Grand Prix Urban
Urban Taraxagum
RIDE City
RIDE Tour



URBAN

Pure CONTACT

TECHNOLOGY

SIZES

FEATURES

SUSTAINABILITY



PURE CONTACT. BUILT TOUGH TO RIDE SMOOTH.

Created for urban riders who want reliable protection for commuting, shopping, and exploring. Pure CONTACT combines Vectran and PolyX breaker technologies for strong puncture protection. It also uses selected alternative material inputs, including silicate from rice husk ash, natural rubber sourced in line with Continental's Sustainable Natural Rubber Policy, and a renewable softener.

Vectran™ BREAKER

Vectran is spun from liquid crystal-polymer. This way a thermoplastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker. Without effecting rolling resistance.

PolyX Breaker™

With **PolyX Breaker™** car expertise comes to the bicycle tire sector. Polyester has been used successfully for years in car tires and has proved extremely effective. The extremely resistant polyester fibre is woven tightly crosswise. A very high fabric density is achieved which makes the breaker resistant not only to foreign bodies, but especially to punctures. The rolling resistance is not affected by this breaker.

E-50

Suitable for E-Bikes: For our E-Bike tire we fall back on over 100 years' experience with moped and motorcycle tires. All of our city/trekking tires are rated to a standard speed of at least 25 km/h. Those tires marked E50 are also certified for S-Pedelecs. With their high quality structure, puncture protection is high and the rolling resistance is low offering protection from premature wear brought about by the additional driving force.

Pure CONTACT

Vectran Breaker - PolyX Breaker - 3/180 TPI | GRX | E50 | 8

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	kg+	EAN	RRP/€
0101949	47-622	28 x 1.75	foldable refl.	665	29 – 72	115	4019238065022	64,95
0101967	50-584	27.5 x 2.00	foldable refl.	665	26 – 65	125	4019238072419	64,95
0101968	55-584	27.5 x 2.20	foldable refl.	770	26 – 58	125	4019238072426	64,95
0101969	60-584	27.5 x 2.40	foldable refl.	845	23 – 50	121	4019238072433	64,95
0101970	40-622	28 x 1.50	foldable refl.	585	34 – 72	115	4019238072402	64,95
0101971	50-622	28 x 2.00	foldable refl.	730	26 – 65	128	4019238072488	64,95
0101972	55-622	28 x 2.20	foldable refl.	800	26 – 58	132	4019238072495	64,95
0101982	50-584	27.5 x 2.00	foldable refl.	615	26 – 65	125	4019238074017	66,95
0101983	55-584	27.5 x 2.20	foldable refl.	715	26 – 58	125	4019238074000	66,95
0101984	60-584	27.5 x 2.40	foldable refl.	795	23 – 50	121	4019238073997	66,95
0101985	40-622	28 x 1.50	foldable refl.	545	34 – 72	115	4019238073980	66,95
0101986	47-622	28 x 1.75	foldable refl.	625	29 – 72	115	4019238073973	66,95
0101987	50-622	28 x 2.00	foldable refl.	685	26 – 65	128	4019238073966	66,95
0101988	55-622	28 x 2.20	foldable refl.	745	26 – 58	132	4019238073959	66,95

min. – max.

Vectran™ BREAKER | PolyX Breaker™ | E50

SAFETY LEVEL	1	2	3	4	5	6	7	8

8

Puncture Protection Level 8:

Vectran Breaker, our high-quality racing tire technology, meets PolyX Breaker technology, which has proven to be extremely effective in car tires for years. The combination provides the **best puncture protection** in our Range.

Specifically designed for the use on electrified bikes

E50

Pure CONTACT

TECHNOLOGY
SIZES
FEATURES
SUSTAINABILITY



Safety Level 8

Battery saving lightweight + rolling resistance

Outstanding grip (wet and dry)

Higher visibility with Graphite Reflex*

* Does not meet the certification standard ECE-R88. Does not support reflective properties as per StVZO (Germany).

Pure CONTACT contains selected alternative material inputs, including silica variants derived from the ashes of rice husks, natural rubber sourced under our Sustainable Natural Rubber Policy, and a renewable softener. These inputs currently account for approximately one third of the tire material composition, based on our internal calculation method.





Silica variants derived from the ashes of rice husks



Selected additives with recycled feedstock



Rapeseed Oil



Natural sourced rubber*

* in line with Continental's Sustainable Natural Rubber Policy

eCONTACT Plus

TECHNOLOGY

SIZES

FEATURES



TECHNOLOGY
SIZES
FEATURES

THE ULTIMATE IN CONFIDENCE AND COMFORT

Specifically developed for the commuting and load-carrying demands of e-bikes. This high-mileage tire features a compact tread pattern to keep rolling resistance low, boosting the range of each battery charge.

Safety + Pro

Engineered for the unique demands of modern e-bikes and cargo bikes up to 50km/h. Our **SafetyPlus Pro Breaker** technology combines highly flexible rubber with the proven strength of our tightly woven PolyX puncture-resistant fibers. The high elasticity keeps rolling resistance low, prolonging the e-bike battery life so you get moremiles from each charge. When riding with heavy loads, the SafetyPlus Pro Breaker contributes to confident handling through busy traffic and sharp corners, no matter the conditions.

E-50

Suitable for E-Bikes: For our E-Bike tire we fall back on over 100 years' experience with moped and motorcycle tires. All of our city/trekking tires are rated to a standard speed of at least 25 km/h. Those tires marked E50 are also certified for S-Pedelecs. With their high quality structure, puncture protection is high and the rolling resistance is low offering protection from premature wear brought about by the additional driving force.

eCONTACT Plus

SafetyPlus Pro Breaker - 3/180 TPI - E50 7

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	kg+	EAN	RRP/€
0101973	50-406	20 x 2.00	Wire refl.	745	31 – 72	85	4 019238 073171	57,95
0101974	55-406	20 x 2.20	Wire refl.	770	29 – 72	95	4 019238 073164	57,95
0101975	62-406	20 x 2.50	Wire refl.	835	26 – 58	115	4 019238 073157	57,95
0101976	55-559	26 x 2.20	Wire refl.	1100	26 – 65	128	4 019238 073140	57,95
0101977	55-584	27.5 x 2.20	Wire refl.	1195	26 – 65	128	4 019238 073133	57,95
0101978	62-584	27.5 x 2.50	Wire refl.	1220	23 – 58	128	4 019238 073126	57,95
0101979	50-622	28 x 2.00	Wire refl.	1095	26 – 72	121	4 019238 073119	57,95
0101980	55-622	28 x 2.20	Wire refl.	1150	26 – 65	128	4 019238 073102	57,95

min. – max.

Safety + Pro E50

SAFETY LEVEL | 1 | 2 | 3 | 4 | 5 | 6 | 7

Specifically designed for the use on electrified bikes

E50

eCONTACT Plus

TECHNOLOGY

SIZES

FEATURES



Loads up to 128 kg

Superior Puncture Protection

High mileage

High visibility

CONTACT Plus

TECHNOLOGY

SIZES



ALL YOU WOULD EXPECT

An allrounder on any type of roads and paths that enhances every bike. Thanks to the plus in puncture protection, nobody will be left behind with a flat tire. ECE-R75-certified, designated for usage on e-bikes up to 50 km/h.

TECHNOLOGY

SIZES

Safety +

Specially designed for e-bikes up to 50 km/h, we have combined our **SafetySystem Breaker** with a highly flexible natural rubber. The result is an extremely cut and puncture resistant breaker ply which has a low rolling resistance thanks to its high elasticity. This helps saving battery life and the environment. High acceleration torques and fast speeds in turns are easily absorbed by the breaker. The specialist for fast e-bikes and rental bikes.

E-50

Suitable for E-Bikes: For our E-Bike tire we fall back on over 100 years' experience with moped and motorcycle tires. All of our city/trekking tires are rated to a standard speed of at least 25 km/h. Those tires marked E50 are also certified for S-Pedelecs. With their high quality structure, puncture protection is high and the rolling resistance is low offering protection from premature wear brought about by the additional driving force.

TECHNOLOGY

SIZES

CONTACT Plus

SafetyPlus Breaker - 3/180 TPI - E50 7

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	kg+	EAN	RRP/€
0101001	47-507	24 x 1.75	Wire refl.	940	29 - 58	90	4 019238 639971	52,95
0101002	47-559	26 x 1.75	Wire refl.	1040	29 - 58	109	4 019238 639964	52,95
0101221	42-584	27.5 x 1½	Wire refl.	990	34 - 65	100	4 019238 698138	52,95
0101003	28-622	28 x 1⅝ x 1⅛	Wire refl.	645	52 - 101	85	4 019238 639957	52,95
0101004	32-622	28 x 1⅜ x 1⅝	Wire refl.	750	43 - 87	90	4 019238 639940	52,95
0101005	37-622	28 x 1¼ x 1¾	Wire refl.	980	43 - 87	100	4 019238 639933	52,95
0101816	40-622	28 x 1.50	Wire refl.	1025	34 - 94	100	4 019238 043396	52,95
0101006	42-622	28 x 1.60	Wire refl.	1050	34 - 72	100	4 019238 639926	52,95
0101007	47-622	28 x 1.75	Wire refl.	1150	29 - 58	95	4 019238 639988	52,95
0101008	42-635	28 x 1½	Wire refl.	1070	34 - 65	100	4 019238 639995	52,95

min. - max.

Safety E50

SAFETY LEVEL 1 2 3 4 5 6 7

CONTACT Plus City

TECHNOLOGY

SIZES



TECHNOLOGY

SIZES

OUT AND ABOUT IN TOWN

Exactly the right tire to explore the city securely and relaxed thanks to a tread pattern made for tarmac, efficient rolling characteristics, and a maximum of puncture protection. With its ECE-R75-certification, cyclists can ride economically and save energy even on e-bikes up to 50 km/h.

Safety+

Specially designed for e-bikes up to 50 km/h, we have combined our **SafetySystem Breaker** with a highly flexible natural rubber. The result is an extremely cut and puncture resistant breaker ply which has a low rolling resistance thanks to its high elasticity. This helps saving battery life and the environment. High acceleration torques and fast speeds in turns are easily absorbed by the breaker. The specialist for fast e-bikes and rental bikes.

E-50

Suitable for E-Bikes: For our E-Bike tire we fall back on over 100 years' experience with moped and motorcycle tires. All of our city/trekking tires are rated to a standard speed of at least 25 km/h. Those tires marked E50 are also certified for S-Pedelecs. With their high quality structure, puncture protection is high and the rolling resistance is low offering protection from premature wear brought about by the additional driving force.

CONTACT Plus City

TECHNOLOGY

SIZES

CONTACT Plus City

SafetyPlus Breaker - 3/180 TPI - E50 | 7

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	kg+	EAN	RRP/€
0101331	47-559	26 x 1.75	Wire refl.	1000	29 – 58	109	4 019238 760934	52,95
0101334	55-559	26 x 2.20	Wire refl.	1230	26 – 58	121	4 019238 760996	52,95
0101335	55-584	27.5 x 2.20	Wire refl.	1270	26 – 58	128	4 019238 761009	52,95
0101336	37-622	28 x 1⅜ x 1⅝	Wire refl.	900	43 – 87	95	4 019238 760873	52,95
0101340	42-622	28 x 1.60	Wire refl.	990	34 – 72	100	4 019238 760903	52,95
0101343	47-622	28 x 1.75	Wire refl.	1130	29 – 58	95	4 019238 760965	52,95

*min. – max.

Safety+ E50

SAFETY LEVEL | 1 | 2 | 3 | 4 | 5 | 6 | 7

CONTACT

TECHNOLOGY

SIZES



TECHNOLOGY
SIZES

WHEN THINGS GET TOUGH

Versatile allrounder which connects reliably to every surface. Equipped with the most popular tread pattern from the urban/tour range, especially designed for a high degree of safety thanks to its lamellar structure.

Safety System

The **SafetySystem Breaker** consists of a Kevlar-reinforced, high-strength nylon fabric. Puncture and cut resistant, whilst also being light and flexible, allowing the tire to adapt more effectively to the terrain. The breaker protects the carcass against foreign objects and contributes to a longer lifespan of the tire without significantly increasing weight or rolling resistance. Additionally, tires with SafetySystem have particularly comfortable handling characteristics.

E-25

Suitable for E-Bikes: For our E-Bike tire we fall back on over 100 years' experience with moped and motorcycle tires. All of our city/trekking tires are rated to a standard speed of at least 25 km/h. Those tires marked E50 are also certified for S-Pedelecs. With their high quality structure, puncture protection is high and the rolling resistance is low offering protection from premature wear brought about by the additional driving force.

TECHNOLOGY

SIZES

CONTACT

SafetySystem Breaker - 3/180 TPI - E25 4

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0101310	37-406	20 x 1.40	Wire.	420	46 – 72	4 019238 760286	21,95
0101311	37-406	20 x 1.40	Wire refl.	420	46 – 72	4 019238 760279	23,95
0101312	47-406	20 x 1.75	Wire	505	29 – 58	4 019238 761283	21,95
0101313	47-406	20 x 1.75	Wire refl.	505	29 – 58	4 019238 761276	23,95
0101314	47-559	26 x 1.75	Wire	670	29 – 58	4 019238 761306	36,95
0101315	47-559	26 x 1.75	Wire refl.	670	29 – 58	4 019238 761290	40,95
0101316	28-622	28 x 1⅝ x 1⅛	Wire	480	52 – 101	4 019238 761375	35,95
0101317	28-622	28 x 1⅝ x 1⅛	Wire refl.	480	52 – 101	4 019238 761368	39,95
0101318	32-622	28 x 1¼ x 1¾	Wire	495	43 – 87	4 019238 761320	35,95
0101319	32-622	28 x 1¼ x 1¾	Wire refl.	495	43 – 87	4 019238 761313	39,95
0101321	37-622	28 x 1⅜ x 1⅝	Wire	610	37 – 87	4 019238 761344	35,95
0101320	37-622	28 x 1⅜ x 1⅝	Wire refl.	610	37 – 87	4 019238 761351	39,95
0101325	42-622	28 x 1.60	Wire	645	34 – 87	4 019238 761382	35,95
0101324	42-622	28 x 1.60	Wire refl.	645	34 – 87	4 019238 761399	39,95
0101327	47-622	28 x 1.75	Wire	770	29 – 58	4 019238 761429	36,95
0101328	47-622	28 x 1.75	Wire refl.	770	29 – 58	4 019238 761412	40,95

**min. – max.*

Safety System E25

SAFETY LEVEL	1	2	3	4	5	6	7

CONTACT Urban

TECHNOLOGY

SIZES
35-349 – 62-584

SIZES
28-622 – 62-622



CYCLING ON THE CITY PULSE

Premium mobility for design enthusiasts. Urban tread pattern packed with the latest technology. The perfect symbiosis between light-rolling and puncture protection reflected in this specialized tire designed for the city jungle.

TECHNOLOGY

SIZES
35-349 – 62-584

SIZES
28-622 – 62-622

PURE GRIP COMPOUND

PureGrip Compound is derived from an activated Silica compound and is a good example of how we integrate customer feedback continuously into our research and development. This mixture technology fits in perfectly alongside the BlackChili Compound. The name PureGrip does exactly what it says; exceptionally good grip and durability are the distinguishing features of this compound. Engineered with PureGrip in our Performance products in our road and mountain bike ranges.

Safety Pro

The **SafetyPro Breaker** is designed from nylon textile. Cross-woven textile fiber netting that is simultaneously robust and flexible. Maximum puncture protection with minimal added weight. The risk of punctures resulting from glass or sharp stones is substantially reduced.

E-50

Suitable for E-Bikes: For our E-Bike tire we fall back on over 100 years' experience with moped and motorcycle tires. All of our city/trekking tires are rated to a standard speed of at least 25 km/h. Those tires marked E50 are also certified for S-Pedelecs. With their high quality structure, puncture protection is high and the rolling resistance is low offering protection from premature wear brought about by the additional driving force.

TECHNOLOGY

SIZES
35-349 – 62-584

SIZES
28-622 – 62-622

CONTACT Urban

PureGrip Compound - SafetyPro - 3/180 TPI **E50** **6**

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	kg+	EAN	RRP/€
0150681	35-349	16 x 1.35	foldable refl.	225	46 – 116	71	4 019238 065886	53,95
0150567	35-349	16 x 1.35	Wire refl.	265	46 – 116	71	4 019238 052749	43,95
0150648	35-349	16 x 1.35	foldable	220	46 – 116	71	4 019238 063882	48,95
0150649	35-349	16 x 1.35	foldable	220	46 – 116	71	4 019238 063875	48,95
0150365	32-406	20 x 1.25	Wire refl.	295	52 – 101	71	4 019238 023152	37,95
0150352	42-406	20 x 1.60	Wire refl.	360	40 – 87	75	4 019238 021868	37,95
0150354	50-406	20 x 2.00	Wire refl.	430	31 – 72	80	4 019238 021912	38,95
0150366	47-559	26 x 1.75	Wire refl.	565	29 – 72	112	4 019238 023145	38,95
0150355	50-559	26 x 2.00	Wire refl.	585	26 – 72	121	4 019238 021929	38,95
0150367	55-559	26 x 2.20	Wire refl.	665	26 – 65	132	4 019238 023138	38,95
0150353	42-584	27.5 x 1.60	Wire refl.	515	34 – 94	106	4 019238 021936	37,95
0150357	50-584	27.5 x 2.00	Wire refl.	620	26 – 72	121	4 019238 021943	38,95
0150368	55-584	27.5 x 2.20	Wire refl.	695	26 – 65	132	4 019238 023121	38,95
0150658	62-584	27.5 x 2.50	Wire refl.	750	23 – 58	132	4 019238 063912	38,95

*min. – max.

PURE GRIP COMPOUND · Safety Pro · E50

SAFETY LEVEL	1	2	3	4	5	6	7

TECHNOLOGY

SIZES
35-349 – 62-584

SIZES
28-622 – 62-622

CONTACT Urban

PureGrip Compound - SafetyPro - 3/180 TPI **E50** **6**

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	kg+	EAN	RRP/€
0150369	28-622	28 x 1⅝ x 1⅛	Wire refl.	400	52 – 108	85	4 019238 023114	37,95
0150370	32-622	28 x 1¼ x 1¾	Wire refl.	450	43 – 94	90	4 019238 023107	37,95
0150371	35-622	28 x 1⅜ x 1⅝	Wire refl.	470	37 – 94	95	4 019238 023091	37,95
0150350	37-622	28 x 1⅜ x 1⅝	Wire refl.	490	37 – 94	100	4 019238 021875	37,95
0150351	40-622	28 x 1.50	Wire refl.	545	34 - 94	100	4 019238 021882	37,95
0150349	42-622	28 x 1.60	Wire refl.	545	34 – 87	106	4 019238 021899	37,95
0150372	47-622	28 x 1.75	Wire refl.	625	29 – 72	115	4 019238 023084	38,95
0150358	50-622	28 x 2.00	Wire refl.	655	26 – 72	121	4 019238 021950	38,95
0150373	55-622	28 x 2.20	Wire refl.	740	26 – 72	132	4 019238 023077	38,95
0150656	62-622	28 x 2.50	Wire refl.	795	23 – 58	132	4 019238 063936	38,95

*min. – max.

PURE GRIP COMPOUND · Safety Pro · E50

SAFETY LEVEL	1	2	3	4	5	6	7

CONTACT Speed

TECHNOLOGY

SIZES WIRE

SIZES WIRE REFLEX



TECHNOLOGY
SIZES WIRE
SIZES WIRE REFLEX

UNITES SPEED AND COMFORT IN ONE TIRE

The perfect choice for the city speedsters, single-speed bikes and fitness bikes. With its double layer of fabric breaker, the light-weight design and its roughened slick tread it shines especially on tarmac.

Safety System

The **SafetySystem Breaker** consists of a Kevlar-reinforced, high-strength nylon fabric. Puncture and cut resistant, whilst also being light and flexible, allowing the tire to adapt more effectively to the terrain. The breaker protects the carcass against foreign objects and contributes to a longer lifespan of the tire without significantly increasing weight or rolling resistance. Additionally, tires with SafetySystem have particularly comfortable handling characteristics.

E-25

Suitable for E-Bikes: For our E-Bike tire we fall back on over 100 years' experience with moped and motorcycle tires. All of our city/trekking tires are rated to a standard speed of at least 25 km/h. Those tires marked E50 are also certified for S-Pedelecs. With their high quality structure, puncture protection is high and the rolling resistance is low offering protection from premature wear brought about by the additional driving force.

TECHNOLOGY

SIZES WIRE

SIZES WIRE REFLEX

CONTACT Speed

SafetySystem Breaker - 3/180 TPI - E25 4

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0101387	28-406	20 x 1.10	Wire	265	63 – 87	4 019238 774665	24,95
0101389	32-559	26 x 1.30	Wire	430	43 – 87	4 019238 774658	35,95
0101393	42-559	26 x 1.60	Wire	540	34 – 87	4 019238 774641	35,95
0101395	50-559	26 x 2.00	Wire	665	26 – 58	4 019238 774634	36,95
0101397	32-584	27.5 x 1.25	Wire	470	43 – 87	4 019238 774535	35,95
0101401	50-584	27.5 x 2.00	Wire	700	26 – 65	4 019238 774627	36,95
0101402	28-622	28 x 1⅝ x 1⅛	Wire	425	52 – 101	4 019238 774610	35,95
0101406	32-622	28 x 1¼ x 1¾	Wire	485	43 – 87	4 019238 774597	35,95
0101412	37-622	28 x 1⅜ x 1⅝	Wire	500	37 – 87	4 019238 774559	35,95
0101416	42-622	28 x 1.60	Wire	590	34 – 87	4 019238 774504	35,95

min. – max.

Safety System E25

SAFETY LEVEL | 1 | 2 | 3 | 4 | 5 | 6 | 7

TECHNOLOGY

SIZES WIRE

SIZES WIRE REFLEX

CONTACT Speed

SafetySystem Breaker - 3/180 TPI - E25 4

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0101388	28-406	20 x 1.10	Wire refl.	265	63 – 87	4 019238 774481	29,95
0101391	32-559	26 x 1.30	Wire refl.	430	43 – 87	4 019238 774474	39,95
0101392	42-559	26 x 1.60	Wire refl.	540	34 – 87	4 019238 774467	39,95
0101396	50-559	26 x 2.00	Wire refl.	665	26 – 58	4 019238 774450	40,95
0101399	50-584	27.5 x 2.00	Wire refl.	700	26 – 65	4 019238 774443	40,95
0101403	28-622	28 x 1⅝ x 1⅛	Wire refl.	425	52 – 101	4 019238 774436	39,95
0101408	32-622	28 x 1¼ x 1¾	Wire refl.	485	43 – 87	4 019238 774429	39,95
0101414	37-622	28 x 1⅜ x 1⅝	Wire refl.	500	37 – 87	4 019238 774405	39,95
0101418	42-622	28 x 1.60	Wire refl.	590	34 – 87	4 019238 774382	39,95

min. – max.

Safety System E25

SAFETY LEVEL	1	2	3	4	5	6	7

CONTACT Spike 120 and 240

TECHNOLOGY

SIZES



OUR RECOMMENDATION FOR SNOW AND ICE

Safety during cold and dark seasons: The spikes guarantee traction, the reflective stripes ensure visibility. Maintain full control of your bicycle even in turns and hard stops. Choose between 120 or 240 spikes.

TECHNOLOGY

SIZES

Safety System

The **SafetySystem Breaker** consists of a Kevlar-reinforced, high-strength nylon fabric. Puncture and cut resistant, whilst also being light and flexible, allowing the tire to adapt more effectively to the terrain. The breaker protects the carcass against foreign objects and contributes to a longer lifespan of the tire without significantly increasing weight or rolling resistance. Additionally, tires with SafetySystem have particularly comfortable handling characteristics.

E-25

Suitable for E-Bikes: For our E-Bike tire we fall back on over 100 years' experience with moped and motorcycle tires. All of our city/trekking tires are rated to a standard speed of at least 25 km/h. Those tires marked E50 are also certified for S-Pedelecs. With their high quality structure, puncture protection is high and the rolling resistance is low offering protection from premature wear brought about by the additional driving force.

CONTACT Spike 120 and 240

TECHNOLOGY

SIZES

CONTACT Spike 120

SafetySystem Breaker - 3/180 TPI - E25 4

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0150498	32-622	28 x 1¼ x 1¾	Wire refl.	635	43 – 94	4 019238 034868	48,95
0150269	37-622	28 x 1⅜ x 1⅝	Wire refl.	710	37 – 72	4 019238 779622	48,95
0150268	42-622	28 x 1.60	Wire refl.	865	34 – 87	4 019238 779639	48,95

*min. – max.

Safety System E25

CONTACT Spike 240

SafetySystem Breaker - 3/180 TPI - E25 4

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0150091	37-622	28 x 1⅜ x 1⅝	Wire refl.	710	37 – 72	4 019238 610345	62,95
0150191	42-622	28 x 1.60	Wire refl.	865	34 – 87	4 019238 682267	62,95

*min. – max.

Safety System E25

SAFETY LEVEL	1	2	3	4	5	6	7

Top CONTACT Winter II Prem.

TECHNOLOGY

SIZES



THE PREMIUM WINTER TIRE

The Top CONTACT Winter II Premium benefits from our know-how as leading manufacturer of winter tires for cars and trucks and offers full control on slippery, snowy roads and surfaces thanks to its grippy lamellar tread pattern.

TECHNOLOGY

SIZES

Vectran™ BREAKER

Vectran is spun from liquid crystal-polymer. This way a thermo-plastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker. Without effecting rolling resistance.

E-50

Suitable for E-Bikes: For our E-Bike tire we fall back on over 100 years' experience with moped and motorcycle tires. All of our city/trekking tires are rated to a standard speed of at least 25 km/h. Those tires marked E50 are also certified for S-Pedelecs. With their high quality structure, puncture protection is high and the rolling resistance is low offering protection from premature wear brought about by the additional driving force.

TECHNOLOGY

SIZES

Top CONTACT Winter II Premium

Vectran Breaker - 3/180 TPI - E50 | 6

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	kg+	EAN	RRP/€
0100712	50-559	26 x 1.90	● foldable refl.	585	26 – 58	121	4 019238 586275	73,95
0101734	55-559	26 x 2.20	● foldable refl.	710	26 – 58	128	4 019238 031836	73,95
0101281	50-584	27.5 x 2.00	● foldable refl.	585	26 – 65	121	4 019238 733297	73,95
0100713	37-622	28 x 1⅜ x 1⅝	● foldable refl.	670	37 – 87	95	4 019238 586268	73,95
0100714	42-622	28 x 1.60	● foldable refl.	655	34 – 87	100	4 019238 586251	73,95

min. – max.

Vectran™ BREAKER E50

SAFETY LEVEL | 1 | 2 | 3 | 4 | 5 | 6 | 7

Grand Prix Urban

TECHNOLOGY

SIZES



THE STATEMENT TIRE FOR THE CITY

Combines a modern tread pattern design with the latest technology. Built with a tuned race construction while damping for comfort – a matching mix for the urban ride. Its black reflective stripe* blends perfectly with the sidewall.

TECHNOLOGY

SIZES

BLACK CHILI COMPOUND

With our unique tread compound, we have revolutionized the sport of cycling. With the legendary **BlackChili Compound** we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.

PolyX Breaker™

With **PolyX Breaker™** car expertise comes to the bicycle tire sector. Polyester has been used successfully for years in car tires and has proved extremely effective. The extremely resistant polyester fibre is woven tightly crosswise. A very high fabric density is achieved which makes the breaker resistant not only to foreign bodies, but especially to punctures. The rolling resistance is not affected by this breaker.

** Does not meet the certification standard ECE-R88. Does not support reflective properties as per StVZO (Germany).*

Grand Prix Urban

TECHNOLOGY

SIZES

Grand Prix Urban

BlackChili Compound - PolyX Breaker - 3/180 TPI

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0101575	35-622	28 x 1⅜ x 15/8	foldable	320	37 – 87	4 019238 002447	56,95
0101673	35-622	28 x 1⅜ x 15/8	foldable	320	37 – 87	4 019238 022940	56,95

min. – max.

BLACK CHILI COMPOUND

PolyX Breaker™

Developed together with schindelhauer

Urban Taraxagum

TECHNOLOGY

SIZES



reddot winner 2020
innovative product

THE URBAN TARAXAGUM IS...

...Continental's first serial bicycle tire using dandelions as part of the rubber material, produced in Europe with shorter supply routes compared with Continental's conventional natural rubber sourcing.

TECHNOLOGY

SIZES

Vectran™ BREAKER

Vectran is spun from liquid crystal-polymer. This way a thermo-plastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker. Without effecting rolling resistance.

TARAXAGUM

The Urban Taraxagum by Continental is the first serial bicycle tire made from dandelion rubber, for which we established the brand mark **Taraxagum™.** The project is part of Continental's research and development activities focused on alternative raw materials and regional supply chains. Shorter distances between cultivation areas and European tire production can help reduce logistical effort compared with longer conventional supply routes, where supported by route and sourcing data.

Urban Taraxagum

TECHNOLOGY

SIZES

Urban Taraxagum

Taraxagum - Vectran Breaker - 3/180 TPI

Article	ETRTO	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0101675	35-622	28 x 1⅜ x 1⅝	● foldable	350	37 – 87	4 019238 023046	75,95

**min. – max.*

Vectran™ BREAKER

TARAXAGUM

RIDE City

TECHNOLOGY

SIZES



A ROBUST TIRE WITH A MODERN LOOK

High reliability and always on time in urban traffic: Solid tire for city bikes. Proven successful on tarmac as well as on gravel thanks to good traction provided by its broad contact area in the tread pattern.

TECHNOLOGY

SIZES

EXTRA Puncture BELT

Anyone looking for a reliable everyday companion will go for a tire with **EXTRA PunctureBelt.** This rugged rubber breaker, combined with the rubber-reinforced sidewalls of the tire, ensures a high level of puncture protection and sidewall abrasion. Where durability is the main focus, there is also a solid tire version.

E-25

Suitable for E-Bikes: For our E-Bike tire we fall back on over 100 years' experience with moped and motorcycle tires. All of our city/trekking tires are rated to a standard speed of at least 25 km/h. Those tires marked E50 are also certified for S-Pedelecs. With their high quality structure, puncture protection is high and the rolling resistance is low offering protection from premature wear brought about by the additional driving force.

TECHNOLOGY

SIZES

RIDE City

ExtraPuncture Belt - 3/180 TPI

E25 | 5

Article	ETRTO	Dimension	Col./side	g	PSI*	EAN	RRP/€
0101552	47-559	26 x 1.75	Wire refl.	940	29 - 58	4 019238 810431	29,95
0101652	47-559	26 x 1.75	Wire refl.	960	29 - 58	4 019238 012514	29,95
0101651	47-559	26 x 1.75	Wire refl.	930	29 - 58	4 019238 012521	29,95
0101553	32-622	28 x 1¼ x 1¾	Wire refl.	700	43 - 79	4 019238 810424	29,95
0101554	37-622	28 x 1⅜ x 1⅝	Wire refl.	850	37 - 65	4 019238 810417	29,95
0101603	37-622	28 x 1⅜ x 1⅝	Wire refl.	850	37 - 65	4 019238 005349	29,95
0101604	37-622	28 x 1⅜ x 1⅝	Wire refl.	850	37 - 65	4 019238 005356	29,95
0101650	37-622	28 x 1⅜ x 1⅝	Wire refl.	820	37 - 65	4 019238 012507	29,95
0101649	37-622	28 x 1⅜ x 1⅝	Wire refl.	820	37 - 65	4 019238 012538	29,95
0101555	42-622	28 x 1.60	Wire refl.	950	34 - 65	4 019238 810400	29,95
0101605	42-622	28 x 1.60	Wire refl.	950	34 - 65	4 019238 005363	29,95

Article	ETRTO	Dimension	Col./side	g	PSI*	EAN	RRP/€
0101657	42-622	28 x 1.60	Wire refl.	950	34 - 65	4 019238 017106	29,95
0101648	42-622	28 x 1.60	Wire refl.	950	34 - 65	4 019238 012545	29,95
0101647	42-622	28 x 1.60	Wire refl.	950	34 - 65	4 019238 012552	29,95
0101556	47-622	28 x 1.75	Wire refl.	1100	29 - 58	4 019238 810394	29,95
0101607	47-622	28 x 1.75	Wire refl.	1100	29 - 58	4 019238 005387	29,95
0101679	47-622	28 x 1.75	Wire refl.	1100	29 - 58	4 019238 023244	29,95
0101658	47-622	28 x 1.75	Wire refl.	1160	29 - 58	4 019238 017090	29,95
0101608	47-622	28 x 1.75	Wire refl.	1100	29 - 58	4 019238 005394	29,95
0101646	47-622	28 x 1.75	Wire refl.	1050	29 - 58	4 019238 012569	29,95
0101645	47-622	28 x 1.75	Wire refl.	1050	29 - 58	4 019238 012576	29,95

*min. - max.

EXTRA Puncture BELT E25

SAFETY LEVEL	1	2	3	4	5	6	7

RIDE Tour

TECHNOLOGY

SIZES WIRE

SIZES WIRE REFLEX



TECHNOLOGY
SIZES WIRE
SIZES WIRE REFLEX

A LOYAL COMPANION ON YOUR REGULAR RIDES

Tarmac, gravel, urban environment - the right tire for your daily ride thanks to robust puncture protection and an additional rubber layer for high milage. Available in a large range of colors and sizes.

EXTRA Puncture BELT

Anyone looking for a reliable everyday companion will go for a tire with **EXTRA PunctureBelt.** This rugged rubber breaker, combined with the rubber-reinforced sidewalls of the tire, ensures a high level of puncture protection and sidewall abrasion. Where durability is the main focus, there is also a solid tire version.

E-25

Suitable for E-Bikes: For our E-Bike tire we fall back on over 100 years' experience with moped and motorcycle tires. All of our city/trekking tires are rated to a standard speed of at least 25 km/h. Those tires marked E50 are also certified for S-Pedelecs. With their high quality structure, puncture protection is high and the rolling resistance is low offering protection from premature wear brought about by the additional driving force.

TECHNOLOGY

SIZES WIRE

SIZES WIRE REFLEX

RIDE Tour

ExtraPuncture Belt - 3/180 TPI

E25 | 5

Article	ETRTO	Dimension	Col./side	g	PSI*	EAN	RRP/€
0101137	62-203	12½ x 2¼	Wire	405	26 - 58	4 019238 693645	18,95
0101138	47-305	16 x 1.75	Wire	490	29 - 58	4 019238 693638	18,95
0101140	47-406	20 x 1.75	Wire	600	29 - 58	4 019238 693614	20,95
0101184	47-406	20 x 1.75	Wire	630	29 - 58	4 019238 694741	20,95
0101143	47-507	24 x 1.75	Wire	720	29 - 58	4 019238 693591	19,95
0101186	47-507	24 x 1.75	Wire	810	29 - 58	4 019238 694758	19,95
0101148	47-559	26 x 1.75	Wire	780	29 - 58	4 019238 693553	27,95
0101181	47-559	26 x 1.75	Wire	870	29 - 58	4 019238 694680	27,95
0101189	47-559	26 x 1.75	Wire	870	29 - 58	4 019238 694765	29,95
0101187	37-584	26/27.5 x 1⅜	Wire	690	37 - 72	4 019238 694727	27,95
0101146	42-584	26/27.5 x 1½	Wire	720	34 - 65	4 019238 693577	27,95
0101150	54-584	26/27.5 x 1½ x 2	Wire	950	29 - 58	4 019238 693539	27,95
0101433	37-609	27 x 1⅜ x 1½	Wire	685	37 - 72	4 019238 781823	27,95
0101151	28-622	28 x 1⅝ x 1⅛	Wire	540	52 - 101	4 019238 693522	27,95
0101153	32-622	28 x 1¼ x 1¾	Wire	640	43 - 79	4 019238 693508	27,95
0101188	32-622	28 x 1¼ x 1¾	Wire	600	43 - 79	4 019238 694703	27,95
0101155	37-622	28 x 1⅜ x 1⅝	Wire	690	37 - 72	4 019238 693485	27,95
0101180	37-622	28 x 1⅜ x 1⅝	Wire	725	37 - 72	4 019238 694673	27,95
0101193	37-622	28 x 1⅜ x 1⅝	Wire	725	37 - 72	4 019238 694734	27,95
0101177	37-622	28 x 1⅜ x 1⅝	Wire	725	37 - 72	4 019238 694581	27,95
0101157	42-622	28 x 1.60	Wire	790	34 - 65	4 019238 693478	27,95
0101159	47-622	28 x 1.75	Wire	900	29 - 58	4 019238 693461	27,95
0101179	47-622	28 x 1.75	Wire	960	29 - 58	4 019238 694697	27,95
0101194	47-622	28 x 1.75	Wire	960	29 - 58	4 019238 694772	27,95
0101185	47-622	28 x 1.75	Wire	960	29 - 58	4 019238 694642	27,95
0101161	32-630	27 x 1¼	Wire	660	43 - 79	4 019238 693447	27,95
0101183	32-630	27 x 1¼	Wire	610	43 - 79	4 019238 694710	27,95
0101164	37-635	28 x 1⅜	Wire	710	37 - 72	4 019238 693416	29,95
0101165	42-635	28 x 1½	Wire	820	34 - 65	4 019238 693409	27,95

*min. - max.

EXTRA Puncture BELT E25

SAFETY LEVEL	1	2	3	4	5	6	7

TECHNOLOGY

SIZES WIRE

SIZES WIRE REFLEX

RIDE Tour

ExtraPuncture Belt - 3/180 TPI


E25 | 5

Article	ETRTO	Dimension	Col./side	g	PSI*	EAN	RRP/€
0101139	47-305	16 x 1.75	Wire refl.	490	29 - 58	4 019238 693621	19,95
0101142	47-406	20 x 1.75	Wire refl.	600	29 - 58	4 019238 693607	21,95
0101144	47-507	24 x 1.75	Wire refl.	720	29 - 58	4 019238 693584	21,95
0101149	47-559	26 x 1.75	Wire refl.	780	29 - 58	4 019238 693546	29,95
0101175	47-559	26 x 1.75	Wire refl.	870	29 - 58	4 019238 694628	29,95
0101147	42-584	26/27.5 x 1½	Wire refl.	720	34 - 65	4 019238 693560	29,95
0101168	54-584	26/27.5 x 1½ x 2	Wire refl.	720	26 - 58	4 019238 693379	29,95
0101152	28-622	28 x 1⅝ x 1⅛	Wire refl.	540	52 - 101	4 019238 693515	29,95
0101154	32-622	28 x 1¼ x 1¾	Wire refl.	640	43 - 79	4 019238 693492	29,95
0101156	37-622	28 x 1⅜ x 1⅝	Wire refl.	690	37 - 72	4 019238 692549	29,95
0101182	37-622	28 x 1⅜ x 1⅝	Wire refl.	725	37 - 72	4 019238 694598	29,95
0101167	42-622	28 x 1.60	Wire refl.	790	34 - 65	4 019238 693386	29,95
0101176	42-622	28 x 1.60	Wire refl.	790	34 - 65	4 019238 694611	29,95
0101160	47-622	28 x 1.75	Wire refl.	900	29 - 58	4 019238 693454	29,95
0101162	32-630	27 x 1¼	Wire refl.	660	43 - 79	4 019238 693430	29,95
0101164	37-635	28 x 1⅜	Wire refl.	710	37 - 72	4 019238 693416	29,95
0101166	42-635	28 x 1½	Wire refl.	820	34 - 65	4 019238 693393	29,95

*min. - max.

EXTRA Puncture BELT E25

SAFETY LEVEL | 1 | 2 | 3 | 4 | 5 | 6 | 7

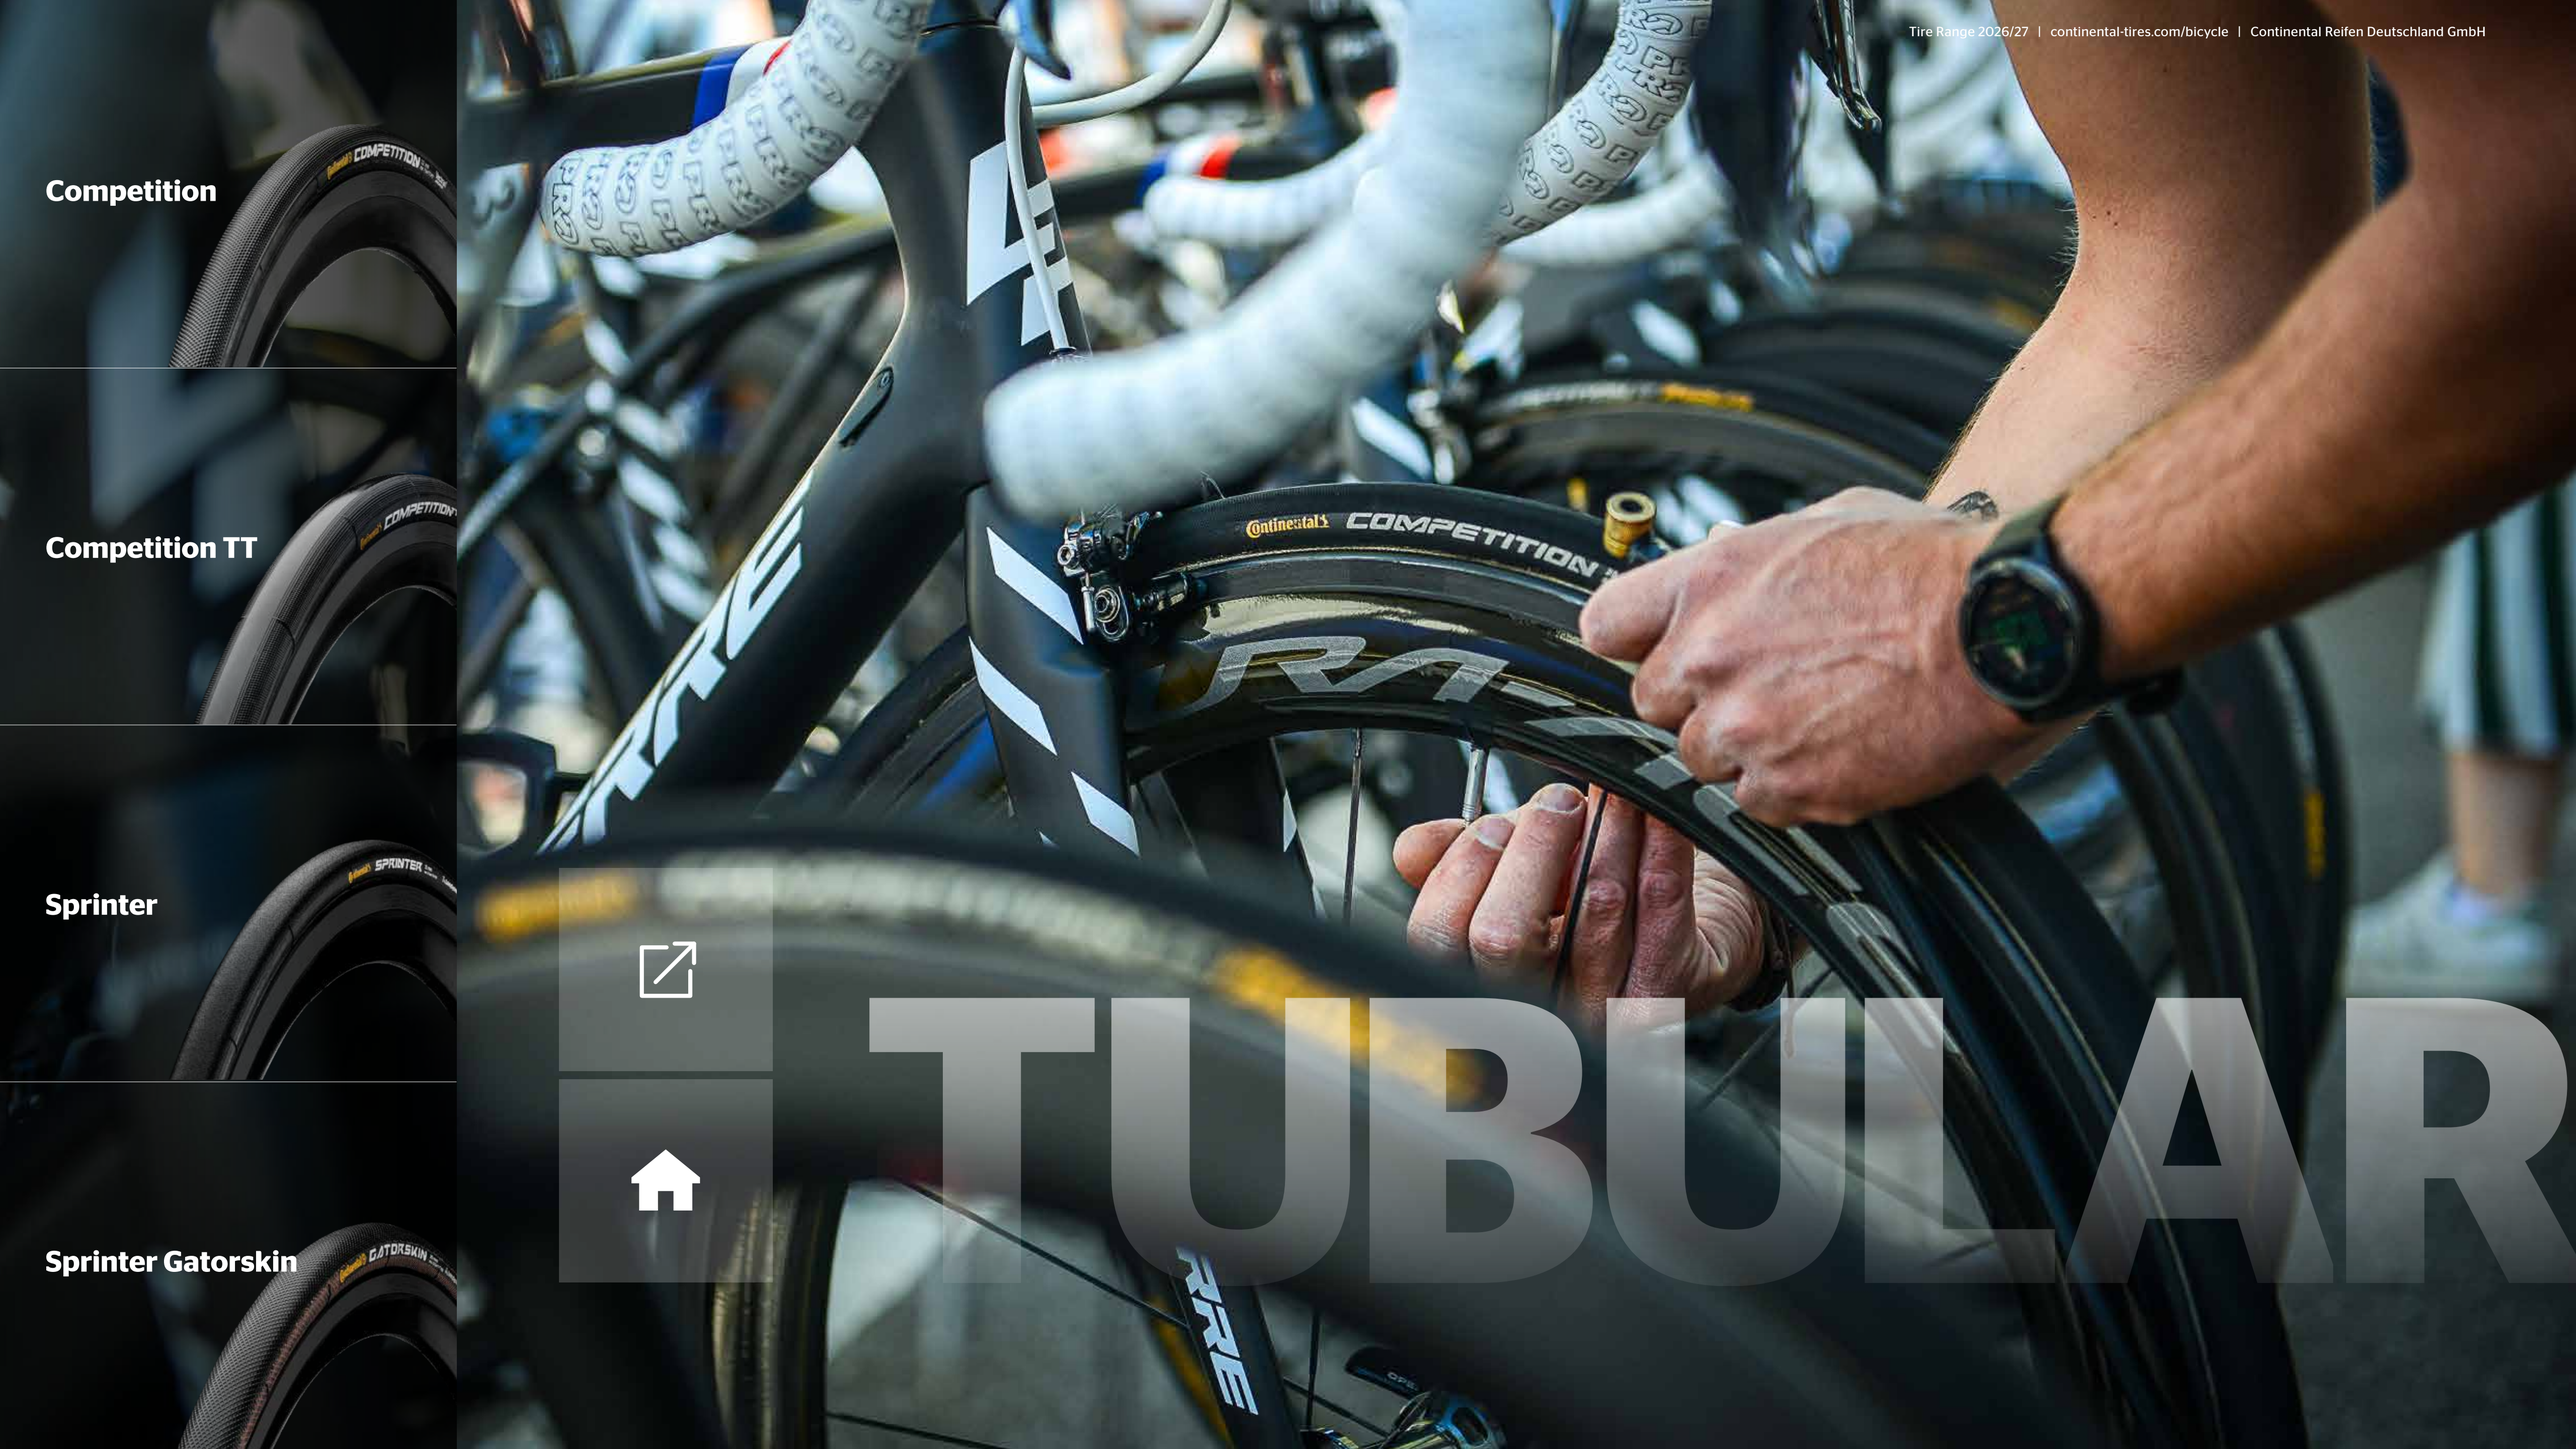
Competition
Competition TT
Sprinter
Sprinter Gatorskin
TUBULAR

Competition

TECHNOLOGY

SIZES



TECHNOLOGY

SIZES

IT'S TIME TO RACE: THE CLASSIC FOR STRONG ACCELERATION

Robust all-rounder appearing at the sharp end in all the major cycling races around the world. Agile and fast, adapts to the competition in all road conditions.

BLACK CHILI COMPOUND

With our unique tread compound, we have revolutionized the sport of cycling. With the legendary **BlackChili Compound** we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.

Vectran™ BREAKER

Vectran is spun from liquid crystal-polymer. This way a thermoplastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker. Without effecting rolling resistance.

Competition

TECHNOLOGY

SIZES

Competition

BlackChili Compound - Vectran Breaker - 3/180 TPI

Article	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0196138	28 x 22	● Tubular	265	174	4 019238 334760	128,95
0196189	28 x 25	● Tubular	280	174	4 019238 549126	128,95

*max.

BLACK CHILI COMPOUND

Vectran™ BREAKER

Competition TT

TECHNOLOGY

SIZES



TECHNOLOGY
SIZES

EVEN FASTER

Even faster time trial tire due to the delicate carcass.
Excellent acceleration thanks to the application of a latex tube.
Design updated to a smooth central tread pattern.
! Please consider the special attributes of latex tubes.

BLACK CHILI COMPOUND

With our unique tread compound, we have revolutionized the sport of cycling. With the legendary **BlackChili Compound** we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.

Vectran™ BREAKER

Vectran is spun from liquid crystal-polymer. This way a thermoplastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker. Without effecting rolling resistance.

Competition TT

TECHNOLOGY

SIZES

Competition TT

BlackChili Compound - Vectran Breaker - 3/180 TPI

Article	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0196270	28 x 25	● Tubular	205	174	4 019238 043884	128,95

*max.

BLACK CHILI COMPOUND

Vectran™ BREAKER

Sprinter

TECHNOLOGY

SIZES



FAST SPRINTER, FOR WINNING THE POINTS

Efficient tires for criteriums or triathlon where the tires winning characteristics will shine through. Neutral slick profile for a direct feel with the road. Full speed ahead!

TECHNOLOGY

SIZES

BLACK CHILI COMPOUND

With our unique tread compound, we have revolutionized the sport of cycling. With the legendary **BlackChili Compound** we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.

Safety System

The **SafetySystem Breaker** consists of a Kevlar-reinforced, high-strength nylon fabric. Puncture and cut resistant, whilst also being light and flexible, allowing the tire to adapt more effectively to the terrain. The breaker protects the carcass against foreign objects and contributes to a longer lifespan of the tire without significantly increasing weight or rolling resistance. Additionally, tires with SafetySystem have particularly comfortable handling characteristics.

Sprinter

TECHNOLOGY

SIZES

Sprinter

BlackChili Compound - SafetySystem Breaker - 3/180 TPI

Article	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0196150	26 x 22	● Tubular	255	174	4 019238 341034	73,95
0196135	28 x 22	● Tubular	275	174	4 019238 334715	73,95
0196244	28 x 25	● Tubular	290	174	4 019238 674576	73,95

*max.

BLACKCHILI COMPOUND

Safety System

Sprinter Gatorskin

TECHNOLOGY

SIZES



THE ROBUST SPRINTER, CREATED FOR EXTENDED RIDES AND TRAINING

The roads of Flanders, Roubaix and San Remo are home to this tough tubular. Durable and puncture protected carcass, ready for hundreds of kilometres, even on bad roads.

TECHNOLOGY

SIZES

BLACK CHILI COMPOUND

With our unique tread compound, we have revolutionized the sport of cycling. With the legendary **BlackChili Compound** we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.

Safety System

The **SafetySystem Breaker** consists of a Kevlar-reinforced, high-strength nylon fabric. Puncture and cut resistant, whilst also being light and flexible, allowing the tire to adapt more effectively to the terrain. The breaker protects the carcass against foreign objects and contributes to a longer lifespan of the tire without significantly increasing weight or rolling resistance. Additionally, tires with SafetySystem have particularly comfortable handling characteristics.

DuraSkin®

Tires with **DuraSkin®** sidewall protection can take a beating as they are designed for the most adverse conditions. In rough terrain on a cyclocross or a gravel bike, on commuter bikes where tires scrape along curbs, on touring bikes as they cross continents encountering many different road qualities and on the race circuit where they prove themselves in endurance events such as the Paris-Roubaix. The high-quality polyamide fabric reliably protects the wall of the tire. Tires with DuraSkin® can be identified by the characteristic brown mesh sidewall.

Sprinter Gatorskin

TECHNOLOGY

SIZES

Sprinter Gatorskin

BlackChili Compound - SafetySystem Breaker - 3/180 TPI

Article	Dimension	Color/sidewall	g	PSI*	EAN	RRP/€
0196136	28 x 22	● Tubular	270	174	4 019238 334722	78,95
0196187	28 x 25	● Tubular	280	174	4 019238 549089	78,95

*max.

BLACK CHILI COMPOUND · Safety System · DuraSkin®

ROAD

- Grand Prix TR
- Aero 111
- Grand Prix 5000 AS TR
- Grand Prix 5000 S TR
- Grand Prix 5000 TT TR
- Grand Prix 5000
- Ultra Sport III
- Gator Hardshell
- Gatorskin
- Grand Sport Race

MTB

- Dubnital
- Trinotal
- Magnotal
- Xynotal
- Kryptotal
- Argotal
- Hydrotal
- Mountain King
- Cross King
- Race King
- Ruban | eRuban

GRAVEL

- Terra Adventure
- Terra Trail
- Terra Speed
- Terra Hardpack

URBAN

- Pure CONTACT
- eCONTACT Plus
- CONTACT Plus
- CONTACT Plus City
- CONTACT
- CONTACT Urban
- CONTACT Speed
- CONTACT Spike
- Top CONTACT Winter II
- RIDE City
- RIDE Tour

Suitable for E-Bikes

For our E-Bike tire we fall back on over 100 years' experience with moped and motorcycle tires. Allmost all of our urban/tour tires are rated to a standard speed of at least 25 km/h. Those tires marked E50 are also certified for S-Pedelecs. With their high quality structure, puncture protection is high and the rolling resistance is low offering protection from premature wear brought about by the additional driving force.

BlackChili Compound
PureGrip Compound
PolyX Breaker™
NyTech Breaker
Hardshell Protection
Vectran Breaker
DuraSkin®
SafetyPro Breaker
EXTRA PunctureBelt
Puncture ProTection
SafetyPlus Breaker
SafetySystem Breaker
SafetyPlus Pro Breaker



TECH

IT'S ALL ABOUT HOW YOU MIX IT

With our unique tread compound, we have revolutionized the sport of cycling. With the legendary BlackChili Compound we have answered the eternal question of the best balance of grip and rolling resistance for cycling. The latest polymers as well as specially developed carbon black particles and filler materials guarantee unique performance, be it on a road, gravel or a mountain bike, for time trialling or downhill.

BLACK CHILI COMPOUND




PURE GRIP FOR EVERYONE

PureGrip Compound is derived from an activated Silica compound and is a good example of how we integrate customer feedback continuously into our research and development. This mixture technology fits in perfectly alongside the BlackChili Compound. The name PureGrip does exactly what it says; exceptionally good grip and durability are the distinguishing features of this compound. Engineered with PureGrip in our Performance products in our road and mountain bike ranges.

PURE GRIP COMPOUND


CUT AND PUNCTURE PROOF

With PolyX Breaker™ car expertise comes to the bicycle tire sector. Polyester has been used successfully for years in car tires and has proved extremely effective. The extremely resistant polyester fibre is woven tightly crosswise. A very high fabric density is achieved which makes the breaker resistant not only to foreign bodies, but especially to punctures. The rolling resistance is not affected by this breaker.

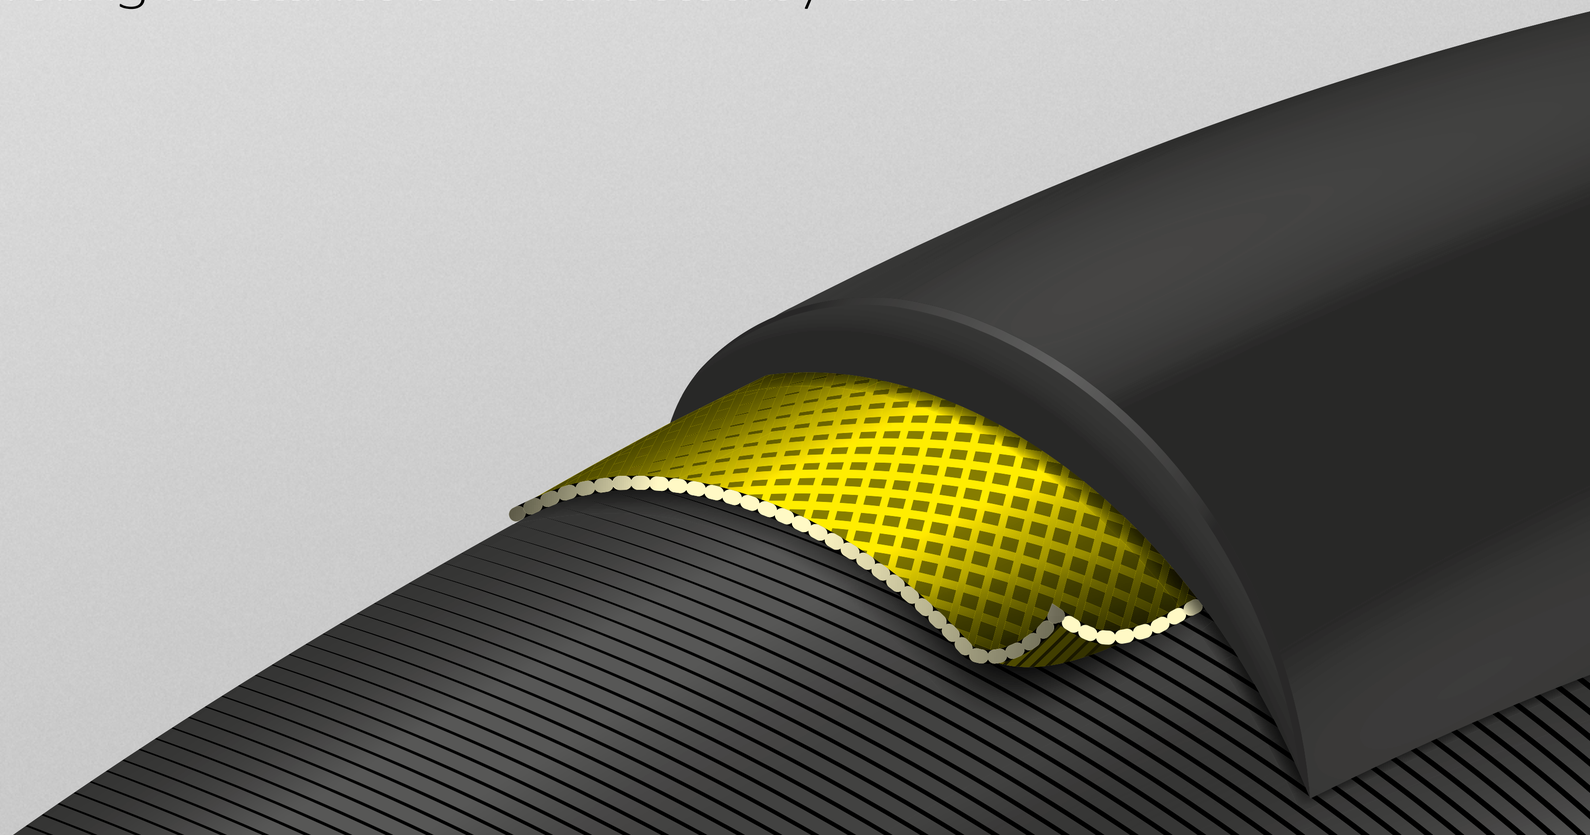

LIGHT AND SLEEK

The Nytech Breaker is based on the technology of our SafetySystem puncture protection. Made of nylon fibre and similar to Kevlar, it reliably protects against punctures and cuts. It also has particularly low rolling resistance and reduced weight, perfect for our performance range of road tires.

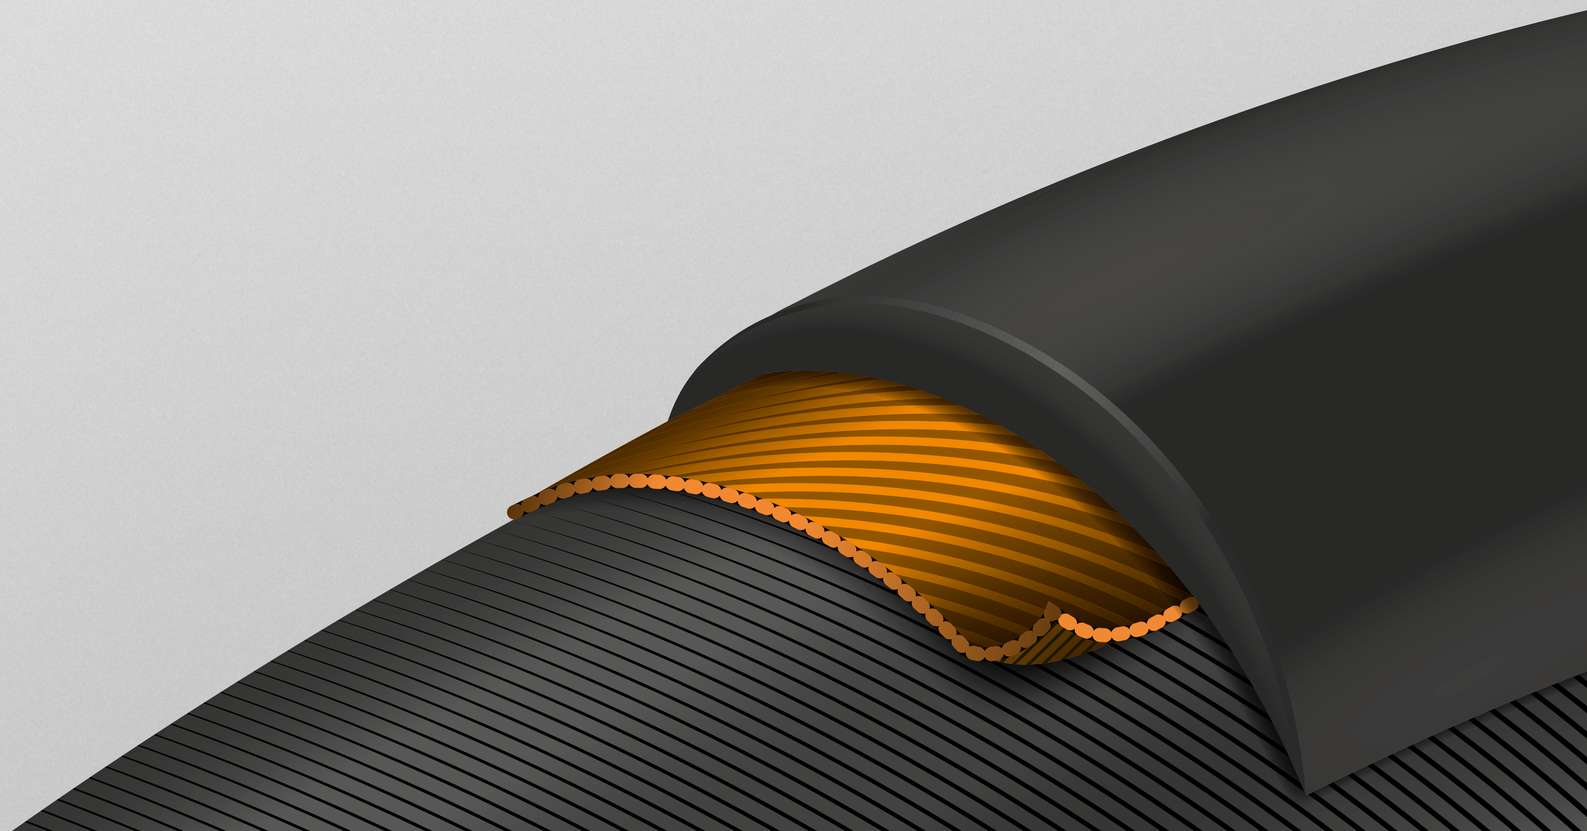

MORE IS WHAT YOU GET


Puncture protection and mileage are the strengths of Hardshell-ProTection. A wider PolyX Breaker™, the specialist against punctures, under the tread centre and shoulders provides for great reliability. The three-ply – each layer with 60 TPI – carcass covers the entire tire and makes it a real bastion against urban detritus. The outer sidewalls of the tire are reinforced with DuraSkin® fabric providing even more reliablility due to the casing being so well protected. Hardshell tires are the puncture-resistant flagship amongst racing tires.



CUT AND PUNCTURE PROOF

Vectran is spun from liquid crystal-polymer. This way a thermoplastic, multiple-thread yarn is created. As a comparison: This partially crystalline fabric is more cut-resistant than aramide and its tensile strength is five times higher than that of steel. A Vectran breaker is lighter, more flexible and effective against cuts than a comparable nylon breaker.
Without effecting rolling resistance.

Vectran™ BREAKER

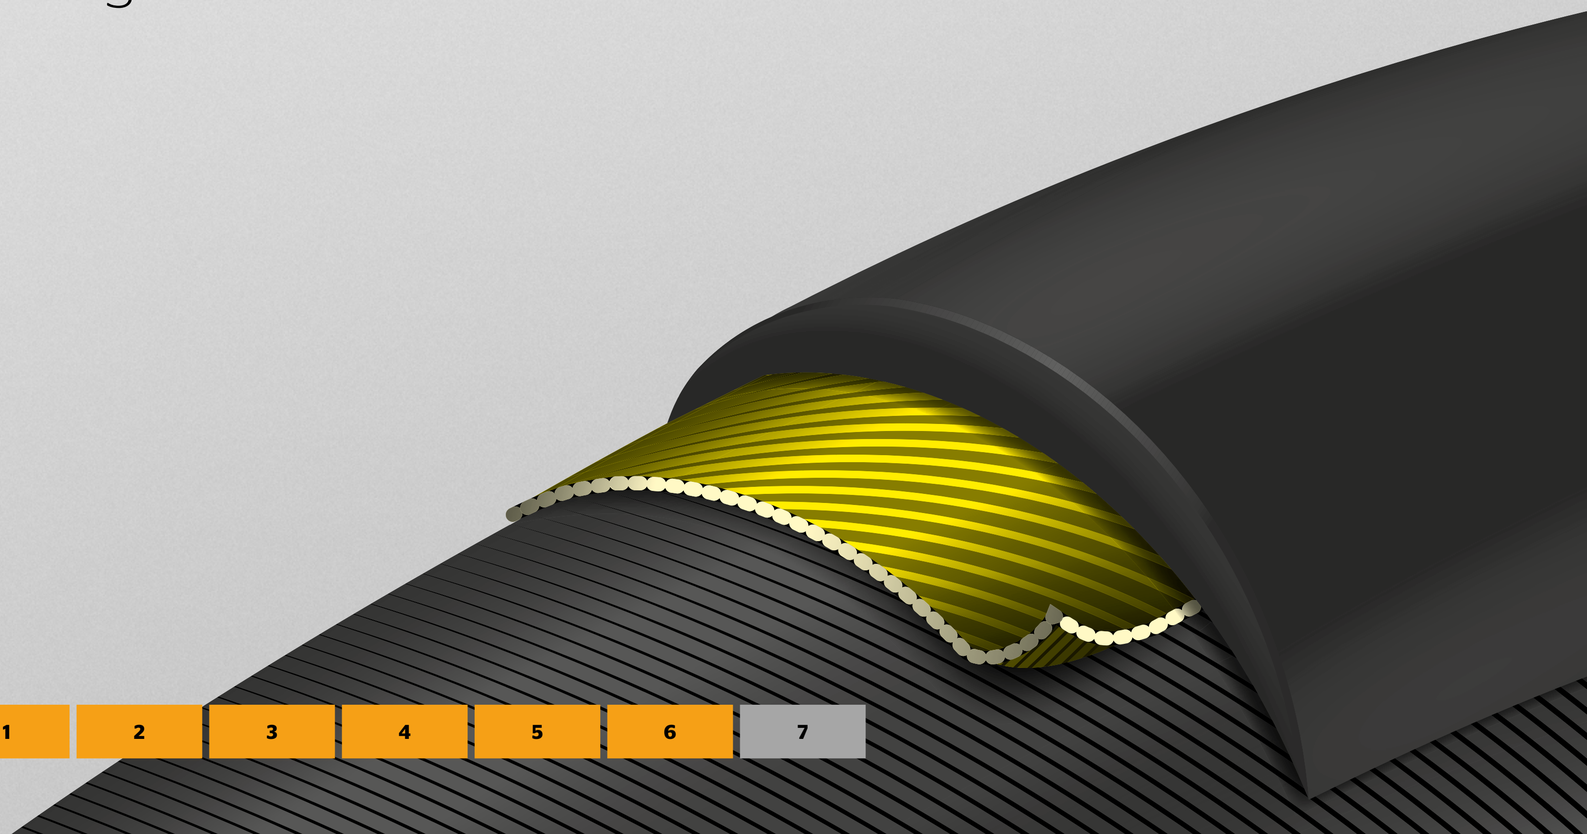

SAFETY LEVEL	1	2	3	4	5	6	7

FOR HARD CASES

Tires with DuraSkin® sidewall protection can take a beating as they are designed for the most adverse conditions. In rough terrain on a cyclocross or a gravel bike, on commuter bikes where tires scrape along curbs, on touring bikes as they cross continents encountering many different road qualities and on the race circuit where they prove themselves in endurance events such as the Paris-Roubaix. The high-quality polyamide fabric reliably protects the wall of the tire. Tires with DuraSkin® can be identified by the characteristic brown mesh sidewall.

DuraSkin®




SAFETY LEVEL	1	2	3	4	5	6	7

LIGHTWEIGHT PUNCTURE PROTECTION

The new SafetyPro Breaker designed from nylon textile. Cross-woven textile fiber netting that is simultaneously robust and flexible. Maximum puncture protection with minimal added weight. The risk of punctures resulting from glass or sharp stones is substantially reduced.


Safety Pro

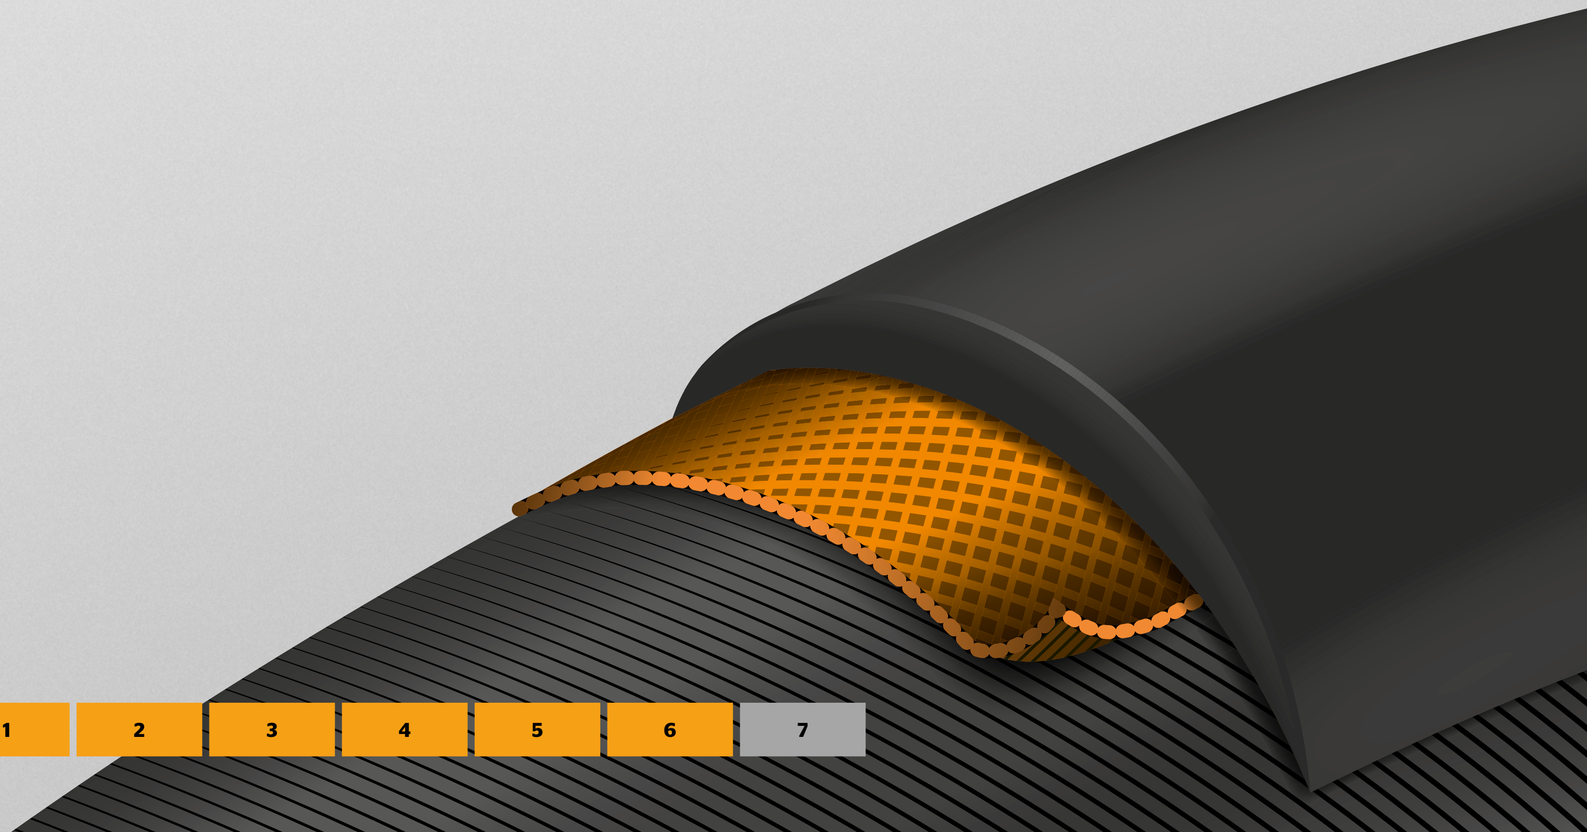

CAREFREE ON A DAILY BASIS

Anyone looking for a reliable everyday companion will go for a tire with EXTRA PunctureBelt. This rugged rubber breaker, combined with the rubber-reinforced sidewalls of the tire, ensures a high level of puncture protection and sidewall abrasion. Where durability is the main focus, there is also a solid tire version.

EXTRA Puncture BELT

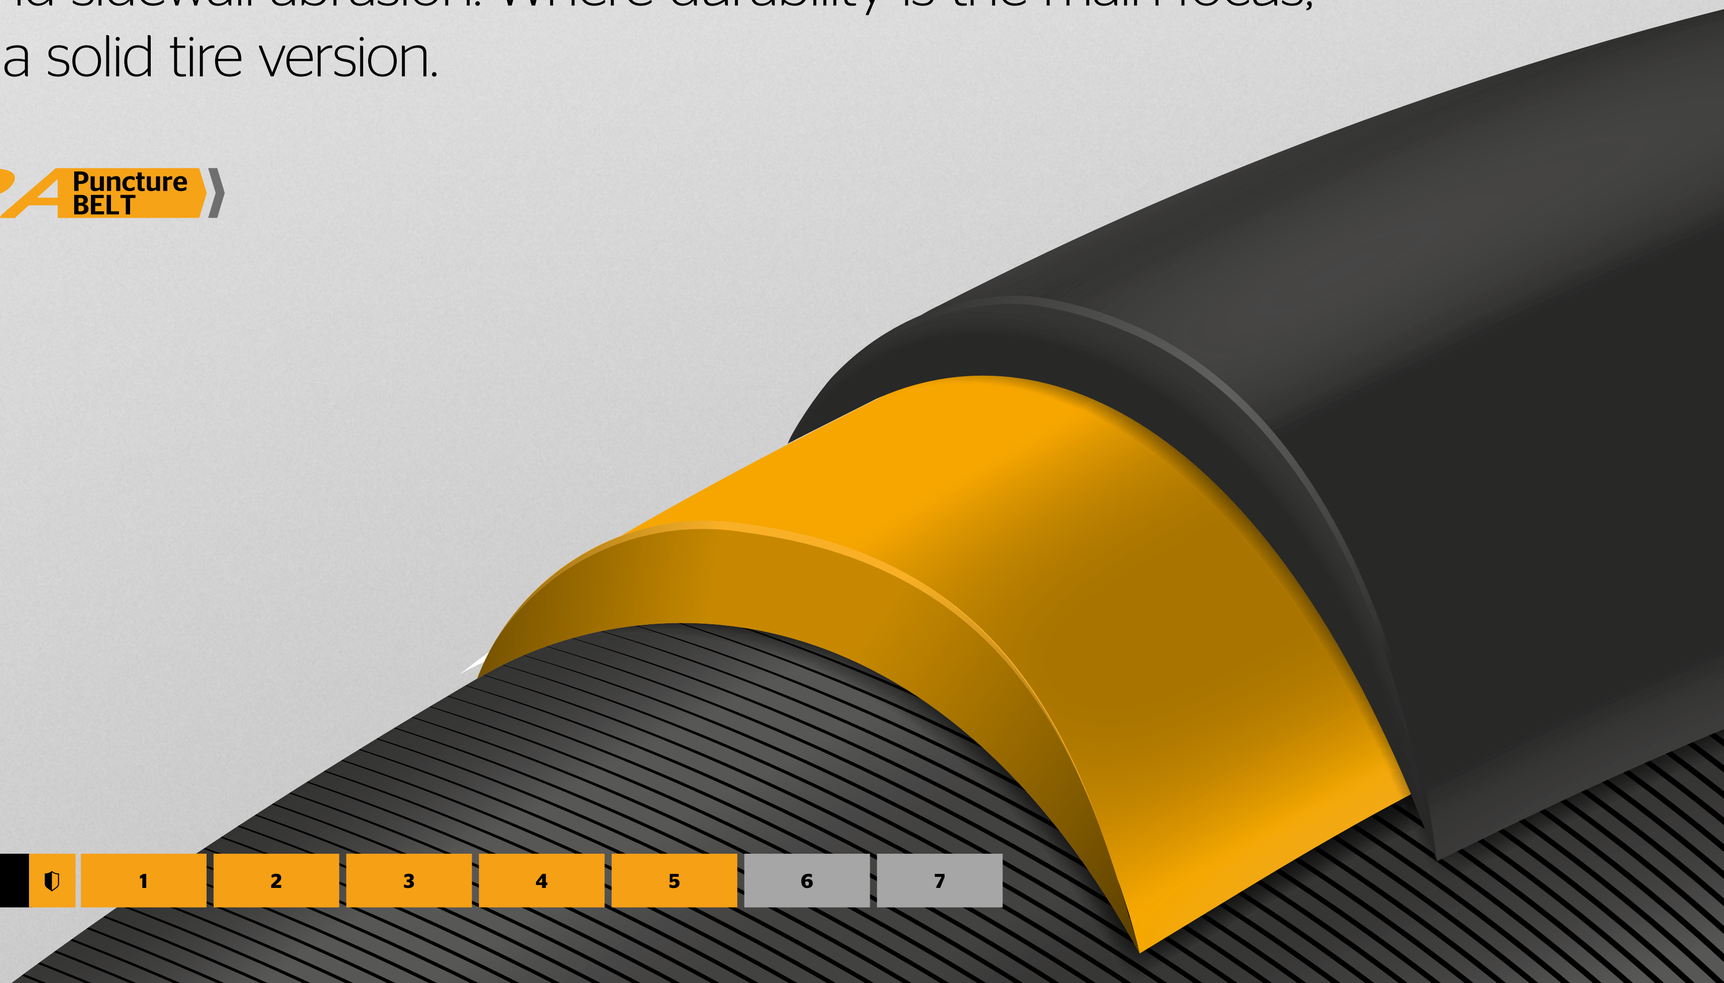


SAFETY LEVEL	1	2	3	4	5	6	7

THE NAME SPEAKS FOR ITSELF

An impeccable rubber Breaker, created for the daily ride on your Urban/Tour bike. The breaker ensures a high level of puncture protection and sidewall abrasion.

Puncture ProTection

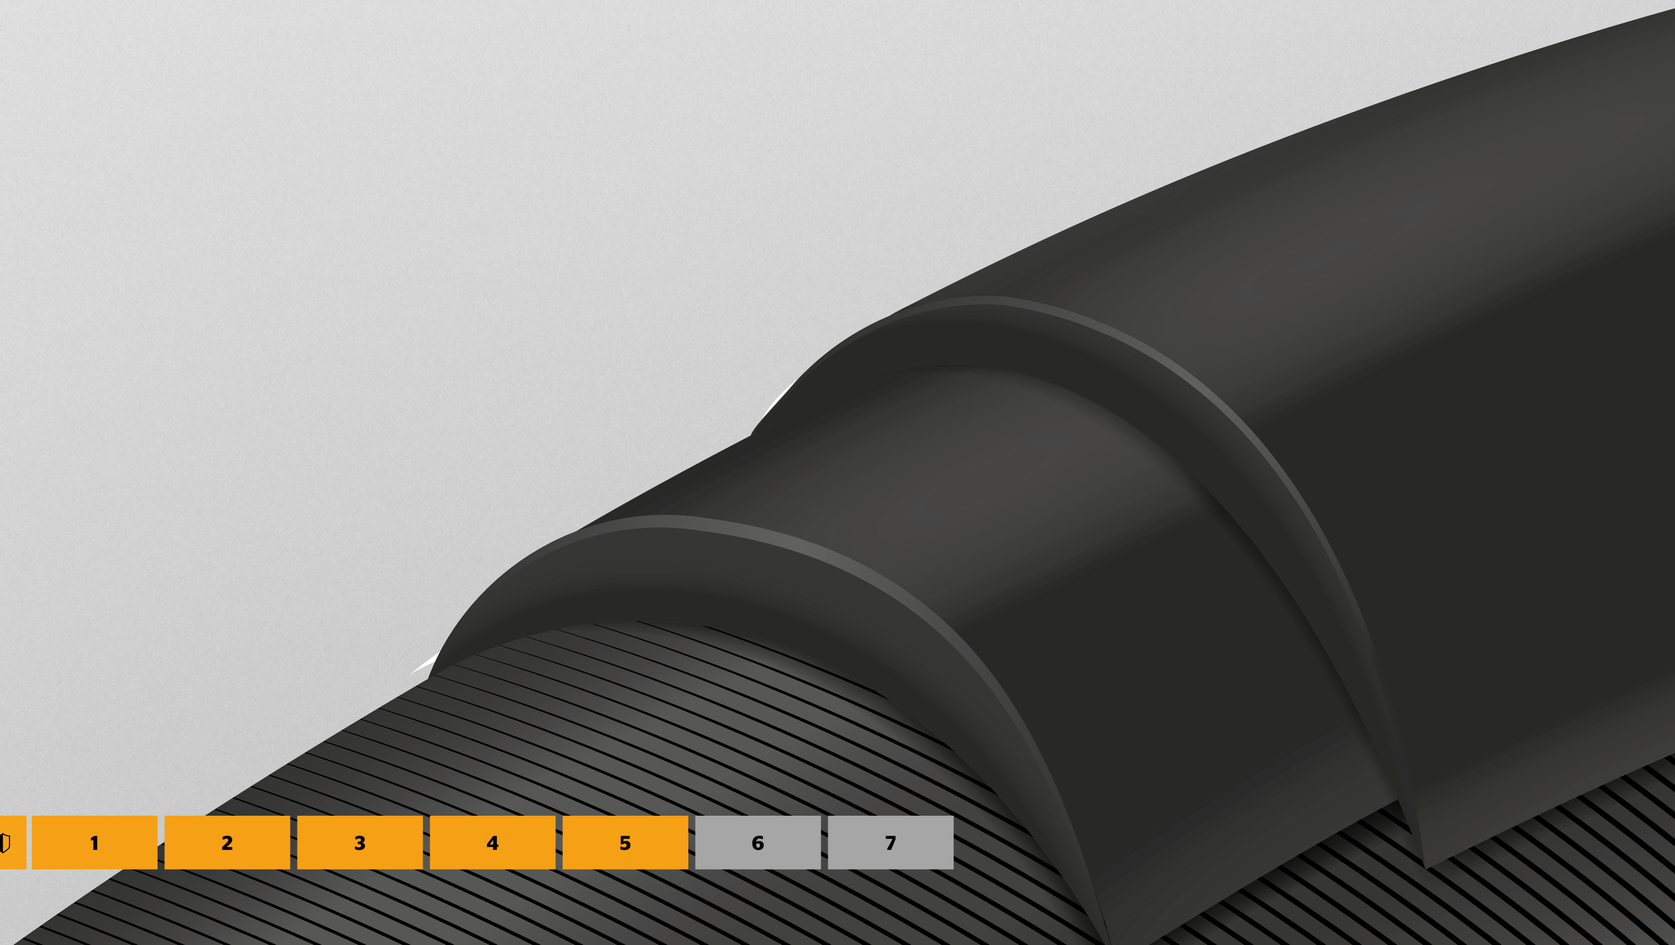


SAFETY LEVEL	1	2	3	4	5	6	7

THE ANTI-PUNCTURE SPECIALIST

Specially designed for e-bikes up to 50 km/h, we have combined our SafetySystem Breaker with a highly flexible natural rubber. The result is an extremely cut and puncture resistant breaker ply which has a low rolling resistance thanks to its high elasticity. This helps saving battery life and the environment. High acceleration torques and fast speeds in turns are easily absorbed by the breaker. The specialist for fast e-bikes and rental bikes.

Safety +

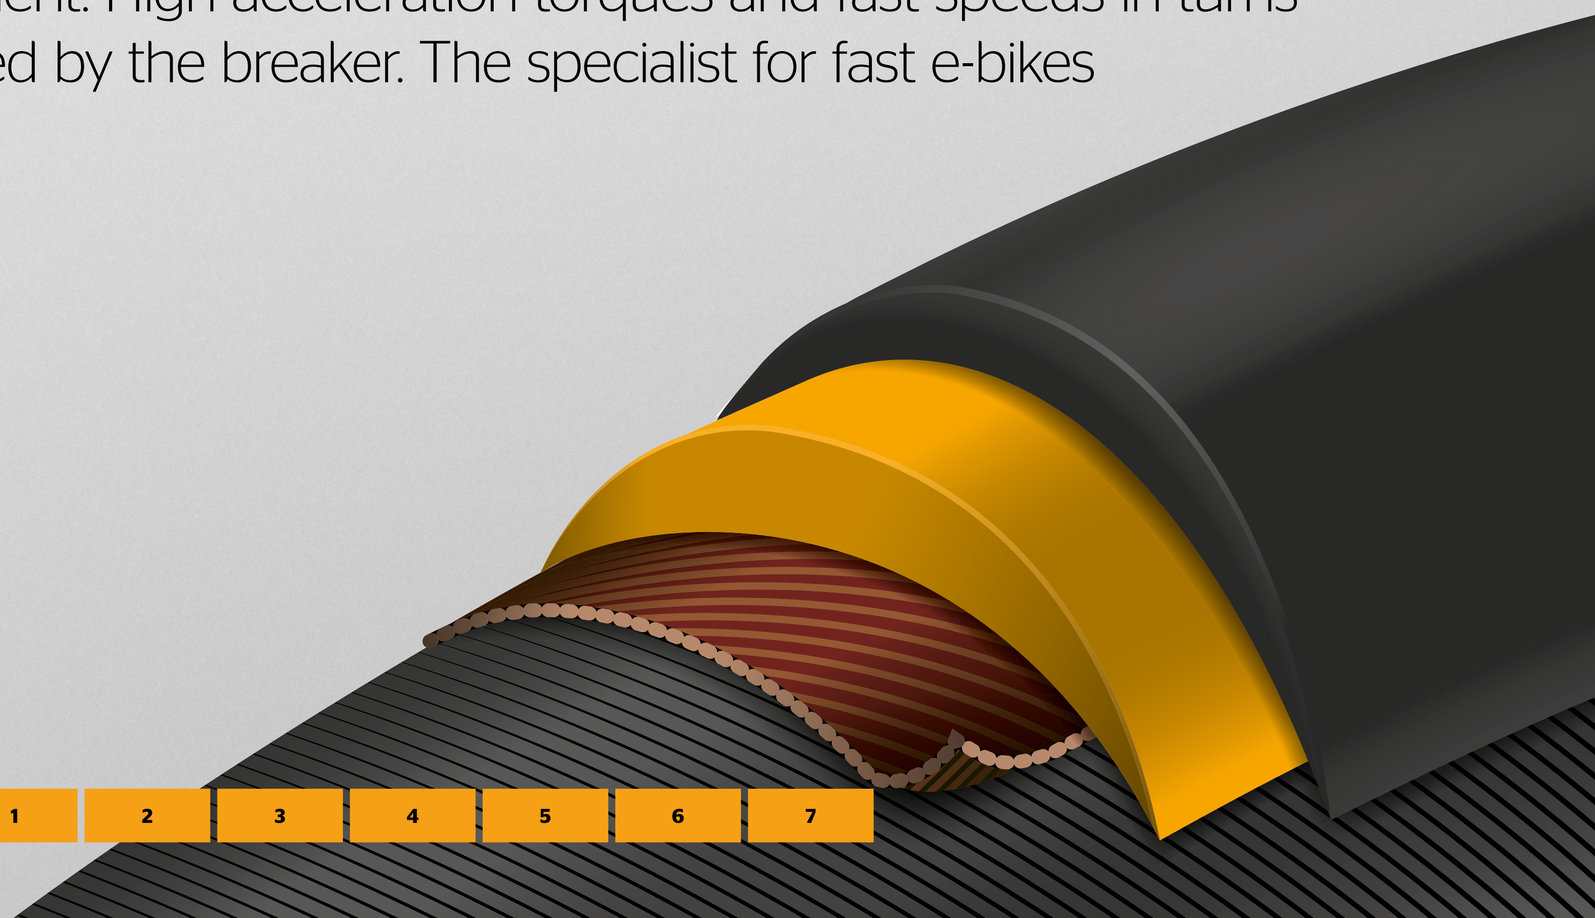


SAFETY LEVEL	1	2	3	4	5	6	7

PUNCTURE PROTECTION AS A SYSTEM

The SafetySystem Breaker consists of a Kevlar-reinforced, high-strength nylon fabric. Puncture and cut resistant, whilst also being light and flexible, allowing the tire to adapt more effectively to the terrain. The breaker protects the carcass against foreign objects and contributes to a longer lifespan of the tire without significantly increasing weight or rolling resistance. Additionally, tires with SafetySystem have particularly comfortable handling characteristics.

Safety System

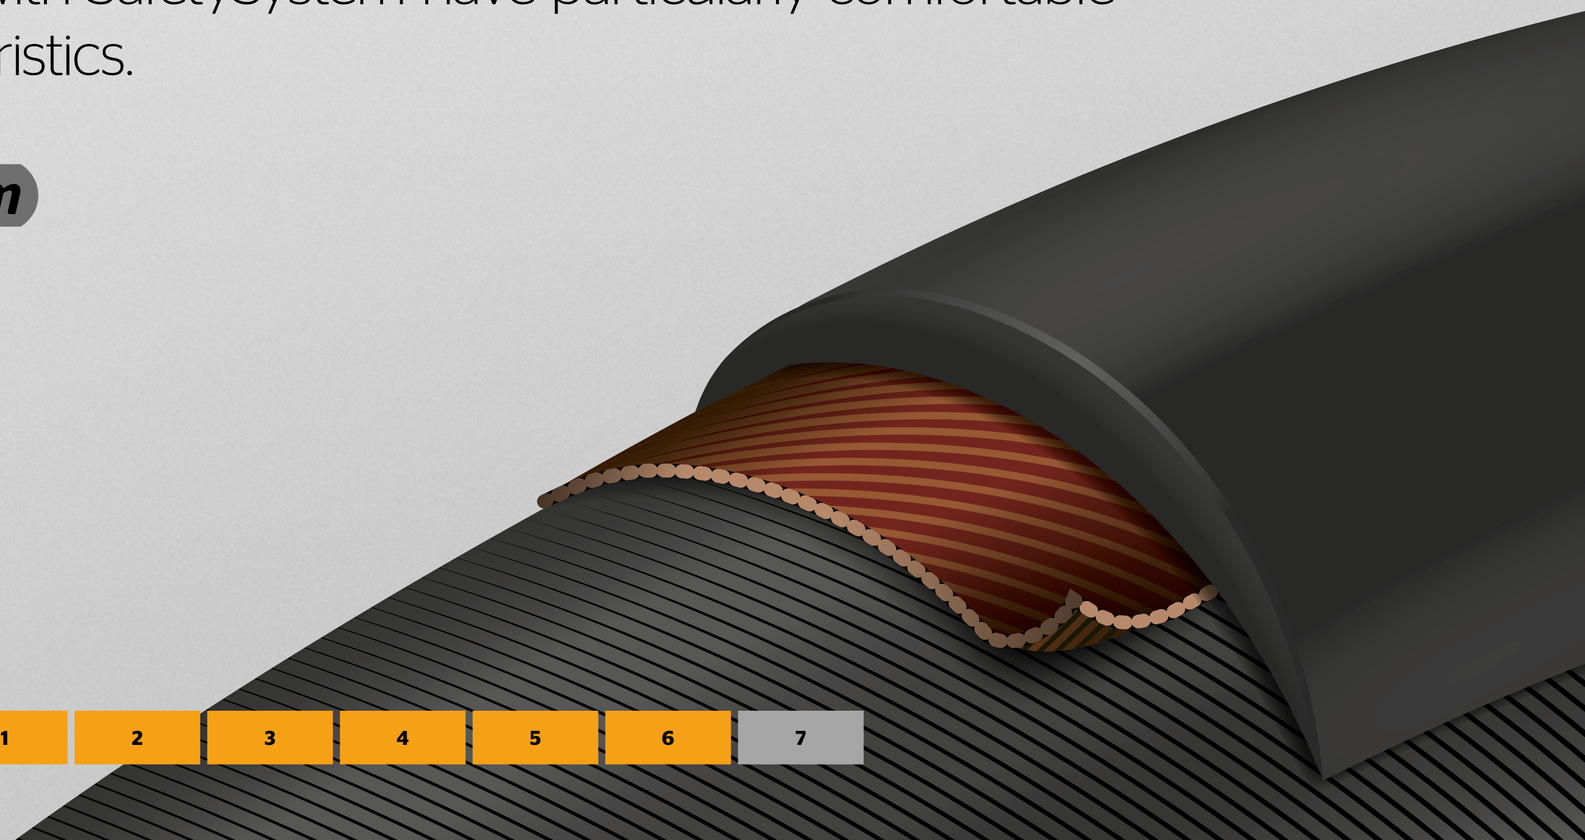

SAFETY LEVEL	1	2	3	4	5	6	7

THE SPECIALIST FOR E-BIKES AND CARGO BIKES

Engineered for the unique demands of modern e-bikes and cargo bikes up to 50 km/h. Our SafetyPlus Pro Breaker technology combines highly flexible rubber with the proven strength of our tightly woven PolyX puncture-resistant fibers. The high elasticity keeps rolling resistance low, prolonging the e-bike battery life so you get moremiles from each charge. When riding with heavy loads, the SafetyPlus Pro Breaker contributes to confident handling through busy traffic and sharp corners, no matter the conditions.

Safety + Pro



Tires and Sizes



SIZES
12” – 27.5”



SIZES
27.5” – 28”



SIZES
28”



SIZES
28” – 29”





12”

62-203

RIDE Tour

16”

35-349

CONTACT Urban

47-305

Double Fighter III

RIDE Tour

20”

28-406

CONTACT Speed

32-406

CONTACT Urban

37-406

CONTACT

42-406

CONTACT Urban

47-406

Double Fighter III

CONTACT

RIDE Tour

50-406

Cross King

eCONTACT Plus

CONTACT Urban

55-406

eCONTACT Plus

60-406

Kryptotal Fr

Kryptotal Re

62-406

eRuban Plus

eCONTACT Plus

24”

47-507

Double Fighter III

CONTACT Plus

RIDE Tour

50-507

Cross King

Double Fighter III

60-507

Kryptotal Fr

Kryptotal Re

26”

23-571

Gatorskin

26 x 22

Sprinter

28-559

Gatorskin

32-559

CONTACT Speed

42-559

CONTACT Speed

47-559

Hometrainer II

CONTACT Plus

47-559

CONTACT Plus City

CONTACT

CONTACT Urban

RIDE City

RIDE Tour

50-559

Cross King ShieldWall

Race King

Race King ShieldWall

Double Fighter III

CONTACT Urban

CONTACT Speed

Top CONTACT Winter II Premium

55-559

Trinotal

Cross King

Cross King ShieldWall

Race King

Race King ShieldWall

Speed King

eCONTACT Plus

CONTACT Plus City

CONTACT Urban

Top CONTACT Winter II Premium

58-559

Mountain King

Mountain King ShieldWall

58-559

Cross King

Cross King ShieldWall

eRuban Plus

60-559

Kryptotal Fr

Kryptotal Re

27”

28-630

Super Sport Plus

32-630

Gator Hardshell

32-630

Gatorskin

Super Sport Plus

RIDE Tour

37-609

RIDE Tour

27.5”

25-584

Grand Prix 5000

Ultra Sport III

CONTENT

Tires and Sizes

SIZES
12” – 27.5”

SIZES
27.5” – 28”

SIZES
28”

SIZES
28” – 29”

28-584
- Grand Prix 5000
- Ultra Sport III

30-584
- Grand Prix 5000 S TR

32-584
- Grand Prix 5000 S TR
- CONTACT Speed

35-584
- Terra Speed ProTection

37-584
- RIDE Tour

40-584
- Terra Trail ProTection
- Terra Speed ProTection

42-584
- CONTACT Plus
- CONTACT Urban
- RIDE Tour

47-584
- Terra Trail ShieldWall

50-584
- Hometrainer II
- Cross King
- Cross King ShieldWall
- Race King
- Race King ShieldWall
- Double Fighter III
- Terra Hardpack
- Pure CONTACT
- CONTACT Urban
- CONTACT Speed
- Top CONTACT Winter II Premium

54-584
- Ruban
- Ruban ShieldWall
- RIDE Tour

55-584
- Dubnital
- Cross King
- Cross King ShieldWall
- Race King
- Race King ShieldWall

55-584
- Pure CONTACT
- eCONTACT Plus
- CONTACT Plus City
- CONTACT Urban

58-584
- Ruban
- Ruban ShieldWall
- eRuban Plus
- Mountain King
- Mountain King ShieldWall
- Cross King
- Cross King ShieldWall

60-584
- Dubnital
- Trinotal
- Magnotal
- Xynotal
- Kryptotal Fr
- Kryptotal Re
- Argotal
- Hydrotal

60-584
- Pure CONTACT

62-584
- eCONTACT Plus
- CONTACT Urban

65-584
- Magnotal
- Kryptotal Re
- Argotal
- Mountain King ShieldWall
- Cross King ShieldWall
- Ruban
- Ruban ShieldWall
- eRuban Plus

70-584
- Mountain King ShieldWall
- Cross King ShieldWall

28”

23-622
- Grand Prix 5000
- Grand Prix 4-Season
- Ultra Sport III

23-622
- Gator Hardshell
- Gator Hardshell Black Edition
- Gatorskin
- Gatorskin Black Edition
- Grand Sport Race
- Hometrainer II
- Super Sport Plus

25-622
- Grand Prix TR
- Grand Prix 5000 AS TR
- Grand Prix 5000 S TR
- Grand Prix 5000 TT TR
- Grand Prix 5000
- Grand Prix 4-Season
- Ultra Sport III
- Gator Hardshell
- Gator Hardshell Black Edition
- Gatorskin
- Gatorskin Black Edition
- Grand Sport Race
- Super Sport Plus

Tires and Sizes



SIZES
12” – 27.5”



SIZES
27.5” – 28”



SIZES
28”



SIZES
28” – 29”

26-622
- AERO 111

28-622
- Grand Prix TR
- Grand Prix
- Grand Prix 5000 AS TR
- Grand Prix 5000 S TR
- Grand Prix 5000 TT TR
- Grand Prix 5000
- Grand Prix 4-Season
- Ultra Sport III
- Gator Hardshell
- Gator Hardshell Black Edition
- Gatorskin
- Gatorskin Black Edition
- Grand Sport Race
- CONTACT Plus
- CONTACT
- CONTACT Urban
- CONTACT Speed
- Super Sport Plus
- RIDE Tour

26 x 22
- Competition

28 x 19
- Competition

28 x 22
- Competition
- Sprinter
- Sprinter Gatorskin

28 x 23
- Sonderklasse II

28 x 25
- Competition
- Sprinter
- Sprinter Gatorskin

29-622
- AERO 111

30-622
- Grand Prix TR
- Grand Prix
- Grand Prix 5000 S TR
- Grand Prix 5000

32-622
- Grand Prix TR
- Grand Prix 5000 AS TR
- Grand Prix 5000 S TR
- Grand Prix 5000
- Grand Prix 4-Season
- Ultra Sport III
- Gator Hardshell
- Gator Hardshell Black Edition
- Gatorskin
- Gatorskin Black Edition
- Grand Sport Race
- Hometrainer II
- CONTACT Plus
- CONTACT

32-622CONTACT Urban
- CONTACT Speed
- CONTACT Spike 120
- RIDE City
- RIDE Tour

35-622
- Grand Prix 5000 AS TR

35-622
- Grand Prix Urban
- Terra Speed ProTection
- Terra Trail ShieldWall
- CONTACT Urban
- Urban TaraxaGum

37-622
- Double Fighter III
- CONTACT Plus
- CONTACT Plus City
- CONTACT
- CONTACT Urban
- CONTACT Speed
- CONTACT Spike 120
- CONTACT Spike 240
- Top CONTACT Winter II Premium
- RIDE Tour
- RIDE City

37-635
- RIDE Tour

40-622
- Terra Trail ProTection

40-622
- Terra Speed ProTection
- Terra Trail ShieldWall
- Pure CONTACT
- CONTACT Plus
- CONTACT Urban

42-622
- CONTACT Plus
- CONTACT Plus City
- CONTACT
- CONTACT Urban
- CONTACT Speed
- CONTACT Spike 120
- CONTACT Spike 240
- Top CONTACT Winter II Premium
- RIDE Tour
- RIDE City

42-635
- CONTACT Plus
- RIDE Tour

45-622
- Terra Adventure

CONTENT

Tires and Sizes

SIZES
12” – 27.5”

SIZES
27.5” – 28”

SIZES
28”

SIZES
28” – 29”

45-622
- Terra Trail ShieldWall
- Terra Speed ProTection

47-622
- Pure CONTACT
- CONTACT Plus
- CONTACT Plus City
- CONTACT
- CONTACT Urban
- RIDE Tour
- RIDE City

50-622
- Terra Adventure
- Terra Hardpack ShieldWall
- Pure CONTACT
- eCONTACT Plus
- CONTACT Urban

55-622
- Pure CONTACT
- eCONTACT Plus
- CONTACT Urban

62-622
- eCONTACT Plus
- CONTACT Urban

29”

50-622
- Cross King
- Cross King ShieldWall
- Race King
- Race King ShieldWall
- Double Fighter III
- Pure CONTACT

54-622
- Ruban
- Ruban ShieldWall
- eRuban Plus

55-622
- Dubnital
- Trinotal
- Cross King
- Cross King ShieldWall
- Race King
- Race King ShieldWall

55-622
- Terra Adventure
- Pure CONTACT

58-622
- Mountain King
- Mountain King ShieldWall
- Cross King
- Cross King ShieldWall
- Ruban
- Ruban ShieldWall
- eRuban Plus

60-622
- Dubnital
- Trinotal
- Magnotal
- Xynotal
- Kryptotal Fr
- Kryptotal Re
- Argotal
- Hydrotal

65-622
- Kryptotal Fr

65-622
- Kryptotal Re
- Argotal
- Cross King ShieldWall
- Ruban
- Ruban ShieldWall
- eRuban Plus

CONTENT


Tubes

TPU

WORKSHOP

HERMETIC PLUS

COMPACT

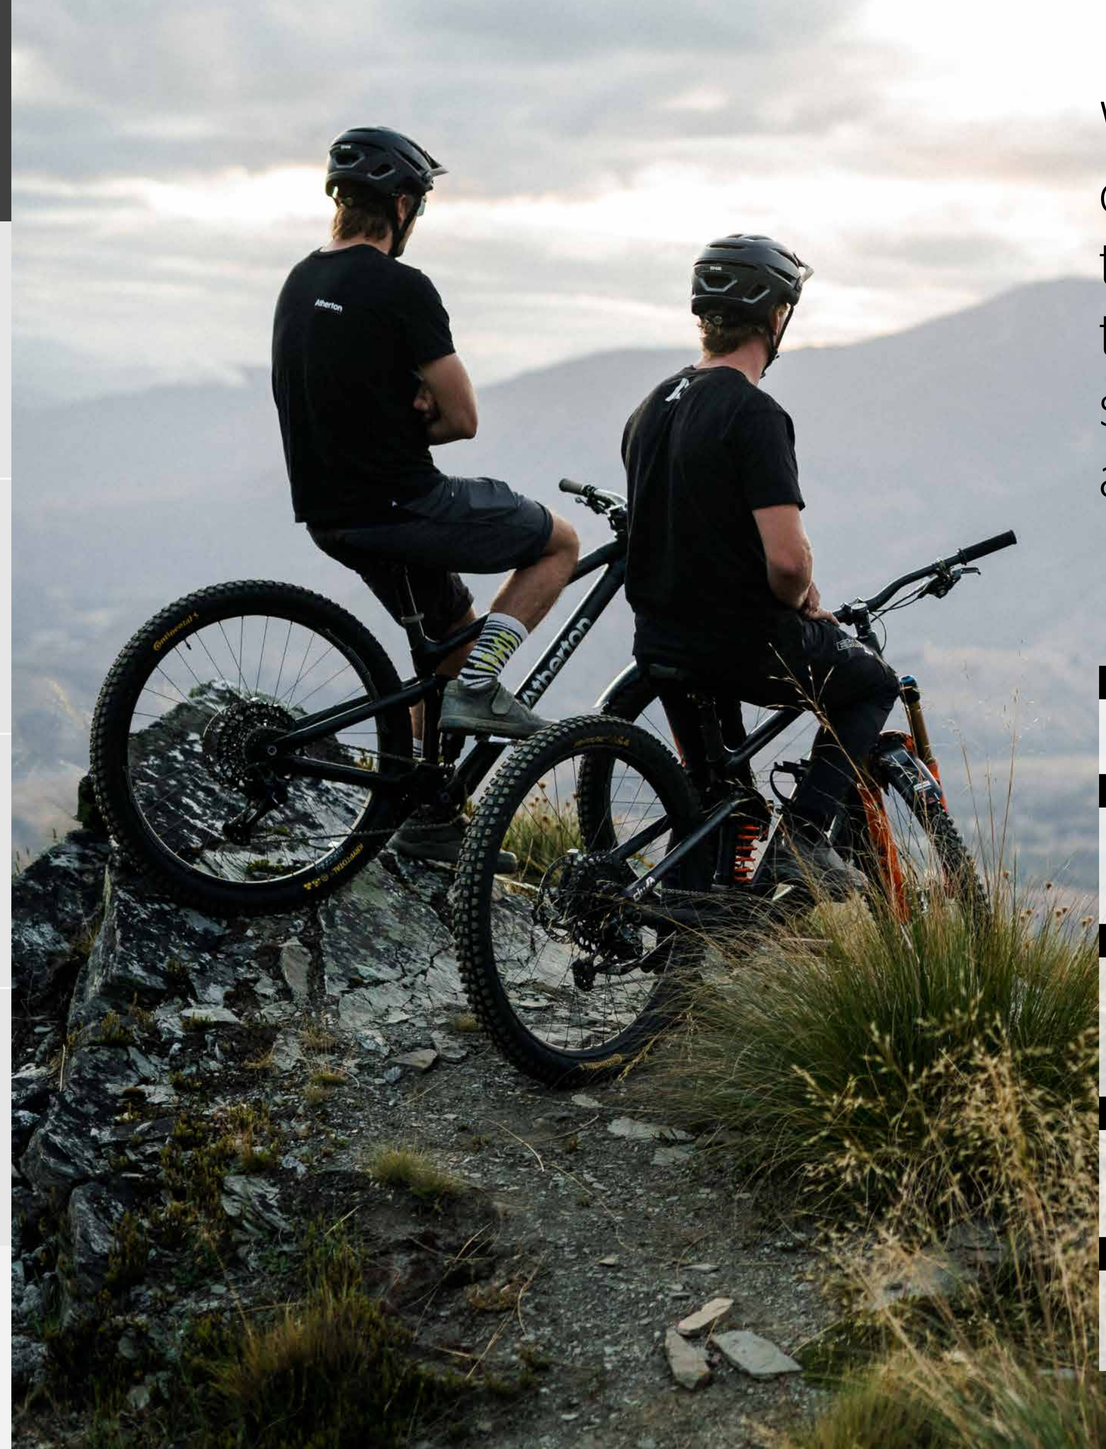

With the **ContiTube program,** you can find the inner tube most suited to your needs. Depending on your tire dimensions and purpose, different sizes, types, valve types and widths are available.

All

The all-rounder for day to day demands. Available in all usual dimensions.

Light and Supersonic

Perceptible optimization of weight and rolling resistance due to thinner material.
! Light tubes generally require more frequent reinflating.

Hermetic Plus

The all-round carefree product. Designed for the most comprehensive puncture protection and air retention due to enhanced butyl content and increased wall thickness.

Freeride and Downhill

Extra strong and increased volume. Effectively protects against punctures thanks to thicker material.

TPU

Small but mighty. Highest grade of micrometer-thick TPU deployed across seven sealed layers. Suitable for road and off-road riders.

TPU TUBES

A seven-layer lightweight TPU Inner Tube for performance-focused and space-saving road, gravel and MTB riders.

Available in a wide range of sizes from 25/35-622, **ContiTPU** is premium, lightweight yet durable and suitable for both road and off-road riders.
The highest grade of micrometer-thick TPU deployed across seven sealed layers maximises airtightness and durability. The tubes are uncoloured to further ensure the highest material quality and prevent air retention issues caused by dye-related surface imperfections. Every ContiTPU tube is quality-checked post-production. The base of the valve shaft is slightly conical in shape to improve fit to the wheel rim and reduce unwanted movement, while the valve is internally threaded to allow for the use of valve extensions or a replacement valve core.



Auto Schrader



Blitz Dunlop



Sclaverand Presta



Sclaverand Presta



Sclaverand Presta



Sclaverand Presta

		A34	A34 45°	A40	D26	D40	S42	S60	S80	S100		
TPU												
ETRTO	**Version**	**Article**	**Article**	**Article**	**Article**	**Article**	**Article**	**Article**	**Article**	**Article**	**g**	**RRP €**
28”												
40-584->60-584	TPU							**0182611**			45	30,95
25-622->35-622	TPU						**0182711**	**0182621**	**0182721**	**0182731**	35	30,95
40-622->60-622	TPU							**0182631**			45	30,95

Tubes

TPU

WORKSHOP

HERMETIC PLUS

COMPACT

Lightweight

Easy to repair
(enclosed repair kit)



Low rolling resistance

Small Packing size

TPU
WORKSHOP
HERMETIC PLUS
COMPACT

IMPORTANT INFORMATION

1. **TPU tubes must never be used in conjunction with rim brakes.** Excessive heat exposure can lead to a sudden loss of air pressure.


2. **Use suitable rim tape to protect the TPU tube.** Otherwise, it can become damaged.

3. **During mounting, the TPU tubes must not be inflated over 0.3 bar.** Over-inflation during this part of the process can excessively stretch the tube and render it unusable.

4. **Ensure the valve hole in the rim is the correct diameter.** If the valve hole is too large, the valve can twist or shear off.

5. **Pay close attention when mounting the tube.** Always ensure the tube or valve isn't trapped, twisted or damaged.

6. **TPU tubes must never be re-used with a smaller tire!** If you are mounting a smaller tire, then it is necessary to use a new tube.

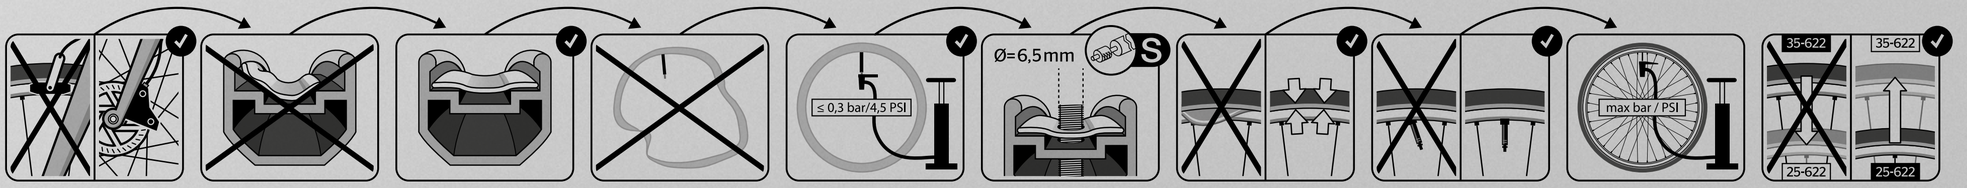

Tubes

TPU
WORKSHOP
HERMETIC PLUS
COMPACT



Auto Schrader



Blitz Dunlop



Sclaverand Presta



Sclaverand Presta



Sclaverand Presta

		A34	A34 45°	A40	D26	D40	S42	S60	S80		
Workshop (50 pcs/PU)											
ETRTO	**Version**	**Article**	**Article**	**Article**	**Article**	**Article**	**Article**	**Article**	**Article**	**g**	**RRP €**
26”											
47-559->62-559	MTB			**0180581**		**0180521**	**0180551**			205	
26” (27.5”)											
37-559->47-597	Tour					**0180621**				175	
	Tour Hermetic Plus					**0180751**				255	
27.5”											
47-584->62-584	MTB						**0182351**			230	
28” / 29”											
18-622->25/630	Race						**0180591**	**0180611**	**0180024**	100	
32-622->47-642	Tour			**0180691**		**0180651**	**0180681**			165	
	Tour Hermetic Plus			**0180721**		**0180711**				225	
47-622->62-622	MTB						**0182361**			235	
Race 26”											
20-559->25-571							**0181371**	**0181381**		150	starts with 9,95
	Light						**0181391**	**0181411**		70	starts with 11,95
	Supersonic						**0181421**	**0181431**		50	starts with 13,95
Race 28”											
20-622->25-630							**0181781**	**0181791**	**0180000**	100	starts with 9,95
	Light						**0181821**	**0181831**	**0181871**	85	starts with 11,95
	Supersonic						**0181881**	**0181891**		100	starts with 16,95
25-622->32-630	Wide						**0181921**	**0181931**		125	starts with 8,95
Cross 28”											
32-622->47-622							**0181941**	**0181951**		160	starts with 8,95

Tubes

TPU
WORKSHOP
HERMETIC PLUS
COMPACT



Auto Schrader



Blitz Dunlop



Sclaverand Presta



Sclaverand Presta



Sclaverand Presta

		A34	A34 45°	A40	D26	D40	S42	S60	S80		
ETRTO	**Version**	**Article**	**Article**	**Article**	**Article**	**Article**	**Article**	**Article**	**Article**	**g**	**RRP €**
MTB 26”											
47-559->62-559				**0181611**		**0181621**	**0181631**	**0181671**		205	starts with 8,95
47-559->60-559	Light						**0181681**			125	11,95
47-559->55-559	Supersonic						**0181691**			100	16,95
57-559->70-559	Freeride			**0181721**			**0181731**			295	15,95
	Downhill			**0181771**						535	15,95
MTB 27.5”											
47-584->62-584				**0182331**			**0182311**			230	8,95
47-584->60-584	Light						**0182341**			145	11,95
65-584->70-584	Wide			**0180017**			**0180015**			345	11,95
	Wide Light						**0180019**			275	14,95
MTB 29”											
47-622->62-622				**0182171**		**0183051**	**0182181**	**0182191**		235	starts with 8,95
47-622->60-622	Light						**0182321**	**0182201**		190	starts with 11,95
65-622->70-622	Wide			**0180031**			**0180034**			325	11,95
Tour 26”											
28-559->32-597	Slim					**0181471**	**0181481**			145	8,95
37-559->47-590	All			**0181491**		**0181511**	**0181521**			175	8,95
47-559->62-559	Wide			**0181531**		**0181571**	**0181591**			200	8,95
Tour 28”											
28-622->37-622/32-630	Slim			**0181971**		**0181981**	**0181991**			140	8,95
32-622->47-622/42-635	All			**0182001**		**0182021**	**0182031**	**0182041**		165	starts with 8,95
	Light			**0182051**		**0182061**	**0182071**			115	11,95
47-622->62-622	Wide			**0182121**		**0182131**	**0182161**			235	8,95



Auto Schrader



Blitz Dunlop



Sclaverand Presta



Sclaverand Presta



Sclaverand Presta

		A34	A34 45°	A40	D26	D40	S42	S60	S80		
Hermetic Plus											
ETRTO	**Version**	**Article**	**Article**	**Article**	**Article**	**Article**	**Article**	**Article**	**Article**	**g**	**RRP €**
Compact 20"											
32-406->47-451		**0180037**				**0180039**				190	9,50
50-406->62-406	Wide	**0180042**				**0180045**				230	9,50
Compact 24"											
32-507->47-544				**0182231**		**0182241**				235	9,50
55-507->62-507	Wide			**0182581**						370	9,50
Tour 26"											
37-559->47-590	All			**0182251**		**0182261**	**0182271**			255	9,50
47-559->62-559	Wide					**0181581**				300	9,50
Tour 28"											
32-622->47-622/42-635	All			**0182101**		**0182081**	**0182091**			225	9,50
47-622->62-622	Wide					**0182151**				325	9,50

Tubes

TPU
WORKSHOP
HERMETIC PLUS
COMPACT



Auto Schrader



Blitz Dunlop



Sclaverand Presta



Sclaverand Presta



Sclaverand Presta

		A34	A34 45°	A40	D26	D40	S42	S60	S80		
Compact Tubes											
ETRTO	**Version**	**Article**	**Article**	**Article**	**Article**	**Article**	**Article**	**Article**	**Article**	**g**	**RRP €**
Compact 8”											
54-110					**0180991**					70	7,50
Compact 10” /11” / 12”											
44-194->62-222		**0181051**	**0182211**		**0181071**					95	7,50
Compact 14”											
32-279->47-298					**0181081**					100	7,50
Compact 16”											
32-305->47-349		**0181091**			**0181111**		**0181121**			110	7,50
50-305->62-305	Wide	**0181131**			**0181171**					120	7,50
Compact 18”											
32-355->47-400				**0180026**	**0181181**					125	7,50
Compact 20”											
28-406->32-451	Slim						**0181191**			105	7,50
32-406->47-451		**0181211**				**0181221**	**0181231**			135	7,50
50-406->62-406	Wide	**0181271**				**0181281**				155	7,50
Compact 24”											
32-507->47-544				**0181291**		**0181311**	**0180027**			155	7,50
50-507->60-507	Wide			**0181321**		**0181331**				195	7,50


INSTRUCTION 1 - 3

INSTRUCTION 4 - 6

INSTRUCTION 7 - 9

TIPS AND TRICKS

In individual cases where the tire bead does not properly sit on the inside of the rim, try unscrewing the valve nut and pushing the valve back. Valves with a round rubber end have a lower volume than those with a rectangular rubber end. Maybe you could try to change your existing valve to fit your tire accordingly.

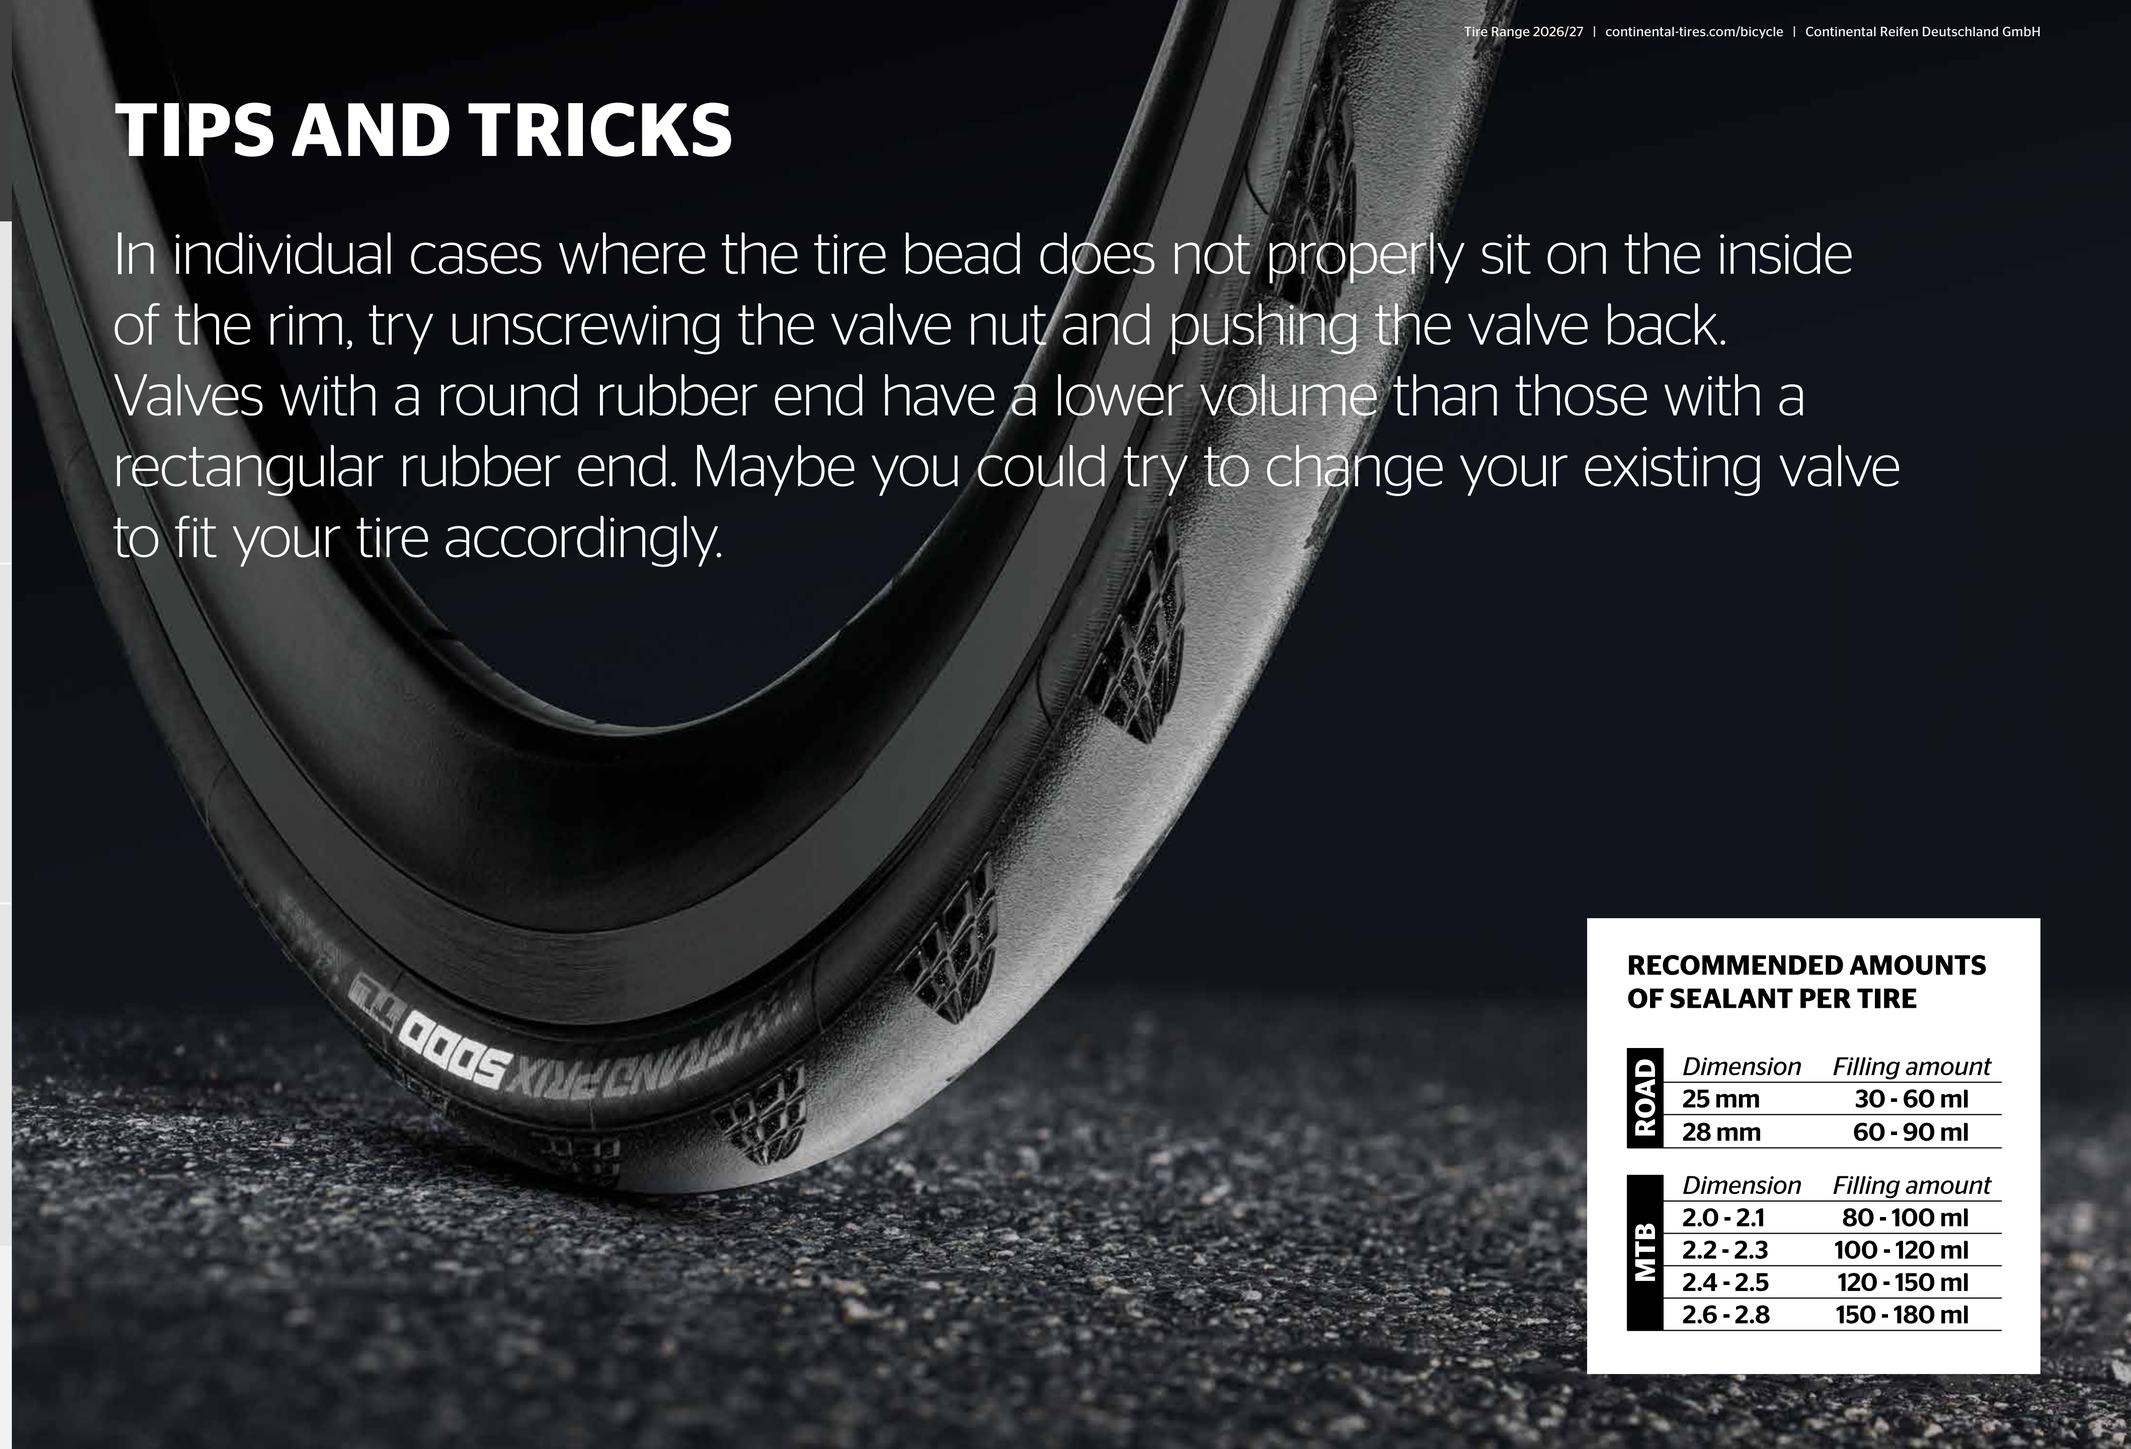

RECOMMENDED AMOUNTS OF SEALANT PER TIRE


ROAD	*Dimension*	*Filling amount*
	25 mm	30 - 60 ml
	28 mm	60 - 90 ml

MTB	*Dimension*	*Filling amount*
	2.0 - 2.1	80 - 100 ml
	2.2 - 2.3	100 - 120 ml
	2.4 - 2.5	120 - 150 ml
	2.6 - 2.8	150 - 180 ml


INSTRUCTION 1 - 3

INSTRUCTION 4 - 6


INSTRUCTION 7 - 9

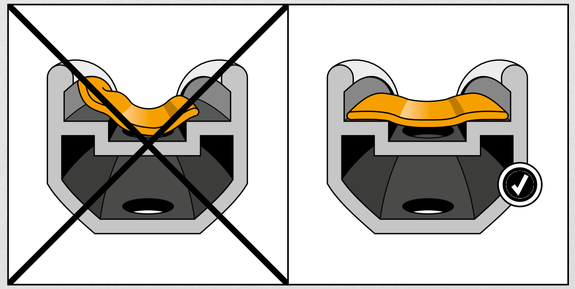


1 Check both rim and rim tape. Only use Tubeless ready rims. Ensure that the rim tape covers the rim well with at least two layers.

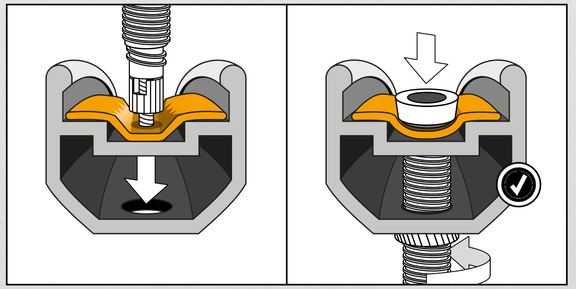


2 Mount the Tubeless valve first. Install it from the inside of the rim and tighten the nut. Press your finger on the rubber end of the valve to secure a better fit. Only tighten the nut by hand, do not use any tools.

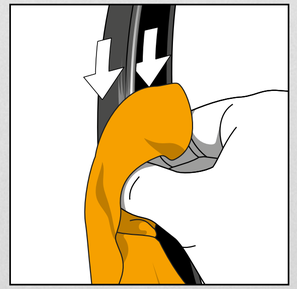

3 Before the initial inflation you can apply some soapy-water or a mounting pad on the contact points between tire and rim bed. This can help improve mounting the tire on the rim.

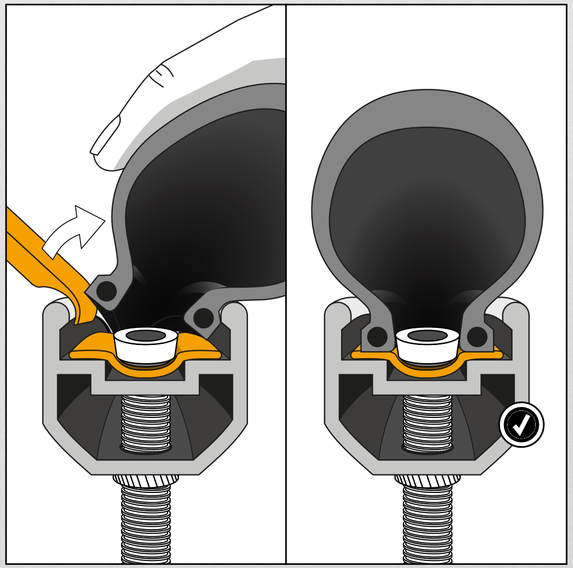


4 Mount the Tubeless tire on the rim in correct orientation of rotation. Ensure no loose pieces (e.g. sand, plastics) are found inside. Due to the tighter dimension tolerances of a Tubeless tire compared to a normal Clincher tire it may be helpful for you to use tire levers.

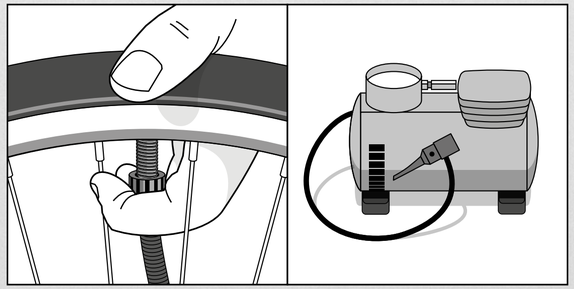


5 To fit the tire between the hooks, you may need a higher amount of air in the first instance. If you are using a floor pump, it is better to maintain a constant momentum within the first few seconds. A modern floor pump with a second inflatable cartridge can help to achieve this.


If a floor pump does not fill and accurately seat the tire, a compressor could help. You may need to adapt to the respective bicycle valve.



Please note, that the pressure in the size overview indicates the recommended pressure on the lower end and the maximum pressure on the upper end.

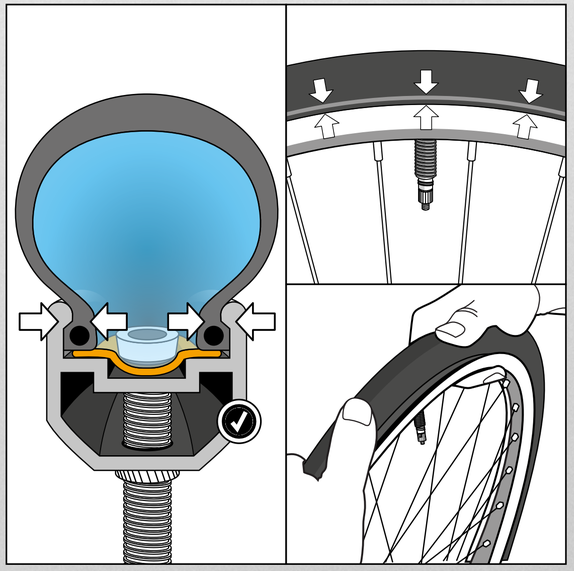

6 The correct fitting of the tire on the rim is mostly notable by a loud clicking noise. Check the air tightness of your Tubeless system. Does it lose any air? Check if the control line has an equal distance to the rim. If not release some air and work on the tire with both hands.

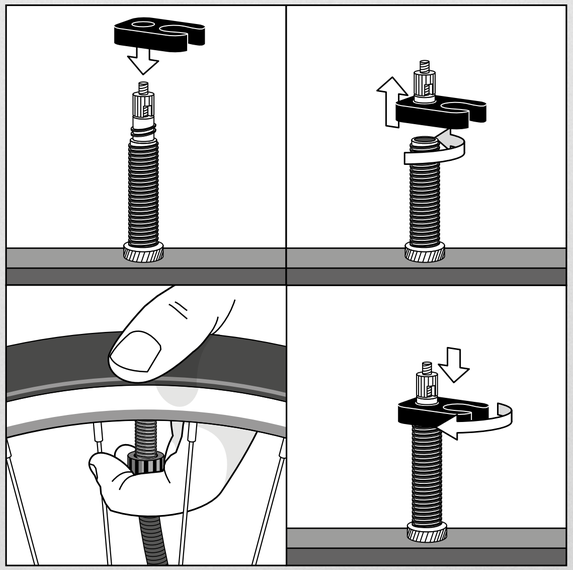


7 To enhance the air volume, unscrew the valve core. Pump it up and screw the valve core in again.



8 For the best puncture resistance, we recommend to fill approximately 30 - 60 ml of tire sealant through the valve. Considering it will dry over time, it is best to check and refill it every 3 - 6 months.

Important:
Do not insert the tire sealant with the valve at a 6 o'clock position! The valve should be located at the 5 or 7 o'clock position.

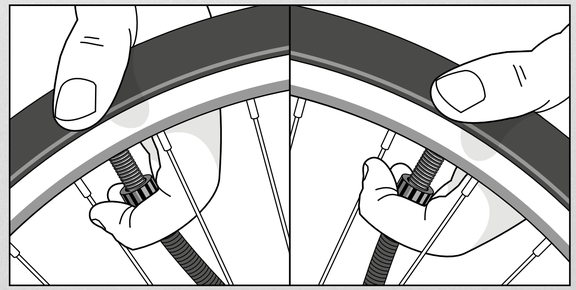

9 If you are using tire sealant: For inflation place the tire with the valve at the 11 or 1 o'clock position. Otherwise sealant could leak into the valve or put too much turbulence into it. It could dry faster or lock up the valve core.

Please be advised that the use of a CO2 cartridge can clump the sealant particles.



Continental Reifen Deutschland GmbH
Büttnerstraße 25
D-30165 Hannover

www.continental-tires.com/bicycle



Newsletter for
wholesale and retail
Subscribe here



Conti on Facebook



Conti on Instagram
Road



Conti on Instagram
MTB

Subject to technical changes.
No reliability for printer's error:
09/26 Barthelmay & Habedank Design GmbH.

Vectran™ is the registered trademark of Kuraray Co., Ltd.; Kevlar® is the registered trademark of E. I. du Pont de Nemours and Company.

© Copyright 2026 by
Continental Reifen Deutschland GmbH,
30165 Hannover, Germany

Continental
The Future in Motion