

Reduction in braking distance. Investment in safety.

ContiVanContact™ 200.

> Safe journey thanks to shorter braking distances on wet roads

Considerably reduced rolling resistance for lower fuel consumption and greater efficiency

> Safe handling in all situations, even under heavy loads



Optimised braking for increased safety.

Technical highlights.



Safe journey thanks to shorter braking distances on wet roads. New aqua grooves in the shoulder and sipes in the centre of the pattern create a windscreen wiper effect through the sipe edges. The result: vastly improved water dispersion for safe wet braking.





Considerably reduced rolling resistance for lower fuel consumption and greater efficiency. A full silica compound with specially adapted polymers leads to reduced energy loss during the deformation of the tyre thanks to strong binding of the polymer chains to the silica. The effect: reduced rolling resistance for higher efficiency.



Safe handling in all situations, even under heavy loads. Thanks to the macro block tread pattern, there is improved contact with the road, and the pattern stabilisers increase the stability and rigidity of the tread pattern. The result: optimum driving performance.

Tyre performance.



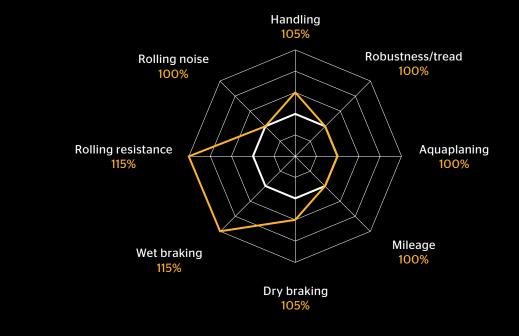

Tyre dimensions.

Tyre width in mm	Tyre cross section	Rim size in inches	Speed symbol	
195-235	Series 55-75	15-17	R/T/H/V	