



2015 · 2016

Technical Databook

Car › 4 x 4 › Van



This data book contains comprehensive information on our car, 4x4, LT (light truck) and van tyres.

The instructions and data given in this data book are valid for all tyre brands of Continental AG (see logos on the right), if not otherwise specified.

Instructions and data exclusively valid for the tyre brand Continental are specially marked or displayed on separate pages.



Tyre safety tips

The technical data and other details on tyres and accessories have been compiled to reflect as exactly and completely as possible the current state of development and are based on **ETRTO¹⁾**, **ISO²⁾**, **WdK** and **DIN³⁾** standards.

Most of the tyres of Continental AG comply with **DOT⁴⁾** regulations and are marked accordingly.

They are homologated in accordance with the relevant **UN/ECE⁵⁾** regulation (ZR tyres without service description in accordance with EU guideline 92/23).

This databook is intended for information and instruction only. No liability whatsoever will be accepted for damage, regardless of its nature and its legal basis, arising from advice given in this book.

We recommend that the **inflation pressure** of every tyre is **checked** and adjusted at least **every 14 days**. This does also apply for vehicles equipped with a tyre pressure monitoring system (TPMS). Avoid driving over sharp-edged or pointed objects.

Lower inflation pressures, greater loads or higher speeds than specified by the vehicle and/or tyre manufacturer all shorten the **service life** of tyres and can result in structural damages.

We recommended that **new tyres** are **run in** at moderate speeds for the first 120 to 190 miles (200 to 300 km) to roughen the tread surface. The tyre does not achieve its best performance until after this running-in period.

We recommend all wheel positions are fitted with tyres of the **same tread pattern**.

It is especially important that Continental SSR runflat tyres*) not be mixed with standard tyres.

Please observe the detailed operating instructions on [page 100 ff.](#)



SAFETY WARNING!

The instructions given in this databook must be observed to ensure vehicle safety at all times.

This applies especially with respect to tyre inflation pressure recommendations.

Non-compliance with these instructions means risking tyre damage which, if serious enough, may result in a tyre bursting. It is hazards like these that can cause traffic accidents involving vehicle damage and / or serious personal injury.

¹⁾ ETRTO - The European Tyre and Rim Technical Organisation, Brussels

²⁾ ISO - International Organization for Standardization

³⁾ DIN - German Institute for Standardisation, Berlin
WdK - German Rubber Manufacturers' Association, Frankfurt / M.

⁴⁾ DOT - Department of Transportation (USA)

⁵⁾ ECE - Economic Commission for Europe (UNO-Institution, Geneva)

^{*} only available for tyre brand Continental
[See page 23 for further details](#)

The content of this publication is provided for information only and without responsibility. Continental AG makes no representations about the accuracy, reliability, completeness or timeliness of the information in this publication. Continental AG may, in its sole discretion, revise the information contained herein at any time without notice.

Continental AG's obligations and responsibilities regarding its products are governed solely by the agreements under which they are sold. Unless otherwise agreed in writing, the information contained herein does not become part of these agreements. This publication does not contain any guarantee or agreed quality of Continental AG's products or any warranty of merchantability, fitness for a particular purpose and non-infringement. Continental AG may make changes in the products or services described at any time without notice.

This publication is provided on an "as is" basis. To the extent permitted by law, Continental AG makes no warranty, express or implied, and assumes no liability in connection with the use of the information contained in this publication. Continental AG is not liable for any direct, indirect, incidental, consequential or punitive damages arising out of the use of this publication. Information contained herein is not intended to announce product availability anywhere in the world.

The trademarks, service marks and logos (the Trademarks) displayed in this publication are the property of Continental and / or its affiliates. Nothing in this publication should be construed as granting any license or right to the Trademarks. Without the express written consent of Continental AG the use of the Trademarks is prohibited.

All text, images, graphics and other materials in this publication are subject to the copyright and other intellectual property rights of Continental AG and / or its affiliates. Continental AG owns the copyrights in the selection, coordination and arrangement of the materials in this publication. These materials may not be modified or copied for commercial use or distribution.

Copyright © 2015 Continental AG
All rights reserved.

TD C 07/2015

0130 1623

Introduction, Safety hints	2
Publisher's imprint	4
Tyre Sidewall Information	6
Service description (including Load Index and Speed Symbol)	8
Units of measurement and definitions of the technical data	9

Passenger car tyres

Continental brand tread patterns and recommended applications	
- Summer tyres	10
- Winter tyres	15
- 4 x 4 tyres	18
- SSR runflat tyres	23
- ContiSeal tyres	24
- ContiSilent technology	25
Technical data of all tyre brands of Continental	
- Car and 4 x 4	26
- LT 4 x 4	62
Special spare tyres	66
ContiComfortKit tyre emergency set	71

Van tyres


Continental brand tread patterns and recommended applications	72
Technical data of all tyre brands of Continental	76

Tyres for caravans and car drawn trailers (special load capacities)	88
Tube table	95
Car rims	96

Operating instructions

Correct choice of tyre and wheel	100
Winter tyres	100
Tread rubber brittleness influenced by temperature	101
Fitting the tyre	101
Fitting the wheel to the vehicle	103
Tyre pressure	103
Load capacity and speed	108
Tyre damage	110
Tyre Rotation on a vehicle	110
Tyre storage	112
Tyre repair	114
Tyre service life for passenger car and light truck	116
Minimum tread depth	117
Guidelines on tyre safety	118

Index	119
Service	121

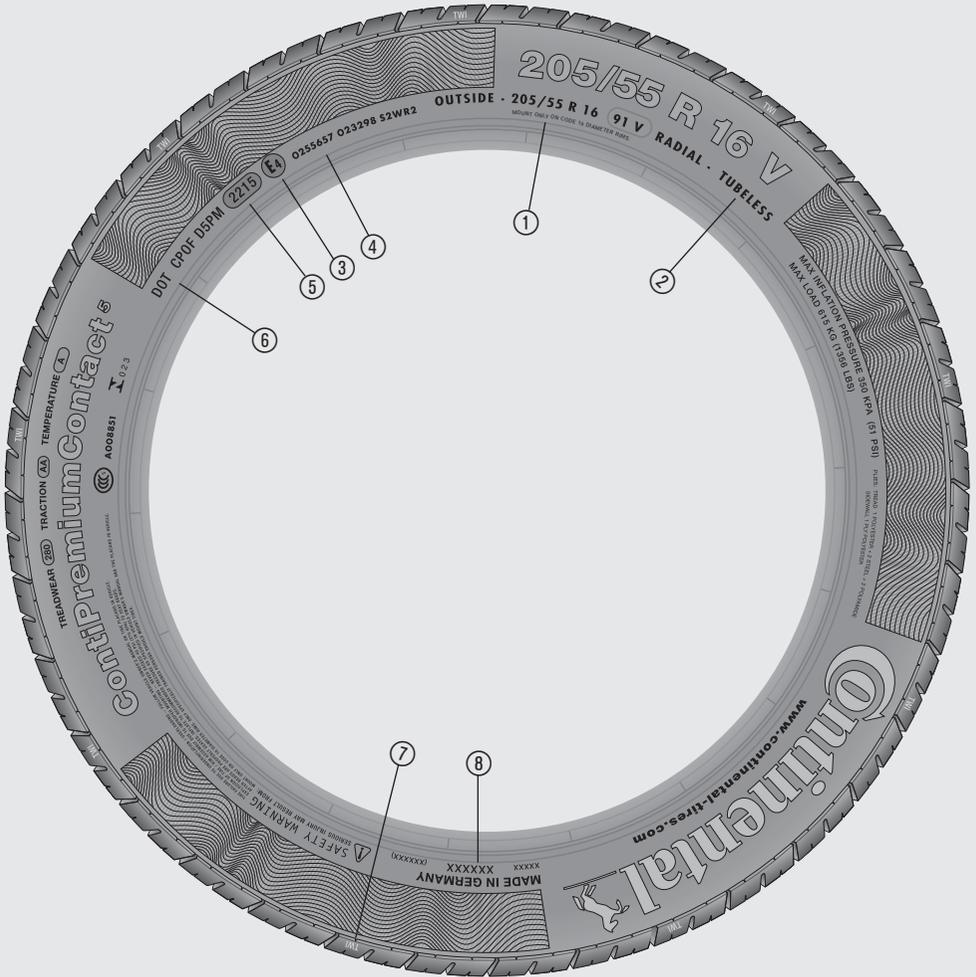

Example data for ContiPremiumContact 5 (tyre brand Continental). The specifications on a tyre sidewall are standardised and apply for other tyre brands accordingly.

- ① **205/55 R 16 91 V**
- 205** Nominal section width in mm.
- 55** Nominal aspect ratio
(Tyre height is 55 % of tyre width).
- R** Symbol for radial tyre
(or RF for run flat tyres).
- 16** Rim diameter code.
- 91** Load Index "91" = max. load of this tyre is 615 kg (see table page 8).
- V** Speed Symbol, indicating max. speed:
V=240 km/h / 150 mph (see table page 8).
- Other information may be added after the size marking:
"REINFORCED" or **"EXTRA LOAD (XL)"**
for reinforced tyres, **"M+S"** for winter tyres.
-  Snowflake designation: This additional marking on an M+S tyre shows that the tyre meets prescribed test criteria and ensures good winter properties.
- ② **TUBELESS** tubeless.
(TUBE TYPE tyres must be mounted with tubes).
- ③ **E 4** Marking indicating accordance with UN/ECE regulations. The number after the E in the circle indicates the country of homologation.  (4=Netherlands).
- ④ Approval number acc. to relevant UN/ECE regulation.
- ⑤ **2215** Production code ("22" means 22nd week "15" means 2015).
- ⑥ **DOT** DOT = Department of Transportation, USA.
- ⑦ **TWI** TWI = Tread Wear Indicator.
Cross ribs evenly spaced around the circumference of the tyre in the longitudinal tread grooves and becoming level with the tread surface when the remaining tread depth is down to 1.6 mm.
- ⑧ **Made in ...** Marking showing the country of origin.

Including Load Index and Speed Index

Load Index (LI)

The Load Index is a numerical code associated with the maximum load a tyre can carry (see also p. 104).

LI	kg	LI	kg	LI	kg	LI	kg	LI	kg
50	190	65	290	80	450	95	690	110	1060
51	195	66	300	81	462	96	710	111	1090
52	200	67	307	82	475	97	730	112	1120
53	206	68	315	83	487	98	750	113	1150
54	212	69	325	84	500	99	775	114	1180
55	218	70	335	85	515	100	800	115	1215
56	224	71	345	86	530	101	825	116	1250
57	230	72	355	87	545	102	850	117	1285
58	236	73	365	88	560	103	875	118	1320
59	243	74	375	89	580	104	900	119	1360
60	250	75	387	90	600	105	925	120	1400
61	257	76	400	91	615	106	950	121	1450
62	265	77	412	92	630	107	975	122	1500
63	272	78	425	93	650	108	1000	123	1550
64	280	79	437	94	670	109	1030	124	1600

Speed Symbol (SSY)

The Speed Symbol indicates the maximum speed at which the tyre can carry a load corresponding to its Load Index.

SI	Max. speed for passenger car tyres		SI	Reference speed for commercial vehicle tyres	
M	81 mph ¹⁾	130 km/h ¹⁾	K	69 mph	110 km/h
P	93 mph	150 km/h	L	75 mph	120 km/h
Q	100 mph	160 km/h	M	81 mph	130 km/h
R	106 mph	170 km/h	N	87 mph	140 km/h
S	112 mph	180 km/h	P	93 mph	150 km/h
T	118 mph	190 km/h	Q	100 mph	160 km/h
H	130 mph	210 km/h	R	106 mph	170 km/h
V	150 mph	240 km/h	S	112 mph	180 km/h
W	169 mph	270 km/h	T	118 mph	190 km/h
Y	187 mph	300 km/h	H	130 mph	210 km/h
(...Y)	over 187 mph ²⁾	over 300 km/h ²⁾			
ZR	over 150 mph	over 240 km/h			

¹⁾ As a rule only used for special spare tyres if they qualify according to UN/ECE Regulation 30. In accordance with UN/ECE Regulation 64 governing the use of special spare tyres, even higher speed rated tyres may only be used up to a maximum speed of 50 mph (80 km/h).

²⁾ See page 109, table 4 for details.

The technical data in the tables comply generally with international standards.

All **dimensions** in the tables of this databook are given in millimetres (mm), if not indicated in a different way.

The **rim diameter** is given in inch code. Tyre ranges on new rim types may also be marked in mm.

Construction measurements are theoretical values for the design of the tyre: The **width** is relative to the smooth sidewall, the **outer diameter** to the tread centre.

Maximum measurements are actual **operating measurements** of the inflated tyre (operating pressure) in the unloaded state. They include growth but exclude dynamic distortions.

The **width** is the max. permitted tyre width, including sidewall decorative markings, when the tyre is mounted on the correct rim.

The **outer diameter** is the max. permitted diameter. The max. measurements are binding for **vehicle designers**.

The **static radius** is the distance between the wheel centre and the ground contact patch under max. load at the recommended tyre pressure.

The **rolling circumference** is the distance covered by a point on the circumference when the tyre revolves once at 60 km/h (37 mph).




The **load capacity** is indicated in kilograms (kg).

Tyre pressure (inflation pressure) is given in bar as an overpressure (cold tyre), for driving speeds to **160 km/h (100 mph)**.

Vehicle designers should bear in mind the **maximum values** for tyre outer diameter and width when planning the **wheel space of a vehicle**, if all standard approved tyres are to fit without any restrictions.

Standard sizes

Flotation sizes (4x4)

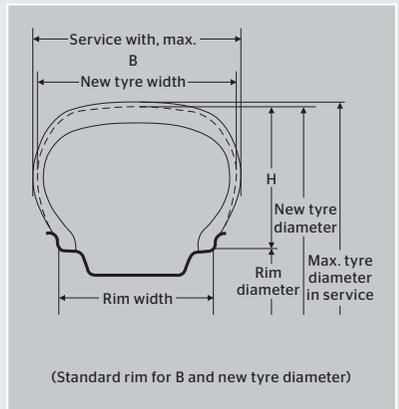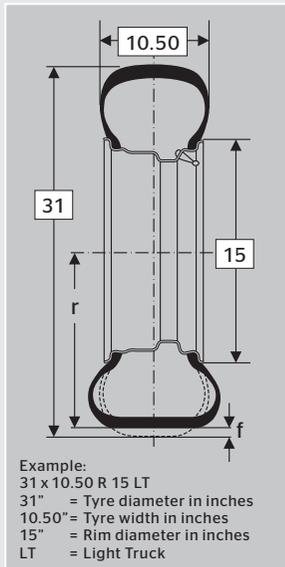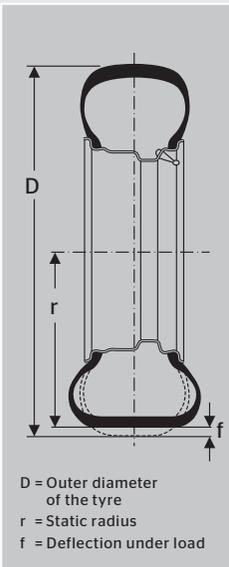

SportContact 6

NEW

The thrill of perfect grip

- › Maximum grip for shorter braking distance, ultimate acceleration and cornering
- › Maximum control even with small steering movements and through cornering stability at the limit
- › Maximum stability for speeds up to 350 km/h (218 mph)

Tyre dimensions^{*)}

- › Tyre width 225-335 mm
- › Rim size 19-23 inch
- › Speed Symbol (ZR) Y
- › Tyre cross-section series 25-40



Front axle



Rear axle

ContiSportContact™ 5P / SUV

For sporty vehicles and SUVs

- › Optimised for the different demands on the front and rear axles
- › Improved grip and stability when cornering, sporty handling
- › Short stopping distances particularly in the wet

Also available as SSR runflat tyre and with noise reducing ContiSilent™ technology. [See page 23 / 25 for further details.](#)

Tyre dimensions^{*)}

- › Tyre width 225-335 mm
- › Rim size 18-23 inch
- › Speed Symbol Y / (Y) ZR
- › Tyre cross-section series 25-45



Front axle **) / all wheel positions



Rear axle^{**)}

ContiSportContact™ 5P

^{**) Special tyres for front and rear axle offer maximum safety and driving pleasure. The "P" in the product name stands for the additional sporty performance.}

Additional safety feature in the tread design: summer TWI informs the driver when the remaining tyre tread is 3 mm.

ContiSportContact™ 5 / SUV

For high-performance and luxury vehicles

- › Adaptive Black Chili technology compound
- › Adapts tyres to driving situation
- › Very high safety margin, particularly when braking on wet surfaces

Also available as SSR runflat tyre, ContiSeal™ tyre and with noise reducing ContiSilent™ technology.

[See page 23-25 for further details.](#)

Tyre dimensions *)

- › Tyre width 205-315 mm
- › Rim size 17-22 inch
- › Speed Symbol H / V / W / Y / (Y) ZR
- › Tyre cross-section series 30-65



ContiSportContact™ 3

Developed for high-performance vehicles

- › Asymmetric tread pattern
- › Excellent protection against aquaplaning
- › Excellent safety for sporty driving

Also available as SSR runflat tyre and ContiSeal™ tyre.

[See page 23 /24 for further details.](#)

Tyre dimensions *)

- › Tyre width 195-295 mm
- › Rim size 16-22 inch
- › Speed Symbol V / W / Y / (Y) / Z
- › Tyre cross-section series 30-55



ContiPremiumContact™ 5

For mid-sized and executive class vehicles

- › 3D profile edges combined with sipe system technology
- › Prevents curling-in when braking and results in an even braking distribution
- › Shorter braking distances, especially on wet roads

Also available as ContiSeal™ tyre.

[See page 24 for further details.](#)

Tyre dimensions *)

- › Tyre width 165-235 mm
- › Rim size 14-17 inch
- › Speed Symbol T / H / V / W / Y
- › Tyre cross-section series 50-70



ContiPremiumContact™ 2

For upmarket mid-sized and luxury vehicles

- › Innovative 3D tread grooves
- › Exceptionally precise steering and very high driving stability, excellent protection against aquaplaning
- › Excellent braking performance in dry and wet conditions

Also available as SSR runflat tyre and ContiSeal™ tyre.

[See page 23 /24 for further details.](#)

Tyre dimensions *)

- › Tyre width 155-245 mm
- › Rim size 14-18 inch
- › Speed Symbol T / H / V / W / Y
- › Tyre cross-section series 40-70



ContiEcoContact™ 5

Developed for mid-sized and compact class vehicles

- › Flat contour and optimised sidewall structure
- › Optimised flexibility of tyre when in motion and reduced energy loss
- › Lower fuel consumption and higher mileage

Also available as SSR runflat tyre and ContiSeal™ tyre.

[See page 23 /24 for further details.](#)

Tyre dimensions *)

- › Tyre width 165-235 mm
- › Rim size 13-19 inch
- › Speed Symbol T / H / V / W / Y
- › Tyre cross-section series 45-70



ContiEcoContact™ 3

For compact class vehicles

- › Flexible silica compound with high dynamic stiffness and new polymer concept
- › Tyre interlocks better with road surface, lower rolling resistance
- › Excellent traction on wet and dry roads, lower fuel consumption

Tyre dimensions *)

- › Tyre width 145-195 mm
- › Rim size 13-15 inch
- › Speed Symbol T / H
- › Tyre cross-section series 55-80



Conti.eContact™

For electric vehicles in compact class

- › New pattern design and more flexible sidewall area
- › Less energy loss when deflecting or rebounding and optimised rolling resistance
- › Reduced noise emissions and good handling performance



Conti.eContact™

For hybrid vehicles in luxury and mid-sized class

- › Green Chili compound and Hydro Sipes
- › Reduced rolling resistance
- › Better braking performance in the wet and excellent handling and safety

Tyre dimensions *)

- › Tyre width 215-255 mm
- › Rim size 17-18 inch
- › Speed Symbol V-W
- › Tyre cross-section series 50-60



WinterContact™ TS 850 P/SUV

For mid-sized and executive class vehicles and SUVs

- › Enhanced snow traction given by the S-GRIP pattern layout
- › Improved handling on snow due to PrecisionPlus
- › Better dry handling performance thanks to PowerSipes
- › Reduced stopping distances via ActiveBand

Also available as SSR runflat tyre and ContiSeal™ tyre.

See [page 23/24](#) for further details.

Tyre dimensions *)

- › Tyre width 155-275 mm
- › Rim size 16-20 inch
- › Speed Symbol T/H/V/W
- › Tyre cross-section series 35-70



M+S



ContiWinterContact™ TS 850

For compact and medium range vehicles

- › Improved braking performance on snow, ice and wet roads
- › Excellent driving stability in all winter conditions
- › More economical thanks to reduced rolling resistance and increased mileage

Also available as ContiSeal™ tyre.

See [page 24](#) for further details.

Tyre dimensions *)

- › Tyre width 155-225 mm
- › Rim size 14-17 inch
- › Speed Symbol T/H/V
- › Tyre cross-section series 45-80



M+S



Snowflake designation:

This additional marking on an M+S tyre shows that the tyre meets prescribed test criteria and ensures good winter properties.

ContiWinterContact™ TS 800

For compact range vehicles

- › Superb cornering stability and grip
- › Excellent performance on snow and ice
- › Outstanding protection against aquaplaning

Tyre dimensions *)

- › Tyre width 125-195 mm
- › Rim size 13-15 inch
- › Speed Symbol Q / T
- › Tyre cross-section series 50-80



M+S



ContiWinterContact™ TS 830 P

For high-performance vehicles and SUVs

- › Exceptional braking power on snow, ice and wet roads
- › Better snow traction
- › Higher mileage

Also available as SSR runflat tyre and ContiSeal™ tyre.

See page 23 / 24 for further details.

Tyre dimensions *)

- › Tyre width 195-295 mm
- › Rim size 15-20 inch
- › Speed Symbol T / H / V / W
- › Tyre cross-section series 30-65



M+S



Profilveriante (BMW, MB)

ContiWinterContact™ TS 810 Sport

For powerful medium range and luxury vehicles

- › Outstanding performance in all winter conditions
- › Superb handling and braking on dry roads
- › Excellent aquaplaning safety

Also available as SSR runflat tyre.

[See page 23 for further details.](#)

Tyre dimensions *)

- › Tyre width 175-285 mm
- › Rim size 15-19 inch
- › Speed Symbol T / H / V / W
- › Tyre cross-section series 35-65



M+S



Snowflake designation:

This additional marking on an M+S tyre shows that the tyre meets prescribed test criteria and ensures good winter properties.

CrossContact™ UHP

For sporty SUVs

- › Low rolling resistance and excellent grip
- › Shorter braking distances and high stability on bends
- › Safety margins for excellent handling and driving pleasure

Also available as SSR runflat tyre.

[See page 23 for further details.](#)

Tyre dimensions *)

- › Tyre width 215–315 mm
- › Rim size 16–23 inch
- › Speed Symbol T / H / V / W / Y / (Y) ZR
- › Tyre cross-section series 30–65



ContiCrossContact™ LX 2

For SUVs and off-road vehicles

- › Solidly designed central pattern area, continuously closed shoulder pattern and high number of sipes
- › High pattern stiffness and increased grip due to improved water displacement
- › Excellent handling and outstanding short braking distances on dry and wet road surfaces

Tyre dimensions *)

- › Tyre width 205–285 mm
- › Rim size 15–18, 20 inch
- › Speed Symbol S / T / H / V
- › Tyre cross-section series 50–82



ContiCrossContact™ LX

For SUVs and off-road vehicles

- › Wide outside shoulder with wide lateral grooves
- › Excellent cornering stability, traction and off-road look
- › Good driving and braking performance, even in light off-road use

Tyre dimensions *)

- › Tyre width 195-265 mm
- › Rim size 16-18 inch
- › Speed Symbol S / T / H / V
- › Tyre cross-section series 60-70



ContiCrossContact™ LX Sport

For SUVs and off-road vehicles

- › Stiff intermediate block rolls
- › Enhanced force transmission improves dry traction and dry handling performance
- › Outstanding handling performance on-road and in light off-road conditions

Also available as SSR runflat tyre and with noise reducing ContiSilent™ technology.

[See page 23 /25 for further details.](#)

Tyre dimensions *)

- › Tyre width 215-315 mm
- › Rim size 16-22 inch
- › Speed Symbol T / H / V / W / Y
- › Tyre cross-section series 40-70



4x4Contact™

For SUVs and off-road vehicles

- › Wide grooves in longitudinal and lateral directions
- › Rapid water absorption and water displacement
- › High aquaplaning protection

Tyre dimensions *)

- › Tyre width 185-275 mm
- › Rim size 15-20 inch
- › Speed Symbol S/T/H/V
- › Tyre cross-section series 45-80



ContiCrossContact™ AT

For off-road vehicles

- › Aggressive open pattern design
- › Traction and off-road look
- › Very good performance on off-road terrain

Tyre dimensions *)

- › Tyre width 205-275 mm
- › Rim size 15-18 inch
- › Speed Symbol S/T/H
- › Tyre cross-section series 60-85



ContiCrossContact™ Winter

For SUVs and off-road vehicles

- › Excellent traction and braking performance on snow-covered and wet roads
- › High protection against aquaplaning
- › Quiet ride and low rolling resistance

Tyre dimensions^{*)}

- › Tyre width 175-295 mm
- › Rim size 15-22 inch
- › Speed Symbol Q/T/H/V
- › Tyre cross-section series 35-85



M+S



Snowflake designation:

This additional marking on an M+S tyre shows that the tyre meets prescribed test criteria and ensures good winter properties.

Conti4x4WinterContact™

For SUVs and off-road vehicles

- › Excellent traction and braking performance on snow-covered and wet roads
- › Excellent driving comfort and quiet ride
- › High protection against aquaplaning

Also available as SSR runflat tyre.

[See page 23 for further details.](#)

Tyre dimensions *)

- › Tyre width 215-275 mm
- › Rim size 17+18 inch
- › Speed Symbol H
- › Tyre cross-section series 55-65



M+S



Snowflake designation:

This additional marking on an M+S tyre shows that the tyre meets prescribed test criteria and ensures good winter properties.

The SSR tyres from Continental – advanced runflat technology.




- › Reduced danger and hassle
- › Drive to safety for up to 80 kilometres of 80 km/h
- › Compatible with standard wheel rims (H 2)
- › No need for a spare wheel and jack

The secret of SSR.

Continental's SSR tyres use reinforced sidewalls to support the vehicle in the event of a loss of air pressure.

SSR technology prevents the side of the flat tyre from being crushed between the road and wheel rim.

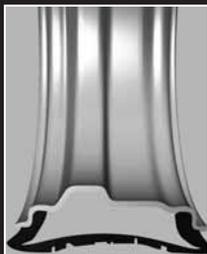

Standard tyres

The deflated tyre gets trapped beneath the rim and is destroyed.



SSR runflat tyres

The stable sidewalls support the tyre if it loses air.

Increased safety thanks to reinforced sidewalls.

SSR tyres allow for a controlled continuation of your journey at a reduced speed of up to a distance of 80 km at a maximum speed of 80 km/h depending on the condition of the roads, the condition of the tyre and the weight of the vehicle.

Communication between tyre and driver.

As SSR tyres offer a very high standard of driving comfort, the driver will barely notice any loss of pressure in the tyre. For this reason, Continental SSR tyres may only be used on vehicles equipped with a tyre pressure monitoring system, which will display the drop in tyre pressure on the dashbord instrument panel.

Note:

SSR tyres may only be fitted on vehicles for which they are approved by the vehicle manufacturer and that are equipped with a tyre pressure monitoring system.

The brochure "SSR Runflat Tyres - Important information for drivers" contains important details about using SSR runflat tyres.

The tread patterns and sizes available as SSR runflat tyre can be found in the current product range of summer and winter passenger tyres.

As dealer, you need to get training and certification for the professional mounting and removal of SSR tyres under www.conti-ssr.co.uk - see also www.conti-ssr.com

(SSR training, product information and certificate).

ContiSeal™ – the self-sealing standard production tyre from Continental.

For enhanced mobility and safety, even if a foreign object penetrates the tyre tread.

ContiSeal tyres contain an innovative technology which seals punctures in the tread area. ContiSeal tyres have a sticky, viscous layer from shoulder to shoulder that instantly seals punctures caused by nails and other objects up to 5 mm in diameter. The layer temporarily seals the vast majority of tyre tread punctures.

The material in the sealant layer prevents air loss even if the penetrating object becomes dislodged. As a result there is no need to stop straight away or change the tyre immediately in the event of a puncture. Despite this, the tyre should be taken as soon as possible to a tyre specialist who can examine it to determine if it needs a permanent repair.

ContiSeal tyres are instantly recognisable by the nail symbol on the sidewall and are compatible with all commonly available wheel rims.

ContiSeal tyres – the benefits at a glance:

- › punctures in the tread area caused by penetrating objects up to 5 mm in diameter are sealed
- › holes are sealed even if the penetrating object becomes dislodged
- › same high performance under normal driving conditions as non ContiSeal tyres
- › no need to stop straight away or change the tyre

For detailed information about ContiSeal tyres – use, inspection, storing, mouting / demounting, repair, disposal – please see www.contiseal.com



ContiSilent™ – the tyre for less interior noise.



- › Reduced interior noise on all road surfaces
- › ContiSilent functions in all weather conditions
- › No change in any other driving performance characteristics
- › No negative influence on mileage and load / speed capability
- › Same mounting and storage as for standard tyres

Technical highlights.

ContiSilent is a tyre noise-reducing technology developed by Continental. It is designed to reduce interior noise on all road surfaces.

ContiSilent tyres are equipped with an inner tyre absorber, a polyurethane foam, attached to the inner surface of the tread area with an adhesive. Regardless of the temperature, the structure of the foam stays intact.

ContiSilent helps reduce interior vehicle noise up to 9 dB(A), depending on the type of vehicle, its speed and the road surface. At the moment it is available for summer tyres and is compatible with all commonly available rims. Driving performance is not affected and there is no negative influence on mileage and load / speed capability. Fitting on four positions is recommended.

ContiSilent™ principle.


ContiSilent tyre.

A ContiSilent tyre contains a polyurethane foam. It is firmly attached to an adhesive layer on the inner surface of the tyre tread area.



Interior noise.

Even while driving at high speeds, the ContiSilent tyre reduces road noise inside the vehicle by up to 9 dB (A). The level of reduction of interior noise depends on the type of vehicle, its speed and the road surface.

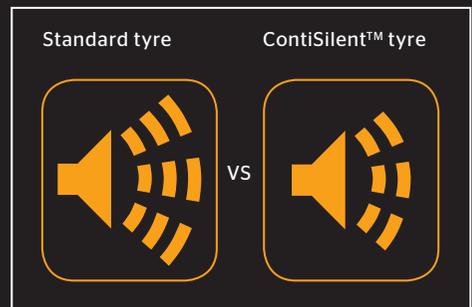

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)	
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)			
82 / 80 series								
175 R 13	86	530	4.50 B ⁴⁾	179				
			5.00 B ⁴⁾	184	622	274	1861	
			5.50 B ⁴⁾	189				
			6.00 B ⁴⁾	194				
125/80 R 13	65	290	3.00 B ⁴⁾	126				
			3.50 B ⁴⁾	131	538	243	1617	
			4.00 B ⁴⁾	136				
135/80 R 13	70	335	3.50 B ⁴⁾	138	554	249	1665	
			4.00 B ⁴⁾	143				
			4.50 B ⁴⁾	148				
145/80 R 13	75	387	3.50 B ⁴⁾	146				
			4.00 B ⁴⁾	151	572	256	1714	
			4.50 B ⁴⁾	156				
			5 J	161				
155/80 R 13	79	437	4.00 B ⁴⁾	158				
155/80 R 13 XL	83	487	4.50 B ⁴⁾	163	588	262	1763	
			5.00 B ⁴⁾	168				
165/80 R 13	83	487	4.00 B ⁴⁾	167				
165/80 R 13 XL	87	545	4.50 B ⁴⁾	172	604	268	1812	
			5.00 B ⁴⁾	177				
			5.50 B ⁴⁾	182				
145/80 R 14	76	400	3.50 B ⁴⁾	146				
			4.00 B ⁴⁾	151	598	268	1793	
			4.50 B ⁴⁾	156				
			5.00 B ⁴⁾	161				
165/80 R 14	85	515	4 J	167				
			4 ½ J	172	630	281	1891	
			5 J	177				
			5 ½ J	182				
175/80 R 14	88	560	4 ½ J	179				
			5 J	184	648	287	1940	
			5 ½ J	189				
			6 J	194				
185/80 R 14	91	615	4 ½ J	186				
			5 J	191	664	293	1989	
			5 ½ J	196				
165/80 R 15	87	545	6 J	201				
			4 J	167				
			4 ½ J	172	655	293	1967	
			5 J	177				
			5 ½ J	182				

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
82 / 80 series							
195/80 R 15	96	710	5 J	199			
			5 ½ J	204	705	312	2114
			6 J	209			
			6 ½ J	214			
215/80 R 15	102	850	5 ½ J	220			
			6 J	225	739	325	2211
			6 ½ J	230			
			7 J	235			
205/80 R 16 XL / Rf.	104	900	5 J	206			
			5 ½ J	211	748	331	2239
			6 J	216			
			6 ½ J	221			
			7 J	226			
75 series							
205/75 R 15	97	730	5 J	206			
			5 ½ J	211	701	310	2101
			6 J	216			
			6 ½ J	221			
			7 J	226			
215/75 R 15	100	800	5 ½ J	220			
			6 J	225	715	316	2144
			6 ½ J	230			
			7 J	235			
225/75 R 15	102	850	6 J	232	733	322	2193
			6 ½ J	237			
			7 J	242			
			7 ½ J	247			
P 235/75 R 15	105	925	6 J	239			
235/75 R 15 XL	109	1030	6 ½ J	244	747	328	2236
			7 J	249			
			7 ½ J	254			
			8 J	259			
265/75 R 15	112	1120	7 J	273			
			7 ½ J	278	795	346	2376
			8 J	283			
			8 ½ J	288			
			9 J	293			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
75 series							
215/75 R 16 XL	107	975	5 ½ J	220			
			6 J	225	740	329	2220
			6 ½ J	230			
			7 J	235			
225/75 R 16	104	900	6 J	232	758	335	2269
225/75 R 16 XL	108	1000	6 ½ J	237			
			7 J	242			
			7 ½ J	247			
P 235/75 R 16	106	950	6 J	239			
235/75 R 16	108	1000	6 ½ J	244	772	341	2312
			7 J	249			
			7 ½ J	254			
235/75 R 16 XL	112	1120	8 J	259			
			7 J	249			
			7 ½ J	254			
245/75 R 16	111	1090	8 J	259			
			6 ½ J	253			
			7 J	258	788	347	2361
245/75 R 16	111	1090	7 ½ J	263			
			8 J	268			
			7 J	273			
265/75 R 16	116	1250	7 ½ J	278	820	358	2452
			8 J	283			
			8 ½ J	288			
			9 J	293			
			7 J	273			
235/75 R 17	109	1030	6 J	239			
			6 ½ J	244	798	353	2391
			7 J	249			
			7 ½ J	254			
			8 J	259			
70 series							
135/70 R 13	68	315	3.50 B ⁴⁾	139			
			4.00 B ⁴⁾	144	528	239	1586
			4.50 B ⁴⁾	149			
145/70 R 13	71	345	3.50 B ⁴⁾	146			
			4.00 B ⁴⁾	151			
			4.50 B ⁴⁾	156	542	244	1629
			5.00 B ⁴⁾	161			
155/70 R 13	75	387	4.00 B ⁴⁾	158			
			4.50 B ⁴⁾	163	556	250	1671
			5.00 B ⁴⁾	168			
165/70 R 13	79	437	4.00 B ⁴⁾	167			
165/70 R 13 XL / Rf.	83	487	4.50 B ⁴⁾	172			
			5.00 B ⁴⁾	177	572	255	1714
			5.50 B ⁴⁾	182			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
70 series							
175/70 R 13	82	475	4.50 B ⁴⁾	179			
175/70 R 13 XL	86	530	5.00 B ⁴⁾	184	586	261	1757
			5.50 B ⁴⁾	189			
			6.00 B ⁴⁾	194			
185/70 R 13	86	530	4.50 B ⁴⁾	187			
			5.00 B ⁴⁾	192			
			5.50 B ⁴⁾	197	600	266	1800
155/70 R 14	77	412	4.00 B ⁴⁾	158			
			4.50 B ⁴⁾	163	582	262	1751
			5.00 B ⁴⁾	168			
165/70 R 14	81	462	4 J	167			
165/70 R 14 XL / Rf.	85	515	4.50 B ⁴⁾	172			
			5.00 B ⁴⁾	177	598	268	1793
			5.50 B ⁴⁾	182			
175/70 R 14	84	500	4 ½ J	179			
175/70 R 14 XL	88	560	5.00 B ⁴⁾	184	612	273	1836
			5.50 B ⁴⁾	189			
			6 J	194			
185/70 R 14	88	560	4 ½ J	187			
185/70 R 14 XL	92	630	5 J	192			
			5 ½ J	197	626	279	1879
			6 J	202			
195/70 R 14	91	615	5 J	199			
			5 ½ J	204	640	284	1922
			6 J	209			
6 ½ J	214						
205/70 R 14	95	690	5 J	207			
205/70 R 14 XL	98	750	5 ½ J	212			
			6 J	217	656	290	1964
			6 ½ J	222			
			7 J	227			
135/70 R 15	70	335	3 ½ J	139			
135/70 R 15	70	335	4 J	144	579	264	1742
			4 ½ J	149			
			5 J	158			
155/70 R 15	78	425	4 ½ J	163	607	275	1827
			5 J	168			
			6 J	177			
195/70 R 15 Rf.	97	730	5 J	199			
			5 ½ J	204			
			6 J	209	665	297	1998
			6 ½ J	214			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
70 series							
205/70 R 15	96	710	5 J	207			
			5 ½ J	212			
			6 J	217	681	302	2040
			6 ½ J	222			
			7 J	227			
215/70 R 15	98	750	5 ½ J	220			
			6 J	225			
			6 ½ J	230	695	308	2083
			7 J	235			
225/70 R 15	100	800	6 J	232			
P 225/70 R 15			6 ½ J	237	709	313	2126
			7 J	242			
			7 ½ J	247			
235/70 R 15	103	875	6 J	240			
P 235/70 R 15			6 ½ J	245			
			7 J	250	725	319	2169
			7 ½ J	255			
			8 J	260			
255/70 R 15	108	1000	6 ½ J	260			
			7 J	265			
			7 ½ J	270	753	330	2254
			8 J	275			
			8 ½ J	280			
265/70 R 15	112	1120	7 J	273			
			7 ½ J	278			
			8 J	283	767	335	2297
			8 ½ J	288			
			9 J	293			
195/70 R 16	94	670	5 J	199			
			5 ½ J	204			
			6 J	209	690	310	2074
			6 ½ J	214			
205/70 R 16	97	730	5 J	207			
			5 ½ J	212			
			6 J	217	706	315	2117
			6 ½ J	222			
			7 J	227			
P 215/70 R 16	99	775	5 ½ J	220			
215/70 R 16	100	800	6 J	225			
			6 ½ J	230	720	321	2159
			7 J	235			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
70 series							
225/70 R 16	102	850	6 J	232			
	103	875	6 ½ J	237	734	326	2202
225/70 R 16 XL	107	975	7 J	242			
			7 ½ J	247			
P 235/70 R 16	104	900	6 J	240			
235/70 R 16	105	925	6 ½ J	245			
			7 J	250	750	332	2245
			7 ½ J	255			
	8 J	260					
245/70 R 16	107	975	6 ½ J	253			
245/70 R 16 XL	111	1090	7 J	258	764	337	2288
			7 ½ J	263			
			8 J	268			
255/70 R 16	111	1090	6 ½ J	260			
			7 J	265			
			7 ½ J	270	778	342	2330
			8 J	275			
			8 ½ J	280			
265/70 R 16	112	1120	7 J	273			
			7 ½ J	278			
	114	1180	8 J	283	792	348	2373
			8 ½ J	288			
			9 J	293			
275/70 R 16	114	1180	7 J	280			
			7 ½ J	285			
			8 J	290	808	353	2416
			8 ½ J	295			
			9 J	300			
225/70 R 17 XL	108	1000	6 J	232			
			6 ½ J	237	760	339	2281
			7 J	242			
			7 ½ J	247			
235/70 R 17 XL	111	1090	6 J	240			
			6 ½ J	245			
			7 J	250	776	344	2325
			7 ½ J	255			
			8 J	260			
P 245/70 R 17	108	1000	6 ½ J	253			
245/70 R 17	110	1060	7 J	258	790	350	2367
			7 ½ J	263			
			8 J	268			
P 255/70 R 17	110	1060	6 ½ J	260			
255/70 R 17	112	1120	7 J	265			
			7 ½ J	270	804	355	2410
			8 J	275			
			8 ½ J	280			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)	
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)			
70 series								
P 265/70 R 17	113	1150	7 J	273				
265/70 R 17	115	1215	7 ½ J	278				
			8 J	283	818	361	2452	
			8 ½ J	288				
			9 J	293				
265/70 R 18	116	1250	7 J	273				
			7 ½ J	278				
			8 J	283	843	373	2528	
			8 ½ J	288				
			9 J	293				
65 series								
155/65 R 13	73	365	4.50 B ⁴⁾	163	540	244	1623	
			5.00 B ⁴⁾	168				
			5.50 B ⁴⁾	173				
165/65 R 13	77	412	4.50 B ⁴⁾	172				
			5.00 B ⁴⁾	177	552	249	1659	
			5.50 B ⁴⁾	182				
			6.00 B ⁴⁾	187				
175/65 R 13	80	450	5.00 B ⁴⁾	184	568	254	1702	
			5.50 B ⁴⁾	189				
			6.00 B ⁴⁾	194				
155/65 R 14	75	387	4.50 B ⁴⁾	163	566	256	1702	
			5.00 B ⁴⁾	168				
			5.50 B ⁴⁾	173				
165/65 R 14	79	437	4.50 B ⁴⁾	172				
			5.00 B ⁴⁾	177	578	261	1739	
			5.50 B ⁴⁾	182				
			6 J	187				
175/65 R 14	82	475	5.00 B ⁴⁾	184	594	267	1781	
175/65 R 14 XL / Rf.	86	530	5.50 B ⁴⁾	189				
			6 J	194				
185/65 R 14	86	530	5 J	192				
185/65 R 14 XL	90	600	5 ½ J	197	606	272	1818	
			6 J	202				
			6 ½ J	207				
195/65 R 14	89	580	5 ½ J	204				
			6 J	209	620	277	1861	
			6 ½ J	214				
			7 J	219				

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
65 series							
145/65 R 15	72	355	4 J	151			
			4 ½ J	156	577	264	1735
155/65 R 15	77	412	4 ½ J	163	591	269	1778
			5 J	161			
			5 ½ J	168			
165/65 R 15	81	462	4 ½ J	172			
			5 J	177	603	274	1815
			5 ½ J	182			
			6 J	187			
175/65 R 15	84	500	5 J	184	619	279	1857
175/65 R 15 XL	88	560	5 ½ J	189			
			6 J	194			
185/65 R 15	88	560	5 J	192			
185/65 R 15 XL / Rf.	92	630	5 ½ J	197	631	284	1894
			6 J	202			
			6 ½ J	207			
195/65 R 15	91	615	5 ½ J	204			
195/65 R 15 XL / Rf.	95	690	6 J	209	645	289	1937
			6 ½ J	214			
			7 J	219			
205/65 R 15	94	670	5 ½ J	212			
205/65 R 15 XL / Rf.	99	775	6 J	217	657	294	1973
			6 ½ J	222			
			7 J	227			
			7 ½ J	232			
215/65 R 15	96	710	6 J	225			
215/65 R 15 Rf.	100	800	6 ½ J	230	673	300	2016
			7 J	235			
			7 ½ J	240			
195/65 R 16	92	630	5 ½ J	204			
			6 J	209	670	302	2013
			6 ½ J	214			
			7 J	219			
215/65 R 16	98	750	6 J	225			
215/65 R 16 XL	102	850	6 ½ J	230	698	312	2092
			7 J	235			
			7 ½ J	240			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
65 series							
235/65 R 16	103	875	6 ½ J	245			
			7 J	250	724	322	2172
			7 ½ J	255			
			8 J	260			
255/65 R 16	109	1030	8 ½ J	265			
			7 J	265			
			7 ½ J	270	752	332	2251
			8 J	275			
215/65 R 17	98	750	8 ½ J	280			
			9 J	285			
			6 J	225			
			6 ½ J	230	724	325	2172
225/65 R 17	99	775	7 J	235			
			7 ½ J	240			
225/65 R 17	102	850	8 J	242			
225/65 R 17 XL	106	950	6 ½ J	237	736	330	2208
			7 J	242			
			7 ½ J	247			
			8 J	252			
235/65 R 17	103	875	6 ½ J	245			
	104	900	7 J	250	750	335	2251
235/65 R 17 XL	108	1000	7 ½ J	255			
			8 J	260			
			8 ½ J	265			
245/65 R 17	107	975	7 J	258	762	340	2288
245/65 R 17 XL	111	1090	7 ½ J	263			
			8 J	268			
			8 ½ J	273			
255/65 R 17	110	1060	7 J	265			
255/65 R 17 XL	114	1180	7 ½ J	270	778	345	2330
			8 J	275			
			8 ½ J	280			
			9 J	285			
265/65 R 17	112	1120	7 ½ J	278			
265/65 R 17 XL	116	1250	8 J	283	790	350	2367
			8 ½ J	288			
			9 J	293			
			9 ½ J	298			
275/65 R 17	115	1215	7 ½ J	285			
			8 J	290	804	355	2410
			8 ½ J	295			
			9 J	300			
			9 ½ J	305			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
65 series							
285/65 R 17	116	1250	8 J	299			
			8 ½ J	304	816	360	2446
			9 J	309			
			9 ½ J	314			
			10 J	319			
235/65 R 18	106	950	6 ½ J	245			
235/65 R 18 XL	110	1060	7 J	250	775	348	2327
			7 ½ J	255			
			8 J	260			
			8 ½ J	265			
255/65 R 18	111	1090	7 J	265			
			7 ½ J	270	803	358	2406
			8 J	275			
			8 ½ J	280			
			9 J	285			
265/65 R 18	114	1180	7 ½ J	278			
			8 J	283	815	363	2443
			8 ½ J	288			
			9 J	293			
			9 ½ J	298			
275/65 R 18	116	1250	7 ½ J	285			
			8 J	290	829	368	2486
			8 ½ J	295			
			9 J	300			
			9 ½ J	305			
235/65 R 19 XL	109	1030	6 ½ J	245			
			7 J	250	801	360	2406
			7 ½ J	255			
			8 J	260			
			8 ½ J	265			
60 series							
165/60 R 13	73	365	4.50 B ⁴⁾	172			
			5.00 B ⁴⁾	177	536	242	1610
			5.50 B ⁴⁾	182			
			6.00 B ⁴⁾	187			
175/60 R 13	77	412	5 J	184	548	247	1647
			5 ½ J	189			
			6 J	194			
185/60 R 13	80	450	5.00 B ⁴⁾	192			
			5.50 B ⁴⁾	197	560	252	1684
			6.00 B ⁴⁾	202			
			6 ½ J	207			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
60 series							
165/60 R 14	75	387	4 ½ J	172			
165/60 R 14 XL	79	437	5 J ⁵⁾	177	562	255	1690
			5 ½ J	182			
			6 J	187			
175/60 R 14	79	437	5 J ⁵⁾	184	574	260	1726
			5 ½ J	189			
			6 J	194			
185/60 R 14	82	475	5 J	192	586	264	1763
			5 ½ J	197			
			6 J	202			
			6 ½ J	207			
195/60 R 14	86	530	5 ½ J	204	600	269	1800
			6 J	209			
			6 ½ J	214			
			7 J	219			
155/60 R 15	74	375	4 ½ J	163	575	263	1729
			5 J	168			
			5 ½ J	174			
165/60 R 15	77	412	4.50 B ⁴⁾	172	587	268	1766
			5.00 B ⁴⁾	177			
			5.50 B ⁴⁾	182			
			6.00 B ⁴⁾	187			
175/60 R 15	81	462	5 J	184	599	272	1803
			5 ½ J	189			
			6 J	194			
185/60 R 15	84	500	5 J	192			
185/60 R 15 XL	88	560	5 ½ J	197	611	277	1839
			6 J	202			
			6 ½ J	207			
195/60 R 15	88	560	5 ½ J	204			
195/60 R 15 XL	92	630	6 J	209	625	282	1876
			6 ½ J	214			
			7 J	219			
205/60 R 15	91	615	5 ½ J	212			
205/60 R 15 XL / Rf.	95	690	6 J	217	637	286	1912
			6 ½ J	222			
			7 J	227			
			7 ½ J	232			
215/60 R 15	94	670	6 J	225			
	95	690	6 ½ J	230	649	291	1949
215/60 R 15 XL	98	750	7 J	235			
			7 ½ J	240			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
60 series							
225/60 R 15	96	710	6 J	232			
			6 ½ J	237	661	296	1986
			7 J	242			
			7 ½ J	247			
			8 J	252			
235/60 R 15	98	750	6 ½ J	245			
			7 J	250	675	300	2022
			7 ½ J	255			
			8 J	260			
			8 ½ J	265			
255/60 R 15	102	850	7 J	265			
			7 ½ J	270	699	310	2095
			8 J	275			
			8 ½ J	280			
			9 J	285			
275/60 R 15	107	975	7 ½ J	285			
			8 J	290	725	319	2169
			8 ½ J	295			
			9 J	300			
			9 ½ J	305			
185/60 R 16	86	530	5 J	192			
			5 ½ J	197	636	290	1915
			6 J	202			
			6 ½ J	207			
195/60 R 16	89	580	5 ½ J	204			
195/60 R 16 XL	93	650	6 J	209	650	294	1952
			6 ½ J	215			
			7 J	220			
205/60 R 16	92	630	5 ½ J	212			
205/60 R 16 XL	96	710	6 J	217	662	299	1989
			6 ½ J	222			
			7 J	227			
			7 ½ J	232			
215/60 R 16	95	690	6 J	225			
215/60 R 16 XL / Rf.	99	775	6 ½ J	230	674	304	2025
			7 J	235			
			7 ½ J	240			
225/60 R 16	98	750	6 J	232			
225/60 R 16 XL / Rf.	102	850	6 ½ J	237	686	309	2062
			7 J	242			
			7 ½ J	247			
			8 J	252			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
60 series							
235/60 R 16	100	800	6 ½ J	245			
235/60 R 16 XL / Rf.	104	900	7 J	250	700	313	2098
			7 ½ J	255			
			8 J	260			
			8 ½ J	265			
215/60 R 17	96	710	6 J	225			
			6 ½ J	230	700	317	2105
			7 J	235			
			7 ½ J	240			
225/60 R 17	99	775	6 J	232			
225/60 R 17 XL	103	875	6 ½ J	237	712	321	2141
			7 J	242			
			7 ½ J	247			
			8 J	252			
235/60 R 17	102	850	6 ½ J	245			
235/60 R 17 XL	106	950	7 J	250	726	326	2178
			7 ½ J	255			
			8 J	260			
			8 ½ J	265			
255/60 R 17	106	950	7 J	265			
			7 ½ J	270	750	335	2251
			8 J	275			
			8 ½ J	280			
			9 J	285			
275/60 R 17	110	1060	7 ½ J	285			
			8 J	290	776	345	2324
			8 ½ J	295			
			9 J	300			
			9 ½ J	305			
P 225/60 R 18	99	775	6 J	232			
225/60 R 18	100	800	6 ½ J	237	737	334	2217
225/60 R 18 XL	104	900	7 J	242			
			7 ½ J	247			
			8 J	252			
235/60 R 18	103	875	6 ½ J	245			
235/60 R 18 XL	107	975	7 J	250	751	339	2254
			7 ½ J	255			
			8 J	260			
			8 ½ J	265			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
60 series							
P 245/60 R 18	104	900	7 J	258	763	343	2291
245/60 R 18	105	925	7 ½ J 8 J 8 ½ J	263 268 273			
255/60 R 18	108	1000	7 J	265			
255/60 R 18 XL	112	1120	7 ½ J 8 J 8 ½ J 9 J	270 275 281 286	775	348	2327
265/60 R 18	110	1060	7 ½ J	278			
265/60 R 18 XL	114	1180	8 J 8 ½ J 9 J 9 ½ J	283 288 293 298	787	353	2364
275/60 R 18	113	1150	7 ½ J 8 J 8 ½ J 9 J 9 ½ J	285 290 295 300 305	801	357	2400
285/60 R 18	116	1250	8 J 8 ½ J 9 J 9 ½ J 10 J	299 304 309 314 319	813	362	2437
255/60 R 19	109	1030	7 J 7 ½ J 8 J 8 ½ J 9 J	265 270 275 280 285	801	361	2406
235/60 R 20 XL	108	1000	6 ½ J 7 J 7 ½ J 8 J 8 ½ J	245 250 255 260 265	XXX	XXX	XXXX
275/60 R 20 XL	119	1360	7 ½ J 8 J 8 ½ J 9 J 9 ½ J	285 290 295 300 305	852	383	2556

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
55 series							
195/55 R 13	80	450	5.50 B ⁴⁾	204			
			6.00 B ⁴⁾	209	552	249	1659
			6 ½ J	214			
			7 J	219			
185/55 R 14	80	450	5 J	192			
			5 ½ J	197			
			6 J	202	568	257	1708
			6 ½ J	207			
175/55 R 15	77	412	5 J	184			
			5 ½ J	189	581	266	1748
			6 J	194			
185/55 R 15	82	475	5 J	192			
185/55 R 15 XL / Rf	86	530	5 ½ J	197			
			6 J	202	593	270	1784
			6 ½ J	207			
195/55 R 15	85	515	5 ½ J	204			
195/55 R 15 XL / Rf.	89	580	6 J	209	603	274	1815
			6 ½ J	214			
			7 J	219			
205/55 R 15	88	560	5 ½ J	213			
			6 J	218			
			6 ½ J	223	617	278	1851
			7 J	228			
			7 ½ J	233			
225/55 R 15	92	630	6 J	232			
			6 ½ J	237			
			7 J	242	639	287	1918
			7 ½ J	247			
			8 J	252			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
55 series							
185/55 R 16	83	487	5 J	192			
185/55 R 16 XL	87	545	5 ½ J	197			
			6 J	202	618	283	1861
			6 ½ J	207			
195/55 R 16	87	545	5 ½ J	204			
195/55 R 16 XL	91	615	6 J	209	628	287	1891
			6 ½ J	214			
			7 J	219			
205/55 R 16	91	615	5 ½ J	213			
205/55 R 16 XL	94	670	6 J	218			
			6 ½ J	223	642	291	1928
			7 J	228			
			7 ½ J	233			
215/55 R 16	93	650	6 J	225			
215/55 R 16 Rf.	95	690	6 ½ J	230			
215/55 R 16 XL	97	730	7 J	235	652	295	1958
			7 ½ J	240			
225/55 R 16	95	690	6 J	232			
225/55 R 16 XL	99	775	6 ½ J	237			
			7 J	242	664	300	1995
			7 ½ J	247			
			8 J	252			
255/55 R 16	103	875	7 J	266			
			7 ½ J	271			
			8 J	276	698	313	2092
			8 ½ J	281			
			9 J	286			
195/55 R 17	88	560	5 ½ J	204			
			6 J	209	654	300	1970
			6 ½ J	214			
			7 J	219			
205/55 R 17	91	615	5 ½ J	213			
205/55 R 17 XL	95	690	6 J	218			
			6 ½ J	223	668	304	2007
			7 J	228			
			7 ½ J	233			
215/55 R 17	94	670	6 J	225			
215/55 R 17 XL	98	750	6 ½ J	230			
			7 J	235	678	308	2037
			7 ½ J	240			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)	
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)			
55 series								
225/55 R 17	97	730	6 J	232				
225/55 R 17 XL / Rf.	101	825	6 ½ J	237				
			7 J	242	690	312	2074	
			7 ½ J	247				
			8 J	252				
235/55 R 17	99	775	6 ½ J	245				
235/55 R 17 XL / Rf.	103	875	7 J	250				
			7 ½ J	255	700	317	2105	
			8 J	260				
			8 ½ J	265				
245/55 R 17	102	850	7 J	258				
			7 ½ J	263	712	321	2141	
			8 J	268				
			8 ½ J	273				
255/55 R 17	104	900	7 J	266				
			7 ½ J	271				
			8 J	276	724	325	2172	
			8 ½ J	281				
			9 J	286				
275/55 R 17	109	1030	7 ½ J	285				
			8 J	290				
			8 ½ J	295	746	334	2239	
			9 J	300				
			9 ½ J	305				
215/55 R 18	95	690	6 J	225				
215/55 R 18 XL	99	775	6 ½ J	230				
			7 J	235	703	321	2114	
			7 ½ J	240				
225/55 R 18	98	750	6 J	232				
225/55 R 18 XL	102	850	6 ½ J	237				
			7 J	242	715	325	2150	
			7 ½ J	247				
			8 J	252				
235/55 R 18	100	800	6 ½ J	245				
235/55 R 18 XL	104	900	7 J	250				
			7 ½ J	255	725	329	2181	
			8 J	260				
			8 ½ J	266				
			9 J	271				
255/55 R 18	105	925	7 J	266				
255/55 R 18 XL	109	1030	7 ½ J	271				
			8 J	276	749	338	2248	
			8 ½ J	281				
			9 J	286				

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
55 series							
225/55 R 19 XL	103	875	6 J	232			
			6 ½ J	237			
			7 J	242	741	338	2230
			7 ½ J	247			
			8 J	252			
235/55 R 19	101	825	6 ½ J	245			
235/55 R 19 XL	105	925	7 J	250			
			7 ½ J	255	751	342	2260
			8 J	260			
			8 ½ J	266			
245/55 R 19	103	875	7 J	258			
			7 ½ J	263	763	346	2297
			8 J	268			
			8 ½ J	273			
255/55 R 19 XL	111	1090	7 J	265			
			7 ½ J	270			
			8 J	276	775	351	2327
			8 ½ J	281			
			9 J	286			
275/55 R 19	111	1090	7 ½ J	285			
			8 J	290			
			8 ½ J	295	797	359	2394
			9 J	300			
			9 ½ J	305			
195/55 R 20 XL	95	690	5 ½ J	204			
			6 J	209	730	338	2202
			6 ½ J	214			
			7 J	219			
235/55 R 20	102	850	6 ½ J	245			
235/55 R 20 XL	105	925	7 J	250			
			7 ½ J	255	776	355	2336
			8 J	260			
			8 ½ J	265			
255/55 R 20 XL	110	1060	7 J	265			
			7 ½ J	270			
			8 J	276	800	363	2403
			8 ½ J	281			
			9 J	296			
275/55 R 20 XL	117	1285	7 ½ J	285			
			8 J	290			
			8 ½ J	295	822	372	2471
			9 J	300			
			9 ½ J	305			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
50 series							
175/50 R 13	72	355	5.00 B ⁴⁾	184			
			5.50 B ⁴⁾	189	514	233	1543
			6.00 B ⁴⁾	194			
185/50 R 14	77	412	5 J	192			
			5 ½ J	197			
			6 J	202	550	250	1653
			6 ½ J	207			
165/50 R 15	72	355	4 ½ J	172			
			5 J	177	553	255	1668
			5 ½ J	182			
195/50 R 15	82	475	5 ½ J	204			
			6 J	209	585	267	1760
			6 ½ J	214			
			7 J	219			
205/50 R 15	86	530	5 ½ J	213			
			6 J	218			
			6 ½ J	223	595	270	1790
			7 J	228			
			7 ½ J	233			
185/50 R 16	81	462	5 J	192			
			5 ½ J	197			
			6 J	202	600	275	1806
			6 ½ J	207			
195/50 R 16	84	500	5 ½ J	204			
195/50 R 16 XL	88	560	6 J	209	610	279	1836
			6 ½ J	214			
			7 J	219			
205/50 R 16	87	545	5 ½ J	213			
			6 J	218			
			6 ½ J	223	620	283	1867
			7 J	228			
			7 ½ J	233			
225/50 R 16	92	630	6 J	232			
			6 ½ J	237			
	93	650	7 J	242	642	291	1928
			7 ½ J	247			
			8 J	252			
205/50 R 17	89	580	5 ½ J	213			
205/50 R 17 XL	93	650	6 J	218			
			6 ½ J	223	646	296	1946
			7 J	228			
			7 ½ J	233			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
50 series							
215/50 R 17	91	615	6 J	225			
215/50 R 17 XL	95	690	6 ½ J	230			
			7 J	235	656	300	1976
			7 ½ J	240			
225/50 R 17	94	670	6 J	232			
225/50 R 17 XL	98	750	6 ½ J	237			
			7 J	242	668	304	2007
			7 ½ J	247			
			8 J	252			
235/50 R 17	96	710	6 ½ J	245			
235/50 R 17 XL	100	800	7 J	250			
			7 ½ J	255	678	308	2037
			8 J	260			
			8 ½ J	265			
245/50 R 17	99	775	7 J	258			
			7 ½ J	263	688	311	2068
			8 J	268			
			8 ½ J	273			
215/50 R 18	92	630	6 J	225			
			6 ½ J	230			
			7 J	235	681	312	2053
			7 ½ J	240			
225/50 R 18	95	690	6 J	232			
225/50 R 18 XL	99	775	6 ½ J	237			
			7 J	242	693	316	2083
			7 ½ J	247			
			8 J	252			
235/50 R 18	97	730	6 ½ J	245			
235/50 R 18 XL	101	825	7 J	250			
			7 ½ J	255	703	320	2114
			8 J	260			
			8 ½ J	265			
245/50 R 18	100	800	7 J	258			
245/50 R 18 XL	104	900	7 ½ J	263	713	324	2144
			8 J	268			
			8 ½ J	273			
285/50 R 18	109	1030	8 J	299			
			8 ½ J	304			
			9 J	309	755	340	2266
			9 ½ J	314			
			10 J	319			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
50 series							
235/50 R 19	99	775	6 ½ J	245			
235/50 R 19 XL	103	875	7 J	250			
			7 ½ J	255	729	333	2193
			8 J	260			
			8 ½ J	265			
255/50 R 19	103	875	7 J	266			
255/50 R 19 XL	107	975	7 ½ J	271			
			8 J	276	749	341	2254
			8 ½ J	281			
			9 J	286			
265/50 R 19	106	950	7 ½ J	278			
265/50 R 19 XL	110	1060	8 J	283			
			8 ½ J	288	759	345	2284
			9 J	293			
			9 ½ J	298			
275/50 R 19 XL	112	1120	7 ½ J	285			
			8 J	290			
			8 ½ J	295	771	349	2315
			9 J	300			
			9 ½ J	305			
245/50 R 20	102	850	7 J	258			
			7 ½ J	263	764	350	2300
			8 J	268			
			8 ½ J	273			
255/50 R 20 XL	109	1030	7 J	266			
			7 ½ J	271			
			8 J	276	774	353	2330
			8 ½ J	281			
			9 J	286			
265/50 R 20 XL	111	1090	7 ½ J	278			
			8 J	283			
			8 ½ J	288	784	357	2361
			9 J	294			
			9 ½ J	299			
275/50 R 20	109	1030	7 ½ J	285			
			8 J	290			
			8 ½ J	295	796	361	2391
			9 J	301			
			9 ½ J	306			
285/50 R 20	112	1120	8 J	299			
285/50 R 20 XL	116	1250	8 ½ J	304			
			9 J	309	806	365	2422
			9 ½ J	314			
			10 J	319			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
50 series							
295/50 R 20 XL	118	1320	8 J	306			
			8 ½ J	311			
			9 J	316			
			9 ½ J	321	816	369	2452
			10 J	326			
305/50 R 20 XL	120	1400	8 ½ J	319			
			9 J	324			
			9 ½ J	329	826	373	2482
			10 J	334			
			10 ½ J	339			
			11 J	344			
45 series							
195/45 R 13	75	387	6 J	198			
			6 ½ J	203	514	234	1543
			7 J	208			
			7 ½ J	213			
195/45 R 14	77	412	6 J	198			
			6 ½ J	203	540	246	1623
			7 J	208			
			7 ½ J	213			
195/45 R 15	78	425	6 J	198			
			6 ½ J	203	565	259	1699
			7 J	208			
			7 ½ J	213			
195/45 R 16	80	450	6 J	198			
195/45 R 16 XL	84	500	6 ½ J	203	590	272	1775
			7 J	208			
			7 ½ J	213			
205/45 R 16	83	487	6 ½ J	209			
205/45 R 16 XL	87	545	7 J	214	598	275	1800
			7 ½ J	219			
215/45 R 16	86	530	7 J	222	608	279	1830
215/45 R 16 XL	90	600	7 ½ J	227			
			8 J	232			
225/45 R 16	89	580	7 J	229			
			7 ½ J	234	616	282	1854
			8 J	239			
			8 ½ J	244			
245/45 R 16	94	670	7 ½ J	248			
			8 J	253	634	289	1909
			8 ½ J	258			
			9 J	263			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
45 series							
195/45 R 17	81	462	6 J	198			
			6 ½ J	203	616	284	1854
			7 J	208			
			7 ½ J	213			
205/45 R 17	84	500	6 ½ J	209			
205/45 R 17 XL	88	560	7 J	214	624	288	1879
			7 ½ J	219			
215/45 R 17	87	545	7 J	222	634	291	1909
215/45 R 17 XL	91	615	7 ½ J	227			
			8 J	232			
225/45 R 17	91	615	7 J	229			
225/45 R 17 XL / Rf.	94	670	7 ½ J	234	642	295	1934
			8 J	239			
			8 ½ J	244			
235/45 R 17	94	670	7 ½ J	240			
235/45 R 17 XL	97	730	8 J	245	652	298	1964
			8 ½ J	250			
			9 J	255			
245/45 R 17	95	690	7 ½ J	248			
245/45 R 17 XL	99	775	8 J	253	660	302	1989
			8 ½ J	258			
			9 J	263			
255/45 R 17	98	750	8 J	260			
255/45 R 17 XL	102	850	8 ½ J	265	672	305	2019
			9 J	270			
			9 ½ J	275			
215/45 R 18 XL	93	650	7 J	222	659	304	1986
			7 ½ J	227			
			8 J	232			
225/45 R 18	91	615	7 J	229			
225/45 R 18 XL	95	690	7 ½ J	234	667	308	2010
			8 J	239			
			8 ½ J	244			
235/45 R 18	94	670	7 ½ J	240			
235/45 R 18 XL	98	750	8 J	245	677	311	2040
			8 ½ J	250			
			9 J	255			
245/45 R 18	96	710	7 ½ J	248			
245/45 R 18 XL	100	800	8 J	253	685	315	2065
			8 ½ J	258			
			9 J	263			
255/45 R 18	99	775	8 J	260			
255/45 R 18 XL	103	875	8 ½ J	265	697	318	2095
			9 J	270			
			9 ½ J	275			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
45 series							
265/45 R 18	101	825	8 ½ J	272			
			9 J	277	705	322	2120
			9 ½ J 10 J	282 287			
275/45 R 18	103	875	8 ½ J	279			
			9 J	284	715	325	2150
			9 ½ J 10 J	289 294			
			10 ½ J	299			
225/45 R 19	92	630	7 J	229			
225/45 R 19 XL	96	710	7 ½ J	234	693	320	2089
			8 J 8 ½ J	239 244			
235/45 R 19	95	690	7 ½ J	240			
235/45 R 19 XL	99	775	8 J	245	703	324	2120
			8 ½ J 9 J	250 255			
245/45 R 19	98	750	7 ½ J	248			
245/45 R 19 XL	102	850	8 J	253	711	327	2144
			8 ½ J 9 J	258 263			
255/45 R 19	100	800	8 J	260			
255/45 R 19 XL	104	900	8 ½ J	265	723	331	2175
			9 J 9 ½ J	270 275			
265/45 R 19 XL	105	925	8 ½ J	272			
			9 J	277	731	334	2199
			9 ½ J 10 J	282 287			
275/45 R 19 XL	108	1000	8 ½ J	279			
			9 J	284	741	338	2230
			9 ½ J 10 J	289 294			
			10 ½ J	299			
285/45 R 19	107	975	9 J	291			
285/45 R 19 XL	111	1090	9 ½ J	296	749	341	2254
			10 J 10 ½ J	301 306			
295/45 R 19	109	1030	9 ½ J	302			
			10 J	308	759	345	2284
			10 ½ J 11 J	312 317			
235/45 R 20 XL	100	800	7 ½ J	241			
			8 J	245	728	336	2196
			8 ½ J 9 J	251 256			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
45 series							
245/45 R 20 XL	103	875	7 ½ J	248			
			8 J	253	736	340	2220
			8 ½ J	258			
			9 J	263			
255/45 R 20	101	825	8 J	260			
255/45 R 20 XL	105	925	8 ½ J	265	748	344	2251
			9 J	270			
			9 ½ J	275			
265/45 R 20	104	900	8 ½ J	272			
265/45 R 20 XL	108	1000	9 J	277	756	347	2275
			9 ½ J	282			
			10 J	287			
275/45 R 20 XL	110	1060	8 ½ J	279			
			9 J	284	766	351	2306
			9 ½ J	289			
			10 J	294			
			10 ½ J	299			
285/45 R 20 XL	112	1120	9 J	291			
			9 ½ J	296	774	354	2330
			10 J	301			
			10 ½ J	306			
295/45 R 20 XL	114	1180	9 ½ J	303			
			10 J	308	784	358	2361
			10 ½ J	313			
11 J	318						
265/45 R 21 XL	108	1000	8 ½ J	272			
			9 J	277	781	360	2352
			9 ½ J	282			
10 J	287						
275/45 R 21	107	975	8 ½ J	279			
275/45 R 21 XL	110	1060	9 J	284	791	363	2382
			9 ½ J	289			
			10 J	294			
			10 ½ J	299			
285/45 R 21	109	1030	9 J	291			
			9 ½ J	296	799	367	2406
			10 J	301			
			10 ½ J	306			
285/45 R 22 XL	114	1180	9 J	291			
			9 ½ J	296	825	379	2486
			10 J	301			
			10 ½ J	306			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
45 series							
305/45 R 22 XL	118	1320	9 ½ J	310			
			10 J	315	843	386	2541
			10 ½ J	320			
			11 J	325			
			11 ½ J	330			
40 series							
195/40 R 14	73	365	6 ½ J	203			
			7 J	208	518	239	1562
			7 ½ J	213			
195/40 R 16 XL	80	450	6 ½ J	203			
			7 J	208	568	264	1714
			7 ½ J	213			
215/40 R 16 XL	86	530	7 J	222			
			7 ½ J	227	584	270	1763
			8 J	232			
			8 ½ J	237			
225/40 R 16	85	515	7 ½ J	234			
			8 J	239	594	273	1787
			8 ½ J	244			
			9 J	249			
195/40 R 17 XL	81	462	6 ½ J	203			
			7 J	208	594	277	1793
			7 ½ J	213			
205/40 R 17 XL	84	500	7 J	215			
			7 ½ J	220	602	280	1818
			8 J	225			
215/40 R 17	83	487	8 J	222			
215/40 R 17 XL	87	545	7 ½ J	227	610	283	1842
			8 J	232			
			8 ½ J	237			
235/40 R 17	90	600	8 J	246			
			8 ½ J	251	628	289	1891
			9 J	256			
			9 ½ J	261			
245/40 R 17	91	615	8 J	253			
			8 ½ J	258	636	292	1915
			9 J	263			
			9 ½ J	268			
255/40 R 17	94	670	8 ½ J	265			
255/40 R 17 XL	98	750	9 J	270	644	295	1940
			9 ½ J	275			
			10 J	280			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
40 series							
205/40 R 18 XL	86	530	7 J	215			
			7 ½ J	220	627	293	1894
			8 J	225			
215/40 R 18	85	515	7 J	222			
215/40 R 18 XL	89	580	7 ½ J	227	635	296	1918
			8 J	232			
			8 ½ J	237			
225/40 R 18	88	560	7 ½ J	234			
225/40 R 18 XL	92	630	8 J	239	645	299	1943
			8 ½ J	244			
			9 J	249			
235/40 R 18	91	615	8 J	246			
235/40 R 18 XL	95	690	8 ½ J	251	653	302	1967
			9 J	256			
			9 ½ J	261			
245/40 R 18	93	650	8 J	253			
245/40 R 18 XL	97	730	8 ½ J	258	661	305	1992
			9 J	263			
			9 ½ J	268			
255/40 R 18	95	690	8 ½ J	265			
255/40 R 18 XL	99	775	9 J	270	669	308	2016
			9 ½ J	275			
			10 J	280			
265/40 R 18 XL	101	825	9 J	277			
			9 ½ J	282	677	311	2040
			10 J	287			
			10 ½ J	292			
275/40 R 18	99	775	9 J	284			
275/40 R 18 XL	103	875	9 ½ J	289	685	314	2065
			10 J	294			
			10 ½ J	299			
			11 J	304			
225/40 R 19	89	580	7 ½ J	234			
225/40 R 19 XL	93	650	8 J	239	671	312	2022
			8 ½ J	244			
			9 J	249			
235/40 R 19	92	630	8 J	246			
235/40 R 19 XL	96	710	8 ½ J	251	679	315	2047
			9 J	256			
			9 ½ J	261			
245/40 R 19	94	670	8 J	253			
245/40 R 19 XL	98	750	8 ½ J	258	687	318	2071
			9 J	263			
			9 ½ J	268			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
40 series							
255/40 R 19	96	710	8 ½ J	265			
255/40 R 19 XL	100	800	9 J	270	695	321	2095
			9 ½ J	275			
			10 J	280			
265/40 R 19	98	750	9 J	277			
265/40 R 19 XL	102	850	9 ½ J	282	703	324	2120
			10 J	287			
			10 ½ J	292			
275/40 R 19	101	825	9 J	284			
275/40 R 19 XL	105	925	9 ½ J	289	711	327	2144
			10 J	294			
			10 ½ J	299			
			11 J	304			
285/40 R 19	103	875	9 ½ J	296			
285/40 R 19 XL	107	975	10 J	302	721	330	2169
			10 ½ J	307			
			11 J	312			
295/40 R 19 XL	108	1000	10 J	308			
			10 ½ J	313	729	333	2193
			11 J	318			
			11 ½ J	323			
235/40 R 20 XL	96	710	8 J	246			
			8 ½ J	251	***	327	****
			9 J	256			
			9 ½ J	261			
245/40 R 20	95	690	8 J	253			
245/40 R 20 XL	99	775	8 ½ J	258	712	330	2147
			9 J	263			
			9 ½ J	268			
255/40 R 20	97	730	8 ½ J	265			
255/40 R 20 XL	101	825	9 J	270	720	334	2172
			9 ½ J	275			
			10 J	280			
265/40 R 20 XL	104	900	9 J	277			
			9 ½ J	282	728	337	2196
			10 J	288			
			10 ½ J	293			
275/40 R 20 XL	106	950	9 J	284			
			9 ½ J	289	736	340	2220
			10 J	294			
			10 ½ J	299			
			11 J	304			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
40 series							
295/40 R 20	106	950	10 J	308			
295/40 R 20 XL	110	1060	10 ½ J	313	754	346	2269
			11 J	318			
			11 ½ J	323			
255/40 R 21 XL	102	850	8 ½ J	265			
			9 J	270	745	346	2248
			9 ½ J	275			
			10 J	280			
265/40 R 21	101	825	9 J	277			
265/40 R 21 XL	105	925	9 ½ J	282	753	349	2272
			10 J	288			
			10 ½ J	293			
275/40 R 21 XL	107	975	9 J	284			
			9 ½ J	289	761	353	2297
			10 J	294			
			10 ½ J	299			
			11 J	304			
285/40 R 21 XL	109	1030	9 ½ J	297			
			10 J	302	771	356	2321
			10 ½ J	307			
			11 J	312			
295/40 R 21 XL	111	1090	10 J	307			
			10 ½ J	313	779	359	2345
			11 J	318			
			11 ½ J	324			
315/40 R 21	111	1090	10 ½ J	328			
			11 J	333	795	365	2394
			11 ½ J	338			
			12 J	343			
			12 ½ J	348			
325/40 R 21	113	1150	11 J	339			
			11 ½ J	344	803	368	2419
			12 J	349			
			12 ½ J	354			
			13 J	359			
265/40 R 22 XL	106	950	9 J	277			
			9 ½ J	282	779	362	2352
			10 J	288			
			10 ½ J	293			
275/40 R 22 XL	108	1000	9 J	284			
			9 ½ J	289	787	365	2376
			10 J	294			
			10 ½ J	299			
			11 J	304			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
40 series							
285/40 R 22	106	950	9 ½ J	297			
285/40 R 22 XL	110	1060	10 J	302	797	368	2400
			10 ½ J	307			
			11 J	312			
295/40 R 22 XL	112	1120	10 J	308			
			10 ½ J	313	805	371	2425
			11 J	318			
			11 ½ J	323			
305/40 R 22 XL	114	1180	10 J	316			
			10 ½ J	321			
			11 J	326	813	375	2449
			11 ½ J	331			
			12 J	336			
305/40 R 23 XL	115	1215	10 J	316			
			10 ½ J	321			
			11 J	326	838	387	2525
			11 ½ J	331			
			12 J	336			
285/40 R 24 XL	112	1120	9 ½ J	296			
			10 J	302	848	394	2556
			10 ½ J	307			
			11 J	312			
305/40 R 24 XL	117	1285	10 J	316			
			10 ½ J	321			
			11 J	326	864	400	2605
			11 ½ J	331			
			12 J	336			
35 series							
215/35 R 17 XL	83	487	7 J	222			
			7 ½ J	227	588	275	1775
			8 J	232			
			8 ½ J	237			
245/35 R 17	87	545	8 J	253			
			8 ½ J	258	610	283	1842
			9 J	263			
			9 ½ J	268			
215/35 R 18 XL	84	500	7 J	222			
			7 ½ J	227	613	287	1851
			8 J	232			
			8 ½ J	237			
225/35 R 18 XL	87	545	7 ½ J	234			
			8 J	239	621	290	1876
			8 ½ J	244			
			9 J	249			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
35 series							
245/35 R 18	88	560	8 J	253			
245/35 R 18 XL	92	630	8 ½ J	258	635	295	1918
			9 J	263			
			9 ½ J	268			
255/35 R 18 XL	94	670	8 ½ J	265			
			9 J	270	643	298	1937
			9 ½ J	275			
			10 J	280			
265/35 R 18	93	650	9 J	277			
265/35 R 18 XL	97	730	9 ½ J	282	651	301	1961
			10 J	287			
			10 ½ J	292			
275/35 R 18	95	690	9 J	284			
275/35 R 18 XL	99	775	9 ½ J	289	657	304	1979
			10 J	294			
			10 ½ J	299			
			11 J	304			
285/35 R 18	97	730	9 ½ J	297			
285/35 R 18 XL	101	825	10 J	302	665	306	2004
			10 ½ J	307			
			11 J	312			
215/35 R 19 XL	85	515	7 J	222			
			7 ½ J	227	639	300	1931
			8 J	232			
			8 ½ J	237			
225/35 R 19 XL	88	560	7 ½ J	234			
			8 J	239	647	303	1955
			8 ½ J	244			
			9 J	249			
235/35 R 19	87	545	8 J	246			
235/35 R 19 XL	91	615	8 ½ J	251	653	305	1973
			9 J	256			
			9 ½ J	261			
245/35 R 19 XL	93	650	8 J	253			
			8 ½ J	258	661	308	1998
			9 J	263			
			9 ½ J	268			
255/35 R 19	92	630	8 ½ J	265			
255/35 R 19 XL	96	710	9 J	270	669	311	2016
			9 ½ J	275			
			10 J	280			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
35 series							
265/35 R 19	94	670	9 J	277			
265/35 R 19 XL	98	750	9 ½ J	282	677	314	2040
			10 J	287			
			10 ½ J	292			
275/35 R 19 XL	100	800	9 J	284			
			9 ½ J	289	683	316	2059
			10 J	294			
			10 ½ J	299			
			11 J	304			
285/35 R 19	99	775	9 ½ J	297			
285/35 R 19 XL	103	875	10 J	302	691	319	2083
			10 ½ J	307			
			11 J	312			
295/35 R 19	100	800	10 J	308			
295/35 R 19 XL	104	900	10 ½ J	313	697	322	2101
			11 J	318			
			11 ½ J	323			
225/35 R 20 XL	90	600	7 ½ J	234			
			8 J	239	672	315	2031
			8 ½ J	244			
			9 J	249			
235/35 R 20	88	560	8 J	246			
235/35 R 20 XL	92	630	8 ½ J	251	678	318	2050
			9 J	256			
			9 ½ J	261			
245/35 R 20	91	615	8 J	253			
245/35 R 20 XL	95	690	8 ½ J	258	686	321	2074
			9 J	263			
			9 ½ J	268			
255/35 R 20 XL	97	730	8 ½ J	265			
			9 J	270	694	324	2092
			9 ½ J	275			
			10 J	280			
265/35 R 20	95	690	9 J	277			
265/35 R 20 XL	99	775	9 ½ J	282	702	326	2117
			10 J	287			
			10 ½ J	292			
275/35 R 20 XL	102	850	9 J	284			
			9 ½ J	289	708	329	2135
			10 J	294			
			10 ½ J	299			
			11 J	304			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
35 series							
285/35 R 20 XL	104	900	9 ½ J	296			
			10 J	302	716	332	2159
			10 ½ J	307			
			11 J	312			
295/35 R 20	101	825	10 J	308			
			10 ½ J	313	722	335	2178
			11 J	318			
			11 ½ J	323			
315/35 R 20 XL	110	1060	10 ½ J	328			
			11 J	333	736	340	2220
			11 ½ J	338			
			12 J	343			
			12 ½ J	348			
245/35 R 21 XL	96	710	8 J	253			
			8 ½ J	258	711	334	2150
			9 J	263			
			9 ½ J	268			
255/35 R 21 XL	98	750	8 ½ J	265			
			9 J	270	719	336	2169
			9 ½ J	275			
			10 J	280			
265/35 R 21 XL	101	825	9 J	277			
			9 ½ J	282	727	339	2193
			10 J	287			
			10 ½ J	292			
275/35 R 21 XL	103	875	9 J	284			
			9 ½ J	289	733	342	2211
			10 J	294			
			10 ½ J	299			
			11 J	304			
295/35 R 21	103	875	10 J	308			
295/35 R 21 XL	107	975	10 ½ J	313	747	347	2254
			11 J	318			
			11 ½ J	324			
275/35 R 22 XL	104	900	9 J	284			
			9 ½ J	289	759	354	2291
			10 J	294			
			10 ½ J	300			
			11 J	305			
285/35 R 22 XL	106	950	9 ½ J	296			
			10 J	302	767	357	2315
			10 ½ J	307			
			11 J	312			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
35 series							
295/35 R 22 XL	108	1000	10 J	308			
			10 ½ J	313	773	360	2333
			11 J	318			
			11 ½ J	323			
305/35 R 24 XL	112	1120	10 J	316			
			10 ½ J	321			
			11 J	326	832	388	2513
			11 ½ J	331			
315/35 R 24 XL	114	1180	12 J	336			
			10 ½ J	328			
			11 J	333	838	391	2532
			11 ½ J	338			
30 series	90	600	12 J	343			
			12 ½ J	348			
			8 ½ J	265			
			9 J	270	617	288	1864
285/30 R 18	93	650	9 ½ J	275			
			9 ½ J	297			
			10 J	302	635	295	1918
295/30 R 18	94	670	10 ½ J	307			
			10 J	308			
295/30 R 18 XL	98	750	10 ½ J	313	643	298	1937
			11 J	318			
255/30 R 19 XL	91	615	11 J	318			
			8 ½ J	265			
			9 J	270	643	301	1943
265/30 R 19 XL	93	650	9 ½ J	275			
			9 J	277			
			9 ½ J	282	649	303	1961
275/30 R 19 XL	96	710	10 J	287			
			9 J	284			
			9 ½ J	289	655	306	1979
285/30 R 19 XL	98	750	10 J	294			
			9 ½ J	297			
			10 J	302	661	308	1998
295/30 R 19	96	710	10 ½ J	307			
			10 J	308			
295/30 R 19 XL	100	800	10 ½ J	313	669	310	2016
			11 J	318			
305/30 R 19 XL	102	850	10 ½ J	321			
			11 J	326	675	313	2034
			11 ½ J	331			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
30 series							
325/30 R 19 XL	105	925	11 J	339			
			11 ½ J	344	687	317	2071
			12 J	349			
235/30 R 20 XL	88	560	8 ½ J	251	656	309	1983
245/30 R 20 XL	90	600	8 J	253			
			8 ½ J	258	662	311	2001
			9 J	263			
255/30 R 20 XL	92	630	8 ½ J	265			
			9 J	270	668	314	2019
			9 ½ J	275			
265/30 R 20 XL	94	670	9 J	277			
			9 ½ J	282	674	316	2037
			10 J	287			
275/30 R 20 XL	97	730	9 J	284			
			9 ½ J	289	680	318	2056
			10 J	294			
285/30 R 20 XL	99	775	9 ½ J	297			
			10 J	302	686	321	2074
			10 ½ J	307			
295/30 R 20 XL	101	825	10 J	308			
			10 ½ J	313	694	323	2092
			11 J	318			
305/30 R 20 XL	103	875	10 ½ J	321			
			11 J	326	700	325	2111
			11 ½ J	331			
335/30 R 20 XL	108	1000	11 ½ J	352			
			12 J	357	718	332	2166
			12 ½ J	362			
255/30 R 21 XL	93	650	8 ½ J	265			
			9 J	270	693	326	2095
			9 ½ J	275			
265/30 R 21 XL	96	710	9 J	277			
			9 ½ J	282	699	329	2114
			10 J	287			
275/30 R 21 XL	98	750	9 J	284			
			9 ½ J	289	705	331	2132
			10 J	294			
285/30 R 21 XL	100	800	9 ½ J	297			
			10 J	302	711	333	2150
			10 ½ J	307			
295/30 R 21 XL	102	850	10 J	308			
			10 ½ J	313	719	336	2169
			11 J	318			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity kg		Width (mm)	Outer-Ø (mm)		
30 series							
315/30 R 21 XL	105	925	10 ½ J	328			
			11 J	333	731	340	2205
			11 ½ J	338			
325/30 R 21 XL	108	1000	11 J	339			
			11 ½ J	344	737	343	2223
			12 J	349			
265/30 R 22 XL	97	730	9 J	277			
			9 ½ J	282	725	341	2193
			10 J	287			
295/30 R 22 XL	103	875	10 J	308			
			10 ½ J	313	745	348	2248
			11 J	318			
315/30 R 22 XL	107	975	10 ½ J	328			
			11 J	333	757	353	2284
			11 ½ J	338			
305/30 R 23 XL	105	925	10 ½ J	321			
			11 J	326	776	363	2342
			11 ½ J	331			
25 series							
315/25 R 19 XL	98	750	11 J	333			
			11 ½ J	338	647	303	1955
			12 J	343			
295/25 R 20 XL	95	690	10 J	308			
			10 ½ J	313	662	312	2001
			11 J	318			
305/25 R 20 XL	97	730	10 ½ J	321			
			11 J	326	666	313	2013
			11 ½ J	331			
325/25 R 20 XL	101	825	11 ½ J	344			
			12 J	349	676	317	2044
			12 ½ J	355			
295/25 R 21 XL	96	710	10 J	308			
			10 ½ J	313	687	324	2077
			11 J	318			
325/25 R 21 XL	102	850	11 ½ J	344			
			12 J	349	701	330	2120
			12 ½ J	354			
305/25 R 22 XL	99	775	10 ½ J	320			
			11 J	326	717	339	2169
			11 ½ J	331			
335/25 R 22 XL	105	925	11 ½ J	351			
			12 J	357	733	345	2217
			12 ½ J	362			
315/25 R 23 XL	102	850	11 J	333			
			11 ½ J	338	748	354	2263
			12 J	343			

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions			Load Index LI	Wheel position ⁹⁾
	Load Index LI ⁷⁾			Max. standard value in operation ²⁾		on measuring rim		
				Width (mm)	Outer-Ø (mm)	Width (mm)		
LT sizes								
LT 215/85 R 16	115/112	5 ½ J	224			115	S	
		6 J	229	786	216	112	T	
		6 ½ J	234					
		7 J	239					
LT 235/85 R 16	120/116	6 J	244			120	S	
		6 ½ J	249	822	235	116	T	
		7 J	254					
		7 ½ J	259					
LT 235/75 R 15	104/101	6 J	244			104	S	
		6 ½ J	249	747	235	101	T	
		7 J	254					
LT 225/75 R 16	110/107	6 J	236	758	223	110	S	
	115/112	6 ½ J	241			107	T	
		7 J	246			115	S	
						112	T	
LT 245/75 R 16	120/116	6 ½ J	258			120	S	
		7 J	263	788	248	116	T	
		7 ½ J	268					
		8 J	273					
LT 265/75 R 16	123/120	7 J	278			123	S	
		7 ½ J	283	820	267	120	T	
		8 J	288					
LT 285/75 R 16	122/119	7 ½ J	281			122	S	
	126/123	8 J	286	852	286	119	T	
		8 ½ J	291			126	S	
		9 J	296			123	T	
LT 295/75 R 16	123/120	7 ½ J	307			123	S	
		8 J	312	866	294	120	T	
		8 ½ J	317					
		9 J	322					
		9 ½ J	327					
LT 315/75 R 16	121	8 J	327			121	S	
	127/124	8 ½ J	332	896	313	127	S	
		9 J	337			124	T	
		9 ½ J	342					
		10 J	347					
		10 ½ J	352					
		11 J	357					
		LT 305/70 R 16	118/115	8 J	320			118
124/121	8 ½ J		325			115	T	
	9 J		330	852	311	124	S	
	9 ½ J		335			121	T	

Load capacity (kg) per axle at a tyre pressure (bar)											Speed Symbol and reference speed (km/h)	
			2.5		3.0		3.5	4.0	4.5	5.0		5.5
			1390 2520		1580 2880		1760 3200	1930 3480	2120 3900	2260 4120	2430 4480	Q 160
			1580 2880		1800 3280		2000 3640	2200 4000	2380 4320	2580 4680	2760 5040	Q 160 S 180
			1420 2580		1620 2940		1800 3300					Q 160
			1400 2540		1590 2900		1760 3200	1940 3540	2120 3900			Q 160
			1400 2540		1590 2900		1760 3200	1940 3540	2120 3900	2280 4160	2430 4480	
			1580 2880		1800 3280		2000 3640	2200 4000	2380 4320	2580 4680	2760 5040	S 180
			1780 3240		2020 3680		2240 4120	2480 4520	2720 5000	2880 5240	3100 5600	Q 160
			1980 3600		2260 4120		2500 4600	2760 5040	3000 5440			Q 160
			1980 3600		2260 4120		2500 4600	2760 5040	3000 5440	3220 5880	3400 6200	
			2080 3780		2360 4280		2640 4860	2900 5280	3100 5600			Q 160
			2300 4240		2620 4760		2900 5280	3200 5840	3500 6400			Q 160
			2060 3700		2380 4320		2640 4860					
			2060 3700		2380 4320		2640 4860	2900 5280	3200 5800			Q 160

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions			Load Index LI	Wheel position ⁹⁾
	Load Index LI ⁷⁾			Max. standard value in operation ²⁾		on measuring rim		
			Width (mm)	Outer-Ø (mm)	Width (mm)			
LT sizes								
LT 265/70 R 17	121/118	7 J	278			121 118	S T	
		7 ½ J	283					
		8 J	288	818	272			
		8 ½ J	293					
LT 275/70 R 18	125/122	7 J	286			125 122	S T	
		7 ½ J	291					
		8 J	296	859	279			
		8 ½ J	301					
LT 285/60 R 18	122/119	8 J	305			122 119	S T	
		8 ½ J	310	813	292			
		9 J	315					
		9 ½ J	320					
		10 J	325					
LT flotation-sizes								
30 x 9.50 R 15 LT	104	6 ½ J	250			104	S	
		7 J	255					
		7 ½ J	260	765	240			
		8 J	265					
		8 ½ J	270					
31 x 10.50 R 15 LT	109	7 J	274			109	S	
		7 ½ J	279					
		8 J	284					
		8 ½ J	289	791	268			
		9 J	294					
33 x 12.50 R 15 LT	108	8 ½ J	328			108	S	
		9 J	333					
		9 ½ J	338					
		10 J	343	844	318			
		10 ½ J	348					
		11 J	353					
35 x 12.50 R 15 LT	113	8 ½ J	328			113	S	
		9 J	333					
		9 ½ J	338					
		10 J	343	897	318			
		10 ½ J	348					
		11 J	353					
35 x 12.50 R 18 LT	118	8 ½ J	328			118	S	
		9 J	333					
		9 ½ J	338					
		10 J	343	894	318			
		10 ½ J	348					
		11 J	353					

Load capacity (kg) per axle at a tyre pressure (bar)											Speed Symbol and reference speed (km/h)
		2.5		3.0		3.5	4.0	4.5	5.0	5.5	
		1760 3200		2000 3640		2240 4120	2440 4440	2640 4860	2780 5040	2900 5280	Q 160
		1920 3500		2180 3960		2430 4480	2680 4880	2900 5280	3120 5680	3300 6000	Q 160
		1750 3180		1990 3620		2240 4120	2440 4440	2640 4860	2840 5160	3000 5440	Q 160
	1.7	2.1	2.5	2.8		3.1	3.5				
	1120	1280	1420	1560		1680	1800				S 180
	1270	1450	1600	1760		1910	2060				Q 160 S 180
	1600	1810	2000								S 180
	1850	2080	2300								Q 160
	1650	1880	2120	2300		2480	2640				Q 160

CST 17

CST = Conti Spare Tyre

The space- and weight-saving spare tyre in radial design **for temporary, limited use**. Approved for speeds of up to 50 mph / 80 km/h^{*)}.

This tyre may only be used in an **emergency on one wheel** of the vehicle with the agreement of the vehicle manufacturer. The T in the tyre designation indicates temporary use under restricted conditions.

^{*)} According to UN / ECE-Regulation 64 governing the use of special spare tyres, those with a higher speed rating may also only be used up to a maximum speed of 50 mph / 80 km/h.



Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index	Load capacity ⁷⁾		Width (mm)	Outer-Ø (mm)		
	LI	kg					
95 series							
T 105/95 R 17	90	600	3 J ⁵⁾	110	640	291	1940
			3 ½ J ⁵⁾	115			
T 115/95 R 17	95	690	3 J ⁵⁾	118	658	298	1996
			3 ½ J ⁵⁾	122			
			4 J ⁵⁾	128			
90 series							
T 125/90 R 15	96	710	3 J ⁵⁾	126			
			3 ½ J ⁵⁾	131	617	275	1863
			4 J ⁵⁾	136			
T 115/90 R 16	92	630	3 J ⁵⁾	118	622	281	1885
			3 ½ J ⁵⁾	123			
			4 J ⁵⁾	128			
T 125/90 R 16	98	750	3 J ⁵⁾	126			
			3 ½ J ⁵⁾	131	642	288	1940
			4 J ⁵⁾	136			
T 135/90 R 16	102	850	3 ½ J ⁵⁾	138	660	294	1996
			4 J ⁵⁾	143			
			4 ½ J ⁵⁾	148			
T 145/90 R 16	106	950	3 ½ J	146			
			4 J	151	678	301	2051
			4 ½ J	156			
			5 J	161			
T 135/90 R 17	104	900	3 ½ J ⁵⁾	138	686	307	2075
			4 J ⁵⁾	143			
			4 ½ J ⁵⁾	148			
T 165/90 R 17	105	925	4 J ⁵⁾	167			
			4 ½ J	172	742	329	2241
			5 J	177			
			5 ½ J	182			
T 155/90 R 18	113	1150	4 J ⁵⁾	158			
			4 ½ J ⁵⁾	163	749	333	2263
			5 J ⁵⁾	168			
85 series							
T 125/85 R 16	99	775	3 J ⁵⁾	126			
			3 ½ J ⁵⁾	131	626	283	1897
			4 J ⁵⁾	136			
T 145/85 R 18	103	875	3 ½ J ⁵⁾	146			
			4 J ⁵⁾	151	713	321	2158
			4 ½ J	156			
			5 J ⁵⁾	161			
T 155/85 R 18	115	1215	4 J	158			
			4 ½ J	163	731	327	2213
			5 J	168			

*) Load capacity at **4.2 bar** up to max. 130 km/h. Application-specific speed limited to **80 km/h (50 mph)** in accordance with UN / ECE regulation 64.

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LJ	Load capacity ¹⁾ kg		Width (mm)	Outer-Ø (mm)		
80 series							
T 125/80 R 15	95	690	3 J ⁵⁾	126			
			3 ½ J ⁵⁾	131	589	266	1784
			4 J ⁵⁾	136			
T 125/80 R 16	97	730	3 J ⁵⁾	126			
			3 ½ J ⁵⁾	131	614	278	1860
			4 J ⁵⁾	136			
T 145/80 R 16	105	925	3 ½ J	146			
			4 J	151	648	290	1959
			4 ½ J	156			
			5 J	161			
T 125/80 R 17	99	775	3 J ⁵⁾	126			
			3 ½ J ⁵⁾	131	640	291	1940
			4 J ⁵⁾	136			
T 135/80 R 17	102	850	3 ½ J ⁵⁾	138	656	297	1989
	103	875	4 J ⁵⁾	143			
			4 ½ J ⁵⁾	148			
T 145/80 R 17	107	975	3 ½ J	146			
			4 J	151	674	303	2038
			4 ½ J	156			
			5 J	161			
T 165/80 R 17	104	900	4 J	167			
			4 ½ J	172	704	321	2142
			5 J	177			
			5 ½ J	182			
T 135/80 R 18	104	900	3 ½ J ⁵⁾	138	681	310	2066
			4 J ⁵⁾	143			
			4 ½ J ⁵⁾	148			
T 145/80 R 18	99	775	3 ½ J	146			
			4 J	151	699	316	2115
			4 ½ J	156			
			5 J	161			
T 145/80 R 19	110	1060	3 ½ J	146			
			4 J	151	725	328	2195
			4 ½ J	156			
			5 J	161			
T 155/80 R 19	114	1180	4 J	158			
			4 ½ J	163	741	334	2244
			5 J	168			
T 175/80 R 19	122	1500	4 ½ J	179			
			5 J	184	775	346	2342
			5 ½ J	189			
			6 J	194			

^{*)} Load capacity at **4.2 bar** up to max. 130 km/h. Application-specific speed limited to **80 km/h (50 mph)** in accordance with UN / ECE regulation 64.

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LI	Load capacity ⁷⁾ kg		Width (mm)	Outer-Ø (mm)		
70 series							
T 115/70 R 15	90	600	3 J ⁵⁾	118			
			3 ½ J ⁵⁾	123	549	251	1667
			4 J ⁵⁾	128			
T 125/70 R 15	95	690	3 J ⁵⁾	126			
			3 ½ J ⁵⁾	131	565	256	1710
			4 J ⁵⁾	136			
T 135/70 R 15	99	775	3 ½ J ⁵⁾	139			
			4 J ⁵⁾	144	579	261	1753
			4 ½ J ⁵⁾	149			
T 115/70 R 16	92	630	3 J ⁵⁾	118			
			3 ½ J ⁵⁾	123	574	264	1744
			4 J ⁵⁾	128			
T 125/70 R 16	96	710	3 J ⁵⁾	126			
			3 ½ J ⁵⁾	131	590	269	1787
			4 J ⁵⁾	136			
T 135/70 R 16	100	800	3 ½ J ⁵⁾	139			
			4 J ⁵⁾	144	604	274	1830
			4 ½ J ⁵⁾	149			
T 125/70 R 17	98	750	3 J ⁵⁾	126			
			3 ½ J ⁵⁾	131	616	282	1867
			4 J ⁵⁾	136			
T 145/70 R 17	107	975	3 ½ J ⁵⁾	146			
			4 J ⁵⁾	151			
			4 ½ J ⁵⁾	156	644	292	1953
			5 J ⁵⁾	161			
T 155/70 R 17	110	1060	4 J ⁵⁾	158			
			4 ½ J ⁵⁾	163	658	297	1996
			5 J ⁵⁾	168			
T 125/70 R 18	99	775	3 J ⁵⁾	126			
			3 ½ J ⁵⁾	131	641	294	1943
			4 J ⁵⁾	136			
T 125/70 R 19	100	800	3 J	126			
			3 ½ J	131	667	307	2023
			4 J	136			
T 155/70 R 19	113	1150	4 J ⁵⁾	158			
			4 ½ J ⁵⁾	163	709	323	2152
			5 J ⁵⁾	168			

*) Load capacity at **4.2 bar** up to max. 130 km/h. Application-specific speed limited to **80 km/h (50 mph)** in accordance with UN / ECE regulation 64.

Size	Tyre		Permitted rims ¹⁾ (measuring rim bold)	Tyre dimensions Max. standard value in operation ²⁾		Radius stat. + / - 2 % (mm)	Rolling circumference ³⁾ + 1.5 % - 2.5 % (mm)
	Load Index LJ	Load capacity ¹⁾ kg		Width (mm)	Outer-Ø (mm)		
60 series							
T 125/60 R 18	94	670	3 ½ J	131	613	285	1863
			4 J	136			
			4 ½ J	141			
T 155/60 R 18	107	975	4 ½ J ⁵⁾	163	651	298	1974
			5 J ⁵⁾	168			
			5 ½ J ⁵⁾	173			
T 145/60 R 20	105	925	4 J	151			
			4 ½ J	156	688	319	2094
			5 J	161			
T 165/60 R 20	113	1150	4 ½ J	172	712	328	2167
			5 J	177			
			5 ½ J	182			
			6 J	187			

*) Load capacity at **4.2 bar** up to max. 130 km/h. Application-specific speed limited to **80 km/h (50 mph)** in accordance with UN / ECE regulation 64.

ContiComfortKit

The ContiComfortKit is a tyre emergency set that quickly makes a vehicle mobile again in the event of tyre failure. It seals punctures in passenger car tyres typically caused by for instance nails. Once the puncture has been sealed, the motorist can continue on his journey for up to 200 km (120 miles) at a maximum speed of 80 km/h (50 mph).

Please note:

It may not be possible to seal tyres with extensive damage.

Temporarily sealed tyres must be inspected by a tyre specialist as soon as possible.

Be sure to observe the applicable regulations in your country.

Information about repairing tyres can be found on [page 114](#) of this databook.



Compressor and tyre sealant integrated in one unit

Powered by the vehicle electric system (12 V, 15 A fuse)

Integrated lamp and safety reflector, illuminated pressure gauge and display

Weight approx. 2.3 kg, dimensions 180 x 240 x 95 mm

Sealant lasts for 4 years (see expiration date on the emergency set or the bottle)

Can be replaced and disposed of by specialized dealers

Available products:

ContiComfortKit - complete tyre emergency set

Repair set - bottle with sealant, hose, adapter

Further information available in Internet under www.conticomfortkit-shop.co.uk



ContiVanContact™ 100

For MPVs and vans

- › High level of efficiency thanks to higher mileage
- › Improved durability on all roads and thus longer service life
- › High safety reserves for heavy loads

Tyre dimensions^{*)}

- › Tyre width 175-235 mm
- › Rim size 14-16 inch
- › Speed Symbol Q/R/S/T/H
- › Tyre cross-section series 55-80



ContiVanContact™ 200

For MPVs and vans

- › Safe journey thanks to shorter braking distances on wet roads
- › Safe handling in all situations, even under heavy loads
- › Considerably reduced rolling resistance for lower fuel consumption and greater efficiency

Tyre dimensions^{*)}

- › Tyre width 185-235 mm
- › Rim size 15-17 inch
- › Speed Symbol R/T/H/V
- › Tyre cross-section series 55-75



Vanco™ 2

For MPVs and vans

- › Perceptible car-orientated handling
- › Excellent wet braking performance
- › Outstanding protection against aquaplaning

Tyre dimensions *)

- › Tyre width 175-235 mm
- › Rim size 14-17 inch
- › Speed Symbol P / Q / R / T
- › Tyre cross-section series 60-80



Vanco™ Contact 2

For transporters and vans

- › Excellent handling
- › Precise braking reaction and reduced stopping distance
- › High aquaplaning safety

Tyre dimensions *)

- › Tyre width 165-225 mm
- › Rim size 13-16 inch
- › Speed Symbol R / T / H
- › Tyre cross-section series 60-70



Vanco™ Eco

For MPVs and vans

- › Cost-effective due to optimised rolling resistance
- › Short braking distances, even on wet surfaces
- › Car-like handling

Tyre dimensions *)

- › Tyre width 195-235 mm
- › Rim size 16 inch
- › Speed Symbol R / T
- › Tyre cross-section series 60-75



Vanco™ Camper

For motorhomes

- › Robust construction for improved durability in rough camping environments
- › Reduced stopping distance on wet surfaces
- › Extra driving stability for rear-heavy camper vans

Tyre dimensions *)

- › Tyre width 195-235 mm
- › Rim size 15-16 inch
- › Speed Symbol R
- › Tyre cross-section series 65-75



VanContact™ Winter **NEW**

The reliable winter expert: safe and efficient.
For vans and transporters

- › Shorter braking distances and improved traction on snow
- › High aquaplaning safety and shorter braking distances on wet roads
- › Improved rolling resistance

Tyre dimensions*)

- › Tyre width 165-235 mm
- › Rim size 14-17 inch
- › Speed Symbol Q/R/T/H
- › Tyre cross-section series 55-80



M+S



Vanco™ Winter 2

For vans, transporters and mobile homes

- › Optimised braking effect on snow and ice
- › Car-orientated handling on snow
- › Excellent aquaplaning protection and safe handling in wet conditions

Tyre dimensions*)

- › Tyre width 165-235 mm
- › Rim size 14-17 inch
- › Speed Symbol Q/R/T/H
- › Tyre cross-section series 55-80



M+S



Snowflake designation:

This additional marking on an M+S tyre shows that the tyre meets prescribed test criteria and ensures good winter properties.

Size	Tyre		Rim ⁷⁾ (measuring rim bold)	TL valve (tube and valve) ⁷⁾	Tyre dimensions				new		Radius stat. + / - 2 % (mm)	Rolling circumference + 1.5 % - 2.5 % (mm)	
	PR	Service description ⁶⁾			Max. standard value in operation ⁸⁾				Width	Outer-Ø			
					Width Stand-ard	Spe-cial	Stand-ard	Spe-cial					
13 inch													
165 R 13 C	6	91/89 R	4 J	43 GS 11.5	167	175	604	609	162	596	273	1806	
			4 ½ J		172	180			167				
			5 J		177	185			172				
165/70 R 13 C	6	88/86 R	4 ½ J ⁹⁾	43 GS 11.5	172		572	576	165	562	258	1703	
			5 J		177				170				
14 inch													
175 R 14 C	8	99/98 P	4 ½ J	43 GS 11.5	178	187	642	648	173	634	293	1921	
		99/98 Q	5 J		183	192			178				
		99/98 R	5 ½ J		188	197			183				
185 R 14 C	6	99/97 Q	5 J	43 GS 11.5	189	198	659	665	183	650	299	1970	
	8	102/100 Q	5 ½ J		194	203			188				
		102/100 R	6 J		199	208			193				
195 R 14 C	8	106/104 Q	5 J	43 GS 11.5	199	209	675	682	193	666	306	2018	
	10	106/104 R	5 ½ J		204	214			198				
		110/108 S	6 J		209	219			203				
205 R 14 C	8	109/107 P	5 ½ J	43 GS 11.5	209	220	696	703	203	686	312	2079	
			6 J		214	225			208				
			6 ½ J		219	230			213				
215 R 14 C	8	112/110 P	5 ½ J	(43 GS 11.5)	220	230	710	717	213	700	319	2121	
			6 J		225	235			218				
			6 ½ J		230	240			223				
165/75 R 14 C	8	97/95 R	4 J	TR 600 XHP, TR 602 HP	167	614	618	160	604	277	1830		
			4 ½ J		172							165	
			5 J		177							170	
185/75 R 14 C	8	102/100 Q	5 J	TR 600 XHP, TR 602 HP	191	646	-	184	634	289	1921		
			5 ½ J		196			189					
			6 J		201			194					
195/75 R 14 C	8	106/104 Q	5 J	TR 600 XHP, TR 602 HP	199	666	-	191	648	295	1963		
			5 ½ J		204			196					
			6 J		209			201					
165/70 R 14 C	6	89/87 R	4 ½ J	43 GS 11.5	172	598	602	165	588	270	1782		
			5 J		177			170					
175/70 R 14 C	6	95/93 T	4 ½ J	43 GS 11.5	179	612	616	172	602	276	1824		
			5 J		184			177					
			5 ½ J		189			182					

PR	Load Index	Wheel position ⁹⁾	Load capacity (kg) per axle at a tyre pressure (bar)														Speed Symbol and reference speed (km/h)	
			3.0	3.25	3.5	3.75	4.0	4.25	4.5	4.75	5.0	5.25	5.5	5.75	6.0			
6	91	S	1030	1095	1165	1230												R 170
	89	T	1940	2070	2195	2320												
6	88	S	935	1000	1060	1120												R 170
	86	T	1775	1890	2005	2120												
8	99	S	1120	1195	1270	1340	1410	1480	1550									P 150 Q 160 R 170
	98	T	2170	2310	2450	2590	2730	2865	3000									
6	99	S	1295	1380	1465	1550												Q 160 R 170
	97	T	2445	2605	2765	2920												
8	102	S	1230	1310	1390	1470	1545	1625	1700									Q 160 R 170
	100	T	2315	2465	2620	2765	2915	3060	3200									
6	102	S	1420	1515	1605	1700												Q 160 R 170 S 180
	100	T	2675	2855	3030	3200												
8	106	S	1375	1465	1555	1645	1730	1815	1900									S 180
	104	T	2605	2775	2945	3110	3275	3440	3600									
10	110	S	1355	1445	1535	1620	1705	1790	1875	1955	2040	2120						Q 160 R 170 S 180
	108	T	2555	2725	2890	3055	3220	3380	3535	3690	3845	4000						
8	109	S	1490	1590	1685	1780	1875	1970	2060									P 150
	107	T	2820	3005	3190	3370	3550	3725	3900									
8	112	S	1620	1725	1830	1935	2040	2140	2240									P 150
	110	T	3065	3270	3470	3665	3860	4050	4240									
8	97	S	1010	1080	1145	1210	1270	1335	1400	1460								R 170
	95	T	1910	2035	2160	2285	2405	2525	2645	2760								
8	102	S	1175	1255	1330	1405	1480	1555	1630	1700								Q 160
	100	T	2215	2360	2505	2650	2790	2930	3065	3200								
8	106	S	1315	1405	1490	1575	1655	1740	1820	1900								Q 160
	104	T	2495	2655	2820	2980	3140	3295	3450	3600								
6	89	S	970	1035	1100	1160												R 170
	87	T	1825	1945	2065	2180												
6	95	S	1150	1230	1305	1380												T 170
	93	T	2175	2315	2460	2600												

Size	Tyre		Rim ⁷⁾ (measuring rim bold)	TL valve (tube and valve) ⁷⁾	Tyre dimensions						Radius stat. + / - 2 % (mm)	Rolling circumference + 1.5 % - 2.5 % (mm)						
	PR	Service description ⁶⁾			Max. standard value in operation ⁸⁾				new									
					Width		Outer-Ø		Width	Outer-Ø								
Stand-ard	Spe-cial	Stand-ard	Spe-cial	Stand-ard	Spe-cial	Width	Outer-Ø											
14 inch																		
195/70 R 14 C	8	101/99 R (104 N)	5 J			199			191									
			5 ½ J			204			196									
			6 J			209			201					630	287	1909		
175/65 R 14 C	6	90/88 T	5 J	43 GS 11.5		186	594	598	177	584	269	1770						
			5 ½ J			191			182									
15 inch																		
185 R 15 C	8	103/102 R	5 J	43 GS 11.5		189	198	683	183	674	312	2042						
			5 ½ J			194	203		188									
			6 J			199	208		193									
195 R 15 C	8	106/104 S	5 J	43 GS 11.5		201	703	-	193	690	318	2091						
		106/104 R	5 ½ J			206			198									
			6 J			211			203									
215/80 R 15 C	8	111/109 S	5 ½ J			220	739	745	211	725	328	2197						
			6 J			225			216									
			6 ½ J			230			221									
			7 J			235			216									
245/75 R 15 C	6	109/107 S	6 ½ J			253	763	771	248	749	338	2269						
			7 J			258			263									
			7 ½ J															
175/70 R 15 C	8	97/95 T	4 ½ J	43 GS 11.5 (1540, 38 G 11.5)		179	637	641	172	627	289	1900						
			5 J			184			177									
			5 ½ J			189			182									
195/70 R 15 C	6	100/98 R (97 T)	5 J	43 GS 11.5		199			191									
		5 ½ J	204			196												
	8	6 J	209			665			671					201	655	300	1985	
		104/102 Q (100 R)																
		104/102 R																
		104/102 S																
		104/102 R (100 T)																
104/102 R (97 T)																		
205/70 R 15 C	8	106/104 R 106/104 S	5 ½ J	43 GS 11.5		212	681	687	204	669	305	2027						
			6 J			217			209									
			6 ½ J			222			214									
215/70 R 15 C	6	106/104 S	5 ½ J	43 GS 11.5		220			211									
			6 J			225			216									
	8	109/107 R	6 J			TR 600 XHP,			695					701	221	683	311	2069
		109/107 S	6 ½ J			TR 600 HP												
215/70 R 15 CP	8	109 R	7 J	TR 600 XHP, TR 602 HP, 40 MS														

PR	Load Index	Wheel position ⁹⁾	Load capacity (kg) per axle at a tyre pressure (bar)													Speed Symbol and reference speed (km/h)
			3.0	3.25	3.5	3.75	4.0	4.25	4.5	4.75	5.0	5.25	5.5	5.75	6.0	
8	101	S	1140	1220	1290	1365	1440	1510	1580	1650						R 170
	99	T	2145	2290	2430	2565	2700	2835	2970	3100						N 140
	104	S	1150	1225	1300	1375	1450	1520	1590	1660	1730	1800				
6	90	S	1005	1070	1135	1200									T 190	
	88	T	1875	2000	2120	2240										
8	103	S	1265	1350	1435	1515	1595	1675	1750						R 170	
	102	T	2460	2620	2780	2940	3095	3250	3400							
8	106	S	1375	1465	1555	1645	1730	1815	1900						R 170	
	104	T	2605	2775	2945	3110	3275	3440	3600							
8	111	S	1510	1610	1705	1805	1900	1995	2090	2180					S 180	
	109	T	2855	3040	3225	3410	3590	3770	3945	4120						
6	109	S	1725	1835	1950	2060									S 180	
	107	T	3260	3480	3690	3900										
8	97	S	1055	1125	1195	1260	1330	1395	1460						T 190	
	95	T	1995	2125	2225	2385	2510	2635	2760							
6	100	S	1340	1425	1515	1600									Q 160 R 170 S 180 (T 190)	
	98	T	2510	2675	2840	3000										
	97	S	1220	1300	1380	1460										
8	104	S	1300	1385	1470	1555	1640	1720	1800							
	102	T	2460	2620	2780	2940	3095	3250	3400							
	97	S	1220	1300	1380	1460										
	100	S	1340	1430	1480	1600										
8	106	S	1375	1465	1555	1640	1730	1815	1900						R 170	
	104	T	2605	2775	2945	3110	3275	3440	3600						S 180	
6	106	S	1590	1695	1800	1900									R 170 S 180	
	104	T	3010	3210	3405	3600										
8	109	S	1490	1590	1685	1780	1875	1970	2060							
	107	T	2820	3005	3190	3370	3550	3725	3900							
8	109	FA S	1425	1520	1615	1705	1795	1885	1975	2060						
	109	RA S	1270	1350	1435	1516	1595	1675	1755	1830	1910	1985	2060			
	1.85x109	RA T	2640	2810	2985	3155	3320	3485	3650	3810						

Size	Tyre		Rim ⁷⁾ (measuring rim bold)	TL valve (tube and valve) ⁷⁾	Tyre dimensions				new		Radius stat. + / - 2 % (mm)	Rolling circumference + 1.5 % - 2.5 % (mm)
	PR	Service description ⁶⁾			Max. standard value in operation ⁸⁾				Width	Outer-Ø		
					Stand-ard	Spe-cial	Stand-ard	Spe-cial				
15 inch												
225/70 R 15 C	6	109/107 R	6 J	43 GS 11.5	232	709	715	223	697	317	2112	
	8	112/110 Q	6 ½ J		237			228				
		112/110 R	7 J		242			233				
		112/110 R (115 N)										
205/65 R 15 C	6	102/100 R	5 ½ J	43 GS 11.5	212	657	663	204	647	297	1960	
		102/100 T	6 J		217			209				
			6 ½ J		222			214				
215/65 R 15 C	6	104/102 T	6 J	43 GS 11.5	225	673	677	216	661	302	2003	
			6 ½ J		230			221				
			7 J		235			226				
185/60 R 15 C	6	94/92 T	5 ½ J	43 GS 11.5	197	611	617	189	603	279	1827	
			6 J		202			194				
185/55 R 15 C	6	90/88 T	5 ½ J	43 GS 11.5	197	593	598	189	585	272	1773	
			6 J		202			194				
16 inch												
235/85 R 16 C	8	114/111 S	6 J		239	822	830	230	806	363	2442	
	10	120/116 Q	6 ½ J		244			235				
		120/116 S	7 J		249			240				
			7 ½ J		254			245				
205 R 16 C	8	110/108 R	5 ½ J	43 GS 11.5	211	750	756	203	736	338	2230	
			6 J		216			208				
			6 ½ J		221			213				
175/75 R 16 C	8	101/99 R	4 ½ J	TR 600 XHP, TR 602 HP	179	678	684	172	668	308	2024	
			5 J		184			177				
			5 ½ J		189			182				
185/75 R 16 C	8	104/102 R	5 J	TR 600 XHP, TR 602 HP	191	696	700	184	684	314	2073	
			5 ½ J		196			189				
			6 J		201			194				
195/75 R 16 C	8	107/105 R	5 J	TR 600 XHP, TR 602 HP	199	710	716	191	698	320	2115	
		107/105 T	5 ½ J		204			196				
	10	110/108 R	6 J		209			201				
195/75 R 16 CP	8	107 R		TR 600 XHP, TR 602 HP, 40 MS								
205/75 R 16 C	8	110/108 R	5 ½ J	TR 600 XHP, TR 602 HP	211	726	732	203	714	326	2163	
	10	113/111 R	6 J		216			208				
					6 ½ J			221				213

PR	Load Index	Wheel position ⁹⁾	Load capacity (kg) per axle at a tyre pressure (bar)													Speed Symbol and reference speed (km/h)	
			3.0	3.25	3.5	3.75	4.0	4.25	4.5	4.75	5.0	5.25	5.5	5.75	6.0		
6	109	S	1725	1835	1950	2060											R 170 (N 140)
	107	T	3260	3480	3690	3900											
	8	112	S	1620	1725	1830	1935	2040	2140	2240							
	110	T	3065	3270	3470	3665	3860	4050	4240								
	115	S	1680	1790	1900	2010	2115	2220	2325	2430							
6	102	S	1420	1515	1605	1700											R 170 T 190
	100	T	2675	2855	3030	3200											
6	104	S	1505	1605	1700	1800											T 190
	102	T	2840	3030	3215	3400											
6	94	S	1120	1195	1270	1340											T 190
	92	T	2110	2245	2385	2520											
6	90	S	1005	1070	1135	1200											T 190
	88	T	1875	2000	2120	2240											
8	114	S	1635	1740	1850	1955	2055	2160	2260	2360							Q 160 S 180
	111	T	3020	3220	3415	3610	3800	3990	4175	4360							
	10	120	S	1665	1775	1880	1990	2059	2200	2300	2405	2505	2605	2700	2800		
	116	T	2970	3170	3360	3550	3740	3925	4110	4290	4470	4650	4825	5000			
8	110	S	1535	1635	1735	1830	1930	2025	2120								R 170 S 180 T 190
	108	T	2890	3085	3270	3455	3640	3820	4000								
8	101	S	1140	1215	1290	1360	1435	1505	1575	1650							R 170
	99	T	2145	2290	2430	2565	2700	2835	2970	3100							
8	104	S	1245	1330	1410	1490	1570	1645	1725	1800							R 170
	102	T	2355	2510	2665	2815	2965	3110	3255	3400							
8	107	S	1350	1440	1525	1615	1700	1785	1865	1950							R 170 T 190
	105	T	2560	2730	2900	3060	3225	3385	3545	3700							
	10	110	S	1355	1445	1535	1620	1705	1790	1875	1955	2040	2120				
	108	T	2555	2725	2890	3055	3220	3380	3535	3690	3845	4000					
8	107	FA S	1350	1440	1525	1615	1700	1785	1865	1950							R 170
	107	RA S	1200	1280	1360	1435	1510	1585	1660	1735	1805	1880	1950				
1.85x107	RA T	2500	2665	2830	2990	3145	3300	3455	3610								
8	110	S	1470	1565	1660	1755	1850	1940	2030	2120							R 170
	108	T	2770	2955	3135	3310	3485	3660	3830	4000							
10	113	S	1470	1565	1665	1755	1850	1940	2035	2125	2210	2300					R 170
	111	T	2785	2970	3150	3330	3510	3680	3855	4025	4195	4360					

* (Valves) see page 86

See cover foldout for footnotes

Size	Tyre		Rim ⁷⁾ (measuring rim bold)	TL valve (tube and valve) ⁷⁾	Tyre dimensions				new		Radius stat. + / - 2 % (mm)	Rolling circumference + 1.5 % - 2.5 % (mm)
	PR	Service description ⁶⁾			Max. standard value in operation ⁸⁾		Outer-Ø	Width	Outer-Ø			
					Stand-ard	Spe-cial				Stand-ard		
16 inch												
215/75 R 16 C	8	113/111 R	5 ½ J	TR 600 XHP,	220			211				
	10	116/114 N	6 J	TR 602 HP	225	740	748	216	728	332	2206	
		116/114 R	6 ½ J		230			221				
				7 J	TR 600 XHP, TR 602 HP, 40 MS	235			226			
225/75 R 16 C	8	116/114 N (110 S)	6 J	TR 600 XHP,	232	758	764	223	744	338	2254	
		116/114 R (118/116 P)	6 ½ J	TR 602 HP, 40 MS	237			228				
		116 R	7 J	40 MS	242			233				
	10	118/116 R										
		121/120 N										
		121/120 R (118 R)										
	121/120 R											
225/75 R 16 CP	8	116 R		TR 600 XHP, TR 602 HP, 40 MS								
215/70 R 16 C	6	108/106 S	5 ½ J	43 GS 11.5	220			211				
		108/106 T	6 J		225			216				
			6 ½ J		230	720	726	221	708	324	2145	
			7 J		235			226				
195/65 R 16 C	6	100/98 T	5 ½ J	TR 600 XHP,	204			196				
	8	104/102 R	6 J	TR 602 HP	209	670	676	201	660	305	2000	
		104/102 R (100 R)										
		104/102 T										
		104/102 T (100 T)										

PR	Load Index	Wheel position ⁹⁾	Load capacity (kg) per axle at a tyre pressure (bar)													Speed Symbol and reference speed (km/h)
			3.0	3.25	3.5	3.75	4.0	4.25	4.5	4.75	5.0	5.25	5.5	5.75	6.0	
8	113	S	1590	1700	1800	1905	2005	2105	2205	2300						N 140 R 170
	111	T	3020	3220	3415	3610	3800	3990	4175	4360						
	10	116	S	1600	1705	1805	1910	2010	2110	2210	2310	2405	2500			
	114	T	3015	3215	3410	3605	3795	3985	4170	4355	4540	4720				
10	116	FA S	1600	1705	1805	1910	2010	2110	2210	2310	2405	2500				N 140 R 170 (S 180) (P 150)
	116	RA S	1600	1705	1805	1910	2010	2110	2210	2310	2405	2500	2500	2500	2500	
	114	RA T	3015	3215	3410	3605	3795	3985	4170	4355	4540	4720	4720	4720	4720	
8	116	S	1730	1845	1960	2070	2180	2285	2395	2500						N 140 R 170 (S 180) (P 150)
	114	T	3270	3485	3695	3905	4115	4320	4520	4720						
	110	S	1605	1710	1815	1920	2020	2120								
	116	S	1730	1845	1960	2070	2180	2285	2395	2500						
	114	T	3270	3485	3695	3905	4115	4320	4520	4720						
	118	S	1685	1800	1910	2015	2125	2230	2335	2435	2540	2640				
	116	T	3195	3410	3615	3820	4020	4220	4420	4615	4810	5000				
10	118	S	1685	1800	1910	2015	2125	2230	2335	2435	2540	2640				N 140 R 170 (S 180) (P 150)
	116	T	3195	3410	3615	3820	4020	4220	4420	4615	4810	5000				
	121	S	1725	1835	1950	2060	2170	2275	2385	2490	2595	2695	2800	2900		
	120	T	3330	3550	3765	3980	4190	4395	4605	4805	5010	5205	5405	5600		
8	116	FA S	1730	1845	1960	2070	2180	2285	2395	2500						S 180 T 190
	116	RA S	1540	1640	1740	1840	1940	2035	2130	2225	2315	2410	2500			
	1.85x116	RA T	3200	3415	3625	3830	4030	4230	4430	4625						
6	108	S	1675	1785	1895	2000										S 180 T 190
	106	T	3180	3390	3595	3800										
6	100	S	1340	1425	1515	1600										R 170 T 190
	98	T	2510	2675	2840	3000										
8	104	S	1245	1330	1410	1490	1570	1645	1725	1800						R 170 T 190
	102	T	2355	2510	2665	2815	2965	3110	3255	3400						
	100	S	1340	1425	1515	1600										

Size	Tyre		Rim ⁷⁾ (measuring rim bold)	TL valve (tube and valve) ⁷⁾	Tyre dimensions				new		Radius stat. + / - 2 % (mm)	Rolling circumference + 1.5 % - 2.5 % (mm)	
	PR	Service description ⁶⁾			Max. standard value in operation ⁸⁾				Width	Outer-Ø			
					Stand-ard	Spe-cial	Stand-ard	Spe-cial					
16 inch													
205/65 R 16 C	6	103/101 T (99 H)	5 ½ J	43 GS 11.5	212	682	686	204	672	310	2036		
		103/101 H	6 J									217	222
		107/105 R	6 ½ J										
	8	107/105 R (103 R)	TR 600 XHP, TR 602 HP										
		107/105 R (103 T)											
		107/105 T											
		107/105 T (103 T)											
		107/105 T (103 H)											
215/65 R 16 C	4	102/100 T	6 J	43 GS 11.5	225	698	702	216	686	315	2079		
		102/100 H	6 ½ J									230	235
		106/104 T	7 J										
	6	109/107 P	TR 600 XHP, TR 602 HP										
		109/107 R											
		109/107 R (106 R)											
		109/107 R (106 T)											
		109/107 R (106/104 T)											
109/107 T													
225/65 R 16 C	8	112/110 S	6 J	TR 600 XHP, TR 602 HP	232	710	716	223	698	320	2115		
		112/110 R	6 ½ J									237	242
225/65 R 16 CP	8	112 R	7 J	TR 600 XHP, TR 602 HP, 40 MS									
235/65 R 16 C	8	115/113 S (118/116 R)	6 ½ J	TR 600 XHP, TR 602 HP, 40 MS	245	724	730	235	712	325	2157		
		115/113 R	7 J									250	255
		118/116 R (115/113 S)	7 ½ J										
	10	121/119 N (118 N)	40 MS										
		121/119 N (118 R)											
		121/119 R											
235/65 R 16 CP	8	115 R		TR 600 XHP, TR 602 HP, 40 MS									

PR	Load Index	Wheel position ⁹⁾	Load capacity (kg) per axle at a tyre pressure (bar)													Speed Symbol and reference speed (km/h)		
			3.0	3.25	3.5	3.75	4.0	4.25	4.5	4.75	5.0	5.25	5.5	5.75	6.0			
6	103	S	1465	1560	1655	1750												R 170 T 190 H 210
	101	T	2760	2940	3120	3300												
	99	S	1455	1550														
8	107	S	1350	1440	1525	1615	1700	1785	1865	1950								
	105	T	2560	2730	2900	3060	3225	3385	3545	3700								
	103	S	1465	1560	1655	1750												
4	102	S	1595	1700														P 150 R 170 T 190 H 210
	100	T	3000	3200														
	6	106	S	1590	1695	1800	1900											
104		T	3010	3210	3405	3600												
8	109	S	1425	1520	1615	1705	1795	1885	1975	2060								
	107	T	2700	2880	3055	3230	3400	3570	3735	3900								
8	112	S	1550	1655	1755	1855	1950	2050	2145	2240								R 170 S 180
	110	T	2935	3130	3320	3510	3695	3880	4060	4240								
8	112	FA S	1550	1655	1755	1855	1950	2050	2145	2240								
	112	RA S	1380	1470	1560	1650	1735	1825	1910	1990	2075	2160	2240					
1.85x112	RA T	2870	3060	3245	3430	3615	3790	3970	4145									
8	115	S	1680	1795	1905	2010	2120	2225	2330	2430								N 140 R 170 S 180
	113	T	3185	3395	3605	3805	4010	4210	4405	4600								
10	121	S	1725	1835	1950	2060	2170	2275	2385	2490	2595	2695	2800	2900				
	119	T	3235	3445	3655	3865	4070	4270	4470	4670	4865	5060	5250	5440				
	118	S	1685	1800	1910	2015	2125	2230	2335	2435	2540	2640						
8	115	FA S	1680	1795	1905	2010	2120	2225	2330	2430								
	115	RA S	1495	1595	1695	1790	1885	1975	2070	2160	2250	2340	2430					
1.85x115	RA T	3110	3320	3520	3720	3920	4110	4305	4495									

Size	Tyre		Rim ⁷⁾ (measuring rim bold)	TL valve (tube and valve) ⁷⁾	Tyre dimensions				Radius stat. + / - 2 % (mm)	Rolling circumference + 1.5 % - 2.5 % (mm)	
	PR	Service description ⁶⁾			Max. standard value in operation ⁸⁾		new				
					Width Stand- ard	Spec- ial	Outer-Ø Stand- ard	Spec- ial			Width
16 inch											
285/65 R 16 C	10	128 N (121 R) (123 R)	8 J	TR 600 XHP, TR 602 HP, 40 MS	299	790	798	287	776	351	2351
			8 ½ J		304			292			
			9 J		309			297			
195/60 R 16 C	6	99/97 T 99/97 H	5 ½ J	43 GS 11.5	204	650	654	196	640	297	1939
			6 J		209			201			
			6 ½ J		214			206			
205/60 R 16 C	6	100/98 T	6 J 6 ½ J	43 GS 11.5	217 222	-	666	209 214	652	302	1976
215/60 R 16 C	6	103/101 R 103/101 T	6 J	43 GS 11.5	225	674	680	216	664	306	2012
			6 ½ J		230			221			
			7 J		235			226			
225/60 R 16 C	6	101/99 H	6 ½ J	43 GS 11.5	237	686	-	228	676	311	2048
		105/103 H	7 J		242			233			
		105/103 H (101 H)	7 ½ J		247			238			
		8	111/109 T (105 H)								
17 inch											
185/60 R 17 C	6	96/94 R	5 ½ J 6 J	43 GS 11.5	197 202	662	668	189 194	654	305	1982
215/60 R 17 C	6	104/102 H	6 J	43 GS 11.5	225	700	706	216	690	319	2091
		8	6 ½ J		230			221			
		109/107 T (104 H)	7 J		235			226			
235/60 R 17 C	10	117/115 R	6 ½ J 7 J 7 ½ J	TR 600 XHP, TR 602 HP, 40 MS	245 250 255	726	730	235 240 245	714	329	2163
225/55 R 17 C	6	104/102 H	6 ½ J	43 GS 11.5	237	690	-	228	680	315	2060
		8	7 J		242			233			
		109/107 T (104 T) 109/107 H (104 H)	7 ½ J		247			238			
255/55 R 17 C	10	118/116 R	7 ½ J 8 J 8 ½ J	TR 600 XHP, TR 602 HP, 40 MS	271 276 281	724	728	260 265 270	712	328	2157
18 inch											
255/55 R 18 C	8	116/114 T	7 ½ J 8 J 8 ½ J	43 GS 11.5	271 276 281	749	753	260 265 270	737	341	2233

*) 43 GS 11.5 are snap-in valves approved for up to 4.5 bar.

38 G 11.5 is a valve for the hose.

Standard rubber valves are only approved for up to 4.5 bar **in service**.

TR 600 XHP and TR 602 HP (ETRTO V3.23.1+2) are reinforced snap-in valves approved for up to 5.5 bar.

40 MS (ETRTO V2.04.1, V2.05.1) are metal valves approved for pressures up to 6 bar and higher.

PR	Load Index	Wheel position ⁹⁾	Load capacity (kg) per axle at a tyre pressure (bar)														Speed Symbol and reference speed (km/h)	
			3.0	3.25	3.5	3.75	4.0	4.25	4.5	4.75	5.0	5.25	5.5	5.75	6.0			
10	128	S	2300	2455	2605	2750	2895	3040	3180	3325	3460	3600						N 140
	123	S	2060	2195	2330	2465	2595	2720	2850	2975	3100							R 170
	121	S	2010	2140	2270	2400	2525	2655	2775	2900								
6	99	S	1295	1380	1465	1550												T 190
	97	T	2445	2605	2765	2920												H 210
6	100	S	1240	1425	1515	1600												T 190
	98	T	2510	2675	2840	3000												
6	103	S	1460	1560	1655	1750												R 170
	101	T	2760	3940	3120	3300												T 190
6	101	S	1550	1650														T 190
	99	T	2900	3100														H 210
	105	S	1550	1650	1750	1850												
	103	T	2930	3120	3310	3500												
8	111	S	1510	1610	1705	1805	1900	1995	2090	2180								
	109	T	2855	3040	3225	3410	3590	3770	3945	4120								
	105	S	1550	1650	1750	1850												
6	96	S	1190	1265	1345	1420												R 170
	94	T	2240	2390	2535	2680												
6	104	S	1505	1605	1705	1800												R 170
	102	T	2845	3030	3215	3400												T 190
8	109	S	1425	1520	1615	1705	1795	1885	1975	2060								H 210
	107	T	2700	2880	3055	3230	3400	3570	3735	3900								
	104	S	1505	1605	1705	1800												
10	117	S	1640	1750	1860	1965	2070	2170	2270	2370	2470	2570						R 170
	115	T	3105	3310	3515	3715	3910	4105	4295	4485	4675	4860						
6	104	S	1505	1605	1705	1800												T 190
	102	T	2845	3030	3215	3400												H 210
8	109	S	1425	1520	1615	1705	1795	1885	1975	2060								
	107	T	2700	2880	3055	3230	3400	3570	3735	3900								
	104	S	1505	1605	1705	1800												
10	118	S	1685	1800	1910	2015	2125	2230	2335	2435	2540	2640						R 170
	116	T	3195	3405	3615	3820	4020	4220	4420	4615	4810	5000						
8	116	S	1730	1845	1955	2065	2175	2285	2390	2500								T 190
	114	T	3265	3480	3695	3905	4110	4315	4520	4720								

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
82/80 series			
175 R 13	86	585	2.6
125/80 R 13	65	320	2.6
135/80 R 13	70	370	2.6
145/80 R 13	75	425	2.6
155/80 R 13	79	480	2.6
155/80 R 13 Rf.	83	535	3.1
165/80 R 13	83	535	2.6
165/80 R 13 Rf.	87	600	3.1
145/80 R 14	76	440	2.6
165/80 R 14	85	565	2.6
175/80 R 14	88	615	2.6
185/80 R 14	91	675	2.6
165/80 R 15	87	600	2.6
195/80 R 15	96	780	2.6
215/80 R 15	102	935	2.6
205/80 R 16 XL	104	990	3.0
75 series			
205/75 R 15	97	805	2.7
215/75 R 15	100	880	2.7
225/75 R 15	102	935	2.7
P 235/75 R 15	105	1020	2.7
235/75 R 15 XL	109	1135	3.1
265/75 R 15	112	1230	2.7
215/75 R 16 XL	107	1070	3.1
225/75 R 16	104	990	2.7
225/75 R 16 XL	108	1100	3.1
P 235/75 R 16	106	1045	2.7
235/75 R 16	108	1100	2.7
235/75 R 16 XL	112	1230	3.1
245/75 R 16	111	1200	2.7
265/75 R 16	116	1375	2.7
235/75 R 17	109	1135	2.7
70 series			
135/70 R 13	68	345	2.7
145/70 R 13	71	380	2.7
155/70 R 13	75	425	2.7

Conditions of use:

An increase of 10% resp. 5% for C tyres over the load capacity, as quoted in these tables, is permitted when tyres are fitted to caravans and light trailers with a maximum operating speed up to 100 km/h (62 mph). The basic inflation pressure for passenger tyres should be increased by 0.2 bar, as quoted in these tables.

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
70 series			
165/70 R 13	79	480	2.7
165/70 R 13 XL / Rf.	83	535	3.1
175/70 R 13	82	525	2.7
175/70 R 13 XL	86	585	3.1
185/70 R 13	86	585	2.7
155/70 R 14	77	455	2.7
165/70 R 14	81	510	2.7
165/70 R 14 XL / Rf.	85	565	3.1
175/70 R 14	84	550	2.7
175/70 R 14 XL	88	615	3.1
185/70 R 14	88	615	2.7
185/70 R 14 XL	92	695	3.1
195/70 R 14	91	675	2.7
205/70 R 14	95	760	2.7
205/70 R 14 XL	98	825	3.1
135/70 R 15	70	370	2.7
155/70 R 15	78	470	2.7
195/70 R 15 Rf.	97	805	3.1
205/70 R 15	96	780	2.7
215/70 R 15	98	825	2.7
225/70 R 15	100	880	2.7
235/70 R 15	103	960	2.7
255/70 R 15	108	1100	2.7
265/70 R 15	112	1230	2.7
195/70 R 16	94	735	2.7
205/70 R 16	97	805	2.7
P 215/70 R 16	99	855	2.7
215/70 R 16	100	880	2.7
225/70 R 16	102	935	2.7
	103	965	2.7
225/70 R 16 XL	107	1070	3.1
P 235/70 R 16	104	990	2.7
235/70 R 16	105	1020	2.7
245/70 R 16	107	1070	2.7
245/70 R 16 XL	111	1200	3.1
255/70 R 16	111	1200	2.7
265/70 R 16	112	1230	2.7
275/70 R 16	114	1300	2.7
225/70 R 17 XL	108	1100	3.1
235/70 R 17 XL	111	1200	3.1
P 245/70 R 17	108	1100	2.7
245/70 R 17	110	1165	2.7
P 255/70 R 17	110	1165	2.7
255/70 R 17	112	1230	2.7

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
65 series			
P 265/70 R 17	113	1265	2.7
265/70 R 17	115	1335	2.7
265/70 R 18	116	1375	2.7
155/65 R 13	73	400	2.7
165/65 R 13	77	455	2.7
175/65 R 13	80	495	2.7
155/65 R 14	75	425	2.7
165/65 R 14	79	480	2.7
175/65 R 14	82	525	2.7
175/65 R 14 XL / Rf.	86	585	3.1
185/65 R 14	86	585	2.7
185/65 R 14 XL	90	660	3.1
195/65 R 14	89	640	2.7
145/65 R 15	72	390	2.7
155/65 R 15	77	455	2.7
165/65 R 15	81	510	2.7
175/65 R 15	84	550	2.7
175/65 R 15 XL	88	615	3.1
185/65 R 15	88	615	2.7
185/65 R 15 XL	92	695	3.1
195/65 R 15	91	675	2.7
195/65 R 15 XL / Rf.	95	760	3.1
205/65 R 15	94	735	2.7
205/65 R 15 XL / Rf.	99	855	3.1
215/65 R 15	96	780	2.7
215/65 R 15 Rf.	100	880	3.1
195/65 R 16	92	695	2.7
215/65 R 16	98	825	2.7
215/65 R 16 XL	102	935	3.1
235/65 R 16	103	965	2.7
255/65 R 16	109	1135	2.7
215/65 R 17	98	825	2.7
	99	855	2.7
225/65 R 17	102	935	2.7
225/65 R 17 XL	106	1045	3.1
235/65 R 17	103	965	2.7
	104	990	2.7
235/65 R 17 XL	108	1100	3.1
245/65 R 17	107	1070	2.7
245/65 R 17 XL	111	1200	3.1
255/65 R 17	110	1165	2.7
255/65 R 17 XL	114	1300	3.1
265/65 R 17	112	1230	2.7
265/65 R 17 XL	116	1375	3.1

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
65 series			
275/65 R 17	115	1335	2.7
285/65 R 17	116	1375	2.7
235/65 R 18	106	1045	2.7
235/65 R 18 XL	110	1165	3.1
255/65 R 18	111	1200	2.7
265/65 R 18	114	1300	2.7
275/65 R 18	116	1375	2.7
235/65 R 19 XL	109	1135	3.1
60 series			
165/60 R 13	73	400	2.7
175/60 R 13	77	455	2.7
185/60 R 13	80	495	2.7
165/60 R 14	75	425	2.7
165/60 R 14 XL	79	480	3.1
175/60 R 14	79	480	2.7
185/60 R 14	82	525	2.7
195/60 R 14	86	585	2.7
155/60 R 15	74	410	2.7
165/60 R 15	77	455	2.7
175/60 R 15	81	510	2.7
185/60 R 15	84	550	2.7
185/60 R 15 XL	88	615	3.1
195/60 R 15	88	615	2.7
195/60 R 15 XL	92	695	3.1
205/60 R 15	91	675	2.7
205/60 R 15 XL / Rf.	95	760	3.1
215/60 R 15	95	760	2.7
215/60 R 15 XL	98	825	3.1
225/60 R 15	96	780	2.7
235/60 R 15	98	825	2.7
255/60 R 15	102	935	2.7
275/60 R 15	107	1070	2.7
185/60 R 16	86	585	2.7
195/60 R 16	89	640	2.7
195/60 R 16 XL	93	715	3.1
205/60 R 16	92	695	2.7
205/60 R 16 XL	96	780	3.1
215/60 R 16	95	760	2.7
215/60 R 16 XL / Rf.	99	855	3.1
225/60 R 16	98	825	2.7
225/60 R 16 XL / Rf.	102	935	3.1
235/60 R 16	100	880	2.7
235/60 R 16 XL / Rf.	104	990	3.1

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
60 series			
215/60 R 17	96	780	2.7
225/60 R 17	99	855	2.7
225/60 R 17 XL	103	965	3.1
235/60 R 17	102	935	2.7
235/60 R 17 XL	106	1045	3.1
255/60 R 17	106	1045	2.7
275/60 R 17	110	1165	2.7
P 225/60 R 18	99	855	2.7
225/60 R 18	100	880	2.7
225/60 R 18 XL	104	990	3.1
235/60 R 18	103	965	2.7
235/60 R 18 XL	107	1070	3.1
P 245/60 R 18	104	990	2.7
245/60 R 18	105	1020	2.7
255/60 R 18	108	1100	2.7
255/60 R 18 XL	112	1230	3.1
265/60 R 18	110	1165	2.7
265/60 R 18 XL	114	1300	3.1
275/60 R 18	113	1265	2.7
285/60 R 18	116	1375	2.7
255/60 R 19	109	1135	2.7
235/60 R 20 XL	108	1100	3.1
275/60 R 20 XL	119	1495	3.1
55 series			
195/55 R 13	80	495	2.7
185/55 R 14	80	495	2.7
175/55 R 15	77	455	2.7
185/55 R 15	82	525	2.7
185/55 R 15 XL / Rf.	86	585	3.1
195/55 R 15	85	565	2.7
195/55 R 15 XL / Rf.	89	640	3.1
205/55 R 15	88	615	2.7
225/55 R 15	92	695	2.7
185/55 R 16	83	535	2.7
185/55 R 16 XL	87	600	3.1
195/55 R 16	87	600	2.7
195/55 R 16 XL	91	675	3.1
205/55 R 16	91	675	2.7
205/55 R 16 XL	94	735	3.1
215/55 R 16	93	715	2.7
215/55 R 16 Rf.	95	760	3.1
215/55 R 16 XL	97	805	3.1
225/55 R 16	95	760	2.7
225/55 R 16 XL	99	855	3.1

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
55 series			
255/55 R 16	103	965	2.7
195/55 R 17	88	615	2.7
205/55 R 17	91	675	2.7
205/55 R 17 XL	95	760	3.1
215/55 R 17	94	735	2.7
215/55 R 17 XL	98	825	3.1
225/55 R 17	97	805	2.7
225/55 R 17 XL / Rf.	101	910	3.1
235/55 R 17	99	855	2.7
235/55 R 17 XL / Rf.	103	965	3.1
245/55 R 17	102	935	2.7
255/55 R 17	104	990	2.7
275/55 R 17	109	1135	2.7
215/55 R 18	95	760	2.7
215/55 R 18 XL	99	855	3.1
225/55 R 18	98	825	2.7
225/55 R 18 XL	102	935	3.1
235/55 R 18	100	880	2.7
235/55 R 18 XL	104	990	3.1
255/55 R 18	105	1020	2.7
255/55 R 18 XL	109	1135	3.1
225/55 R 19 XL	103	965	3.1
235/55 R 19	101	910	2.7
235/55 R 19 XL	105	1020	3.1
245/55 R 19	103	965	2.7
255/55 R 19 XL	111	1200	3.1
275/55 R 19	111	1200	2.7
195/55 R 20 XL	95	760	3.1
235/55 R 20	102	935	2.7
235/55 R 20 XL	105	1020	3.1
255/55 R 20 XL	110	1165	3.1
275/55 R 20 XL	117	1415	3.1
50 series			
175/50 R 13	72	390	2.7
185/50 R 14	77	455	2.7
165/50 R 15	72	390	2.7
195/50 R 15	82	525	2.7
205/50 R 15	86	585	2.7
185/50 R 16	81	510	2.7
195/50 R 16	84	550	2.7
195/50 R 16 XL	88	615	3.1
205/50 R 16	87	600	2.7
225/50 R 16	92	695	2.7
	93	715	2.7

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
50 series			
205/50 R 17	89	640	2.7
205/50 R 17 XL	93	715	3.1
215/50 R 17	91	675	2.7
215/50 R 17 XL	95	760	3.1
225/50 R 17	94	735	2.7
225/50 R 17 XL	98	825	3.1
235/50 R 17	96	780	2.7
235/50 R 17 XL	100	880	3.1
245/50 R 17	99	855	2.7
215/50 R 18	92	695	2.7
225/50 R 18	95	760	2.7
225/50 R 18 XL	99	855	3.1
235/50 R 18	97	805	2.7
235/50 R 18 XL	101	910	3.1
245/50 R 18	100	880	2.7
245/50 R 18 XL	104	990	3.1
285/50 R 18	109	1135	2.7
235/50 R 19	99	855	2.7
235/50 R 19 XL	103	965	3.1
255/50 R 19	103	965	2.7
255/50 R 19 XL	107	1070	3.1
265/50 R 19	106	1045	2.7
265/50 R 19 XL	110	1165	3.1
275/50 R 19 XL	112	1230	3.1
245/50 R 20	102	935	2.7
255/50 R 20 XL	109	1135	3.1
265/50 R 20 XL	111	1200	3.1
275/50 R 20	109	1135	2.7
285/50 R 20	112	1230	2.7
285/50 R 20 XL	116	1375	3.1
295/50 R 20 XL	118	1450	3.1
305/50 R 20 XL	120	1540	3.1
45 series			
195/45 R 13	75	425	2.7
195/45 R 14	77	455	2.7
195/45 R 15	78	470	2.7
195/45 R 16	80	495	2.7
195/45 R 16 XL	84	550	3.1
205/45 R 16	83	535	2.7
205/45 R 16 XL	87	600	3.1
215/45 R 16	86	585	2.7
215/45 R 16 XL	90	660	3.1
225/45 R 16	89	640	2.7
245/45 R 16	94	735	2.7

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
45 series			
195/45 R 17	81	510	2.7
205/45 R 17	84	550	2.7
205/45 R 17 XL	88	615	3.1
215/45 R 17	87	600	2.7
215/45 R 17 XL	91	675	3.1
225/45 R 17	91	675	2.7
225/45 R 17 XL / Rf.	94	735	3.1
235/45 R 17	94	735	2.7
235/45 R 17 XL	97	805	3.1
245/45 R 17	95	760	2.7
245/45 R 17 XL / Rf.	99	855	3.1
255/45 R 17	98	825	2.7
255/45 R 17 XL	102	935	3.1
215/45 R 18 XL	93	715	3.1
225/45 R 18	91	675	2.7
225/45 R 18 XL	95	760	3.1
235/45 R 18	94	735	2.7
235/45 R 18 XL	98	825	3.1
245/45 R 18	96	780	2.7
245/45 R 18 XL	100	880	3.1
255/45 R 18	99	855	2.7
255/45 R 18 XL	103	965	3.1
265/45 R 18	101	910	2.7
275/45 R 18	103	965	2.7
225/45 R 19	92	695	2.7
225/45 R 19 XL	96	780	3.1
235/45 R 19	95	760	2.7
235/45 R 19 XL	99	855	3.1
245/45 R 19	98	825	2.7
245/45 R 19 XL	102	935	3.1
255/45 R 19	100	880	2.7
255/45 R 19 XL	104	990	3.1
265/45 R 19 XL	105	1020	3.1
275/45 R 19 XL	108	1100	3.1
285/45 R 19	107	1070	2.7
285/45 R 19 XL	111	1200	3.1
295/45 R 19	109	1135	2.7
235/45 R 20 XL	100	880	3.1
245/45 R 20 XL	103	965	3.1
255/45 R 20	101	910	2.7
255/45 R 20 XL	105	1020	3.1
265/45 R 20	104	990	2.7
265/45 R 20 XL	108	1100	3.1
275/45 R 20 XL	110	1165	3.1

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
45 series			
285/45 R 20 XL	112	1230	3.1
295/45 R 20 XL	114	1300	3.1
265/45 R 21 XL	108	1100	3.1
275/45 R 21	107	1070	2.7
275/45 R 21 XL	110	1165	3.1
285/45 R 21	109	1135	2.7
285/45 R 22 XL	114	1300	3.1
305/45 R 22 XL	118	1450	3.1
40 series			
195/40 R 14	73	400	2.7
195/40 R 16 XL	80	495	3.1
215/40 R 16 XL	86	585	3.1
225/40 R 16	85	565	2.7
195/40 R 17 XL	81	510	3.1
205/40 R 17 XL	84	550	3.1
215/40 R 17	83	535	2.7
215/40 R 17 XL	87	600	3.1
235/40 R 17	90	660	2.7
245/40 R 17	91	675	2.7
255/40 R 17	94	735	2.7
255/40 R 17 XL	98	825	3.1
205/40 R 18 XL	86	585	3.1
215/40 R 18	85	565	2.7
215/40 R 18 XL	89	640	3.1
225/40 R 18	88	615	2.7
225/40 R 18 XL	92	695	3.1
235/40 R 18	91	675	2.7
235/40 R 18 XL	95	760	3.1
245/40 R 18	93	715	2.7
245/40 R 18 XL	97	805	3.1
255/40 R 18	95	760	2.7
255/40 R 18 XL	99	855	3.1
265/40 R 18 XL	101	910	3.1
275/40 R 18	99	855	2.7
275/40 R 18 XL	103	965	3.1
225/40 R 19	89	640	2.7
225/40 R 19 XL	93	715	3.1
235/40 R 19	92	695	2.7
235/40 R 19 XL	96	780	3.1
245/40 R 19	94	735	2.7
245/40 R 19 XL	98	825	3.1

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
40 series			
255/40 R 19	96	780	2.7
255/40 R 19 XL	100	880	3.1
265/40 R 19	98	825	2.7
265/40 R 19 XL	102	935	3.1
275/40 R 19	101	910	2.7
275/40 R 19 XL	105	1020	3.1
285/40 R 19	103	965	2.7
285/40 R 19 XL	107	1075	3.1
295/40 R 19 XL	108	1100	3.1
235/40 R 20 XL	96	780	3.1
245/40 R 20	95	760	2.7
245/40 R 20 XL	99	855	3.1
255/40 R 20	97	805	2.7
255/40 R 20 XL	101	910	3.1
265/40 R 20 XL	104	990	3.1
275/40 R 20 XL	106	1045	3.1
295/40 R 20	106	1045	2.7
295/40 R 20 XL	110	1165	3.1
255/40 R 21 XL	102	935	3.1
265/40 R 21	101	910	2.7
265/40 R 21 XL	105	1020	3.1
275/40 R 21 XL	107	1075	3.1
285/40 R 21 XL	109	1135	3.1
295/40 R 21 XL	111	1200	3.1
315/40 R 21	111	1200	2.7
325/40 R 21	113	1265	2.7
265/40 R 22 XL	106	1045	3.1
275/40 R 22 XL	108	1100	3.1
285/40 R 22	106	1045	2.7
285/40 R 22 XL	110	1165	3.1
305/40 R 22 XL	114	1300	3.1
305/40 R 23 XL	115	1335	3.1
285/40 R 24 XL	112	1230	3.1
305/40 R 24 XL	117	1415	3.1
35 series			
215/35 ZR 17 XL	83	535	3.1
245/35 R 17	87	600	2.7
215/35 R 18 XL	84	550	3.1
225/35 R 18 XL	87	600	3.1
245/35 R 18	88	615	2.7
245/35 R 18 XL	92	695	3.1
255/35 R 18	90	660	2.7
255/35 R 18 XL	94	735	3.1

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents).

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
35 series			
265/35 R 18	93	715	2.7
265/35 R 18 XL	97	805	3.1
275/35 R 18	95	760	2.7
275/35 R 18 XL	99	855	3.1
285/35 R 18	97	805	2.7
285/35 R 18 XL	101	910	3.1
215/35 R 19 XL	85	565	3.1
225/35 R 19 XL	88	615	3.1
235/35 R 19	87	600	2.7
235/35 R 19 XL	91	675	3.1
245/35 R 19 XL	93	715	3.1
255/35 R 19	92	695	2.7
255/35 R 19 XL	96	780	3.1
265/35 R 19	94	735	2.7
265/35 R 19 XL	98	825	3.1
275/35 R 19 XL	100	880	3.1
285/35 R 19	99	855	2.7
285/35 R 19 XL	103	965	3.1
295/35 R 19	100	880	2.7
295/35 R 19 XL	104	990	3.1
225/35 R 20 XL	90	660	3.1
235/35 R 20	88	615	2.7
235/35 R 20 XL	92	695	3.1
245/35 R 20	91	675	2.7
245/35 R 20 XL	95	760	3.1
255/35 R 20 XL	97	805	3.1
265/35 R 20	95	760	2.7
265/35 R 20 XL	99	855	3.1
275/35 R 20 XL	102	935	3.1
285/35 R 20 XL	104	990	3.1
295/35 R 20	101	910	2.7
315/35 R 20 XL	110	1165	3.1
245/35 R 21 XL	96	780	3.1
255/35 R 21 XL	98	825	3.1
265/35 R 21 XL	101	910	3.1
275/35 R 21 XL	103	965	3.1
295/35 R 21	103	965	2.7
295/35 R 21 XL	107	1070	3.1
275/35 R 22 XL	104	990	3.1
285/35 R 22 XL	106	1045	3.1
295/35 R 22 XL	108	1100	3.1
305/35 R 24 XL	112	1230	3.1
315/35 R 24 XL	114	1300	3.1

Tyre size	LI	Max. Load capacity kg	Inflation pressure (bar)
Passenger Car Tyres			
30 series			
255/30 R 18 XL	90	660	3.1
285/30 R 18	93	715	2.7
295/30 R 18	94	735	2.7
295/30 R 18 XL	98	825	3.1
255/30 R 19 XL	91	675	3.1
265/30 R 19 XL	93	715	3.1
275/30 R 19 XL	96	780	3.1
285/30 R 19 XL	98	825	3.1
295/30 R 19	96	780	2.7
295/30 R 19 XL	100	880	3.1
305/30 R 19 XL	102	935	3.1
325/30 R 19 XL	105	1020	3.1
235/30 R 20 XL	88	615	3.1
245/30 R 20 XL	90	660	3.1
255/30 R 20 XL	92	695	3.1
265/30 R 20 XL	94	735	3.1
275/30 R 20 XL	97	805	3.1
285/30 R 20 XL	99	855	3.1
295/30 R 20 XL	101	910	3.1
305/30 R 20 XL	103	965	3.1
335/30 R 20 XL	108	1100	3.1
255/30 R 21 XL	93	715	3.1
265/30 R 21 XL	96	780	3.1
275/30 R 21 XL	98	825	3.1
285/30 R 21 XL	100	880	3.1
295/30 R 21 XL	102	935	3.1
315/30 R 21 XL	105	1020	3.1
325/30 R 21 XL	108	1100	3.1
265/30 R 22 XL	97	805	3.1
295/30 R 22 XL	103	965	3.1
315/30 R 22 XL	107	1070	3.1
305/30 R 23 XL	105	1020	3.1
25 series			
315/25 R 19 XL	98	825	3.1
295/25 R 20 XL	95	760	3.1
305/25 R 20 XL	97	805	3.1
325/25 R 20 XL	101	910	3.1
295/25 R 21 XL	96	780	3.1
325/25 R 21 XL	102	935	3.1
305/25 R 22 XL	99	855	3.1
335/25 R 22 XL	105	1020	3.1
315/25 R 23 XL	102	935	3.1

Increased load capacity of tyres on caravans and lightweight trailers (only applies to trailers with a max. speed of 100 km/h or 62 mph entered in the car registration documents)).

Tyre size	PR	LI	Max ^{*)} Load capacity kg	Inflation pres- sure (bar)
Commercial-C-tyres^{*)}				
13 inch				
165 R 13 C	6	91	645	3.75
165/70 R 13 C	6	88	590	3.75
14 inch				
175 R 14 C	8	99	815	4.5
185 R 14 C	6	99	815	3.75
	8	102	895	4.5
195 R 14 C	8	106	1000	4.5
	10	110	1115	5.25
205 R 14 C	8	109	1080	4.5
215 R 14 C	8	112	1175	4.5
165/75 R 14 C	8	97	765	4.75
185/75 R 14 C	8	102	895	4.75
195/75 R 14 C	8	106	1000	4.75
165/70 R 14 C	6	89	610	3.75
175/70 R 14 C	6	95	725	3.75
195/70 R 14 C	8	101	865	4.75
175/65 R 14 C	6	90	630	3.75
15 inch				
185 R 15 C	8	103	920	4.5
195 R 15 C	8	106	1000	4.5
215/80 R 15 C	8	111	1145	4.75
245/75 R 15 C	6	109	1080	3.75
175/70 R 15 C	8	97	765	4.5
195/70 R 15 C	6	100	840	3.75
	8	104	945	4.5
205/70 R 15 C	8	106	1000	4.5
215/70 R 15 C	6	106	1000	3.75
	8	109	1080	4.5
225/70 R 15 C	6	109	1080	3.75
	8	112	1175	4.5
205/65 R 15 C	6	102	895	3.75
215/65 R 15 C	6	104	945	3.75
185/60 R 15 C	6	94	705	3.75
185/55 R 15 C	6	90	630	3.75

^{*)} 14, 15 and small 16 to 18 inch C tyres with treads like pass. car tyres for service on delivery vans.
For other C tyres, see Technical Databook for truck tyres.

^{**) also for C tyres: Load capacity per tyre (single fitment).}

Tyre size	PR	LI	Max. ^{**)} Load capacity kg	Inflation pres- sure (bar)
Commercial-C-tyres^{*)}				
16 inch				
235/85 R 16 C	8	114	1240	4.75
	10	120	1470	5.75
205 R 16 C	8	110	1115	4.5
175/75 R 16 C	8	101	865	4.75
185/75 R 16 C	8	104	945	4.75
195/75 R 16 C	8	107	1025	4.75
	10	110	1115	5.25
205/75 R 16 C	8	110	1115	4.75
	10	113	1210	5.25
215/75 R 16 C	8	113	1210	4.75
	10	116	1315	5.25
225/75 R 16 C	8	116	1315	4.75
	10	121	1525	5.75
215/70 R 16 C	6	108	1050	3.75
195/65 R 16 C	6	100	840	3.75
	8	104	945	4.75
205/65 R 16 C	6	103	920	3.75
	8	107	1025	4.75
215/65 R 16 C	4	102	895	3.75
	6	106	1000	3.75
	8	109	1080	4.75
225/65 R 16 C	8	112	1175	4.75
	8	115	1275	4.75
235/65 R 16 C	10	118	1385	5.25
		121	1520	5.75
285/65 R 16 C	10	128	1890	5.25
195/60 R 16 C	6	99	815	3.75
205/60 R 16 C	6	100	840	3.75
215/60 R 16 C	6	103	920	3.75
225/60 R 16 C	6	101	865	3.25
	(6)	105	970	3.75
	8	111	1145	4.75
17 inch				
185/60 R 17 C	6	96	745	3.75
215/60 R 17 C	6	104	945	3.75
	8	109	1080	4.75
235/60 R 17 C	10	117	1350	5.25
225/55 R 17 C	6	104	945	3.75
	8	109	1080	4.75
255/55 R 17 C	10	118	1390	5.25
18 inch				
255/55 R 18 C	8	116	1315	4.75

Inner tube group	Tyre sizes (radial tyres)	
1020	145; 165/70	R 10 R 10
1210	125; 145/70	R 12 R 12
1220	135-150 155/70	R 12 R 12
1230	155; 165 165/70; 175/70	R 12 R 12
1320	135-150 145/70; 155/70	R 13 R 13
1330	155-165 165/70;175/70	R 13 R 13
1340	175-185 185/70; 195/70	R 13 R 13

Valve for all tubes indicated: 38 G 11.5.
Tubes may not be fitted in tyres of 65 series and below.

Inner tube group	Tyre sizes (radial tyres)	
1420	135-150 155/70	R 14 R 14
1430	155-165 165/70; 175/70	R 14 R 14
1440	170-185 185/70; 195/70	R 14 R 14
1460	195-205 205/70; 215/70	R 14 R 14
1510	125	R 15
1520	135-150 155/70	R 15 R 15
1530	155-165 165/70; 175/70	R 15 R 15
1540	170-185 185/70; 195/70	R 15 R 15
1550	6.70-7.60	R 15
1560	195; 205 205/70; 215/70; 225/70	R 15 R 15

The rim is the part of the wheel which supports the tyre.

1. Important elements of the rim

Rim flange = lateral support for the tyre bead

Flange distance = clear rim width

Bead seat = base on which the tyre bead is seated

Well = inner side of the rim

Diameter = specified diameter flange / bead seat

Hump = continuous raised section of the rim bead seat which enables a better fitting of tubeless tyre beads at **low pressure**^{*)}.

2. Types of rims

The well-base rim is virtually the only type of rim used on cars, caravans and other car trailers:

Well-base rims = one-piece rims, deepened well for easier tyre fitting, 5° tapered bead seat, “x” in the wheel size designation.

Virtually only J and B versions of the well-base rim are used and these are explained here in more detail.

If rubber valves (snap-in type) are used on rims for higher speeds, these must be fitted with **valve supports** where necessary. Also refer to the section “Fitting the tyre”.

3. Wheel disc (nave)

The wheel disc is the linking element between the rim and the axle hub. Of all the measurements for wheel linking elements – centre bore and bore diameter, bolt hole type and **offset depth** – the latter is a particularly important factor for the free movement of the tyre in any wheel position.

(Offset depth = 0, when the rim centre and hub contact area of the wheel disc are in line).

4. Wheel strength

The wheel manufacturer must confirm that the wheel strength is adequate for each particular application.

5. Lateral and true running of the wheels (without tyres)

On cars which are virtually all able to considerably exceed 100 km/h (62 mph), it is particularly important that the wheels of the vehicle are **well-centred**.


There should be as little radial and lateral run-out as possible on both bead seat / flange sides of the rim, in order to achieve **good smooth running**.

The standard shows max. tolerances of 1.20 mm. This dimension is for the centre of the tyre seat area or the centre of the flange height. All measurements, particularly the **uniformity**, should be well within these tolerances.

^{*)}Safety shoulders (e. g. hump) are prescribed for tubeless radial car tyres. They should also be used for tubeless light truck C tyres with a 14 to 18 inch code for the rim diameter.

R₄ and R₅: between 4 and 10 mm
 R₅: not larger than 10 mm

Valve Hole-Ø:
 11.5 mm (11.3₋₀^{+0.4}) centrally in the side of the rim well.
 16.0 mm (15.7 mm₋₀^{+0.4}) only with Ø-Code 15.

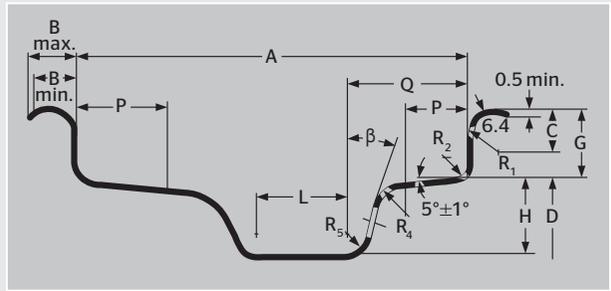

Rim Contour	Dimensions (mm)										
	A	B		G	P	H	L	Q	R ₁	R ₂	β
		Min.	Max. ¹⁾	± 0,6	Min.	Min. ²⁾	Min.	Max.	Min.	Max.	Min.
3.00 B	76				13		16	28			10°
3.50 B	89				15		19	34			
4.00 B	101.5										
4.50 B	114.5	10	13	14.1		15			7.5	4.5	13°
5.00 B	127				19.5		22	45			
5.50 B	139.5										
6.00 B	152.5										
3 J	76				13		16	28			10°
3 ½ J	89				15		19	34			
4 J	101.5										
4 ½ J	114.5										
5 J	127										
5 ½ J	139.5										
6 J	152.5										
6 ½ J	165										
7 J	178										
7 ½ J	190.5										
8 J	203	11	15	17.3		17.3			9.5	6.5	20°
8 ½ J	216				19.5		22	45			
9 J	228.5										
9 ½ J	241.5										
10 J	254										
10 ½ J	266.5										
11 J	279.5										
11 ½ J	292										
12 J	305										
12 ½ J	317.5										

¹⁾ B max. values may be exceeded on rims for light commercial vehicles



²⁾ Minimum dimensions for well depth (H) and well angle are required for tyre mounting

Rim diameter

Code (ins)	12	13	14	15	16	17	18	19	20	21	22	23	24
D (mm)	304.0	329.4	354.8	380.2	405.6	436.6	462.0	487.4	512.8	538.2	563.6	589.0	614.4

Special rim executions for passenger cars


In many countries safety rims must be used for tubeless radial tyres.

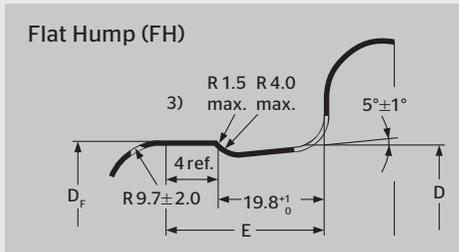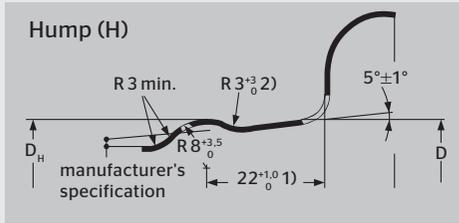

- ¹⁾ In most car rims 19.8 mm.
- ²⁾ For B-Rims R = 8.5 mm max. resp. R = 4 ± 1 mm.
- ³⁾ Deburred.

These **full-drop centre rims with safety shoulders** for cars, estate cars and light trucks are marked with the following-codes shown after rim size designation:

- H** = one-sided round hump on outer shoulder (formerly: H 1)
- H2** = double round hump
- FH** = flat hump on outer shoulder (formerly: FHA 1)
- FH2** = double flat hump (formerly: FHA 2)
- CH** = combination hump = flat hump on outer shoulder, round hump on inner shoulder (formerly: FHA-H)
- SL** = special ledge
- EH2/2+ =** Extended Hump (with extended hump on both sides)
(see following page)

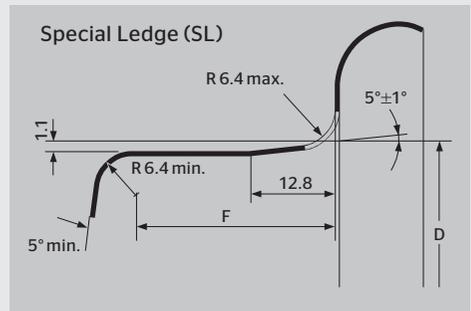

Ledge	Rim diameter Code (ins)	Dimensions (mm)		
		H	FH	
		Circumference $\pi \cdot D_H (+ 0/-3)$	Circumference $\pi \cdot D_F (+ 0/-3)$	E Max.
B	12	957.6	-	-
	13	1037.0	1034.8	24.5
	14	1116.8	1114.6	
J	13	1037.0	1034.8	28.5
	14	1116.8	1114.6	
	15	1196.6	1194.4	
	16	1276.4	1274.2	
	17	1373.8	1371.6	
	18	1453.6	1451.4	
	19	1533.4	1531.2	
	20	1613.2	1611.0	
	21	1693.0	1690.8	
	22	1772.8	1770.6	
	23	1852.6	1850.4	
	24	1932.4	1930.2	

**SAFETY WARNING!**

The following instructions must be observed to ensure vehicle safety at all times. Disregarding the fitting instructions could endanger

the safety of the tyre fitter or driver. This applies in particular to inflation pressure.

Non-compliance with these instructions means risking tyre damage which, if serious enough, may result in a tyre bursting. It is a hazard like this that can cause traffic accidents involving vehicle damage and / or serious personal injury.

Correct choice of tyre and wheel

Tyres should only be chosen in accordance with vehicle documents and recommendations of the tyre manufacturer.

The dimensions and service descriptions of SSR runflat tyres* (see page 23) correspond to those of standard tyres of the same size and construction. SSR tyres may only be fitted on vehicles for which they are approved by the vehicle manufacturer and that are equipped with a tyre pressure monitoring system (TPMS).

Do not mix SSR runflat tyres with standard tyres.

If tyres are changed to a different size, all legal requirements and regulations, as well as the recommendations of the vehicle, wheel and tyre manufacturers must be complied with. In any event, the freedom of motion of the wheel and adequate load capacity of the tyre must be observed.

Tyre sizes and rims not entered in the vehicle registration document may only be fitted if the vehicle and tyre manufacturer issue a **certificate of non-objection** or if a public authority issues fitting approval after an inspection by an officially authorised expert**).

80 and 82 series passenger car tyres of the same size can be interchanged without new approval and without any new entry in the vehicle documents if Load Index (LI) and Speed Symbol (SSY) of the interchanging size are of an equivalent or higher-grade quality. Example: 155/80 R 13 79 T replaces 155 R 13 79.

Mixed tyre constructions (radial or cross-ply) for cars, caravans and other car trailers are not permitted: Tyres fitted on any one vehicle must all be either radial or cross-ply. (Exception: Use of the spare tyre in an emergency).

The same applies to the choice of **wheels (rims)**: The standard wheels approved by the vehicle manufacturer must be used as recommended.

The **tyre widths** given in the tables on pages 26-65 and 76-87 refer to the **measuring rim** (bold print in the tables). In the event of a change in the rim width by + ½ inch, the tyre width changes by approx. + 5 mm.

Winter tyres

Winter tyres are clearly superior in the cold months of the year; they offer a wider margin of safety and better economy when the temperature drops below 7 °C.

Winter tyres approved for a max. speed lower than that of the vehicle may only be fitted if the max. speed of these tyres is displayed in full view of the driver, e. g. on a clearly visible sticker on the dashboard. This maximum tyre speed must not be exceeded.

*) only available for tyre brand Continental

**) Exception: This does not apply to the UK

A combination of summer and winter tyres on passenger cars is not recommended.

Winter tyres have to meet special requirements, meaning that the legal minimum tread depth of 1.6 mm is inadequate. **The suitability limit for winter use is a tread depth of 4 mm.** In the interest of safety, Continental recommends replacing winter tyres before the tread depth drops below 4 mm for winter service.

Top safety in winter can be provided only by true winter tyres on all axle positions (4 tyres).



Snowflake designation: This additional marking on an M+S tyre shows that the tyre meets prescribed test criteria and ensures good winter properties.

Brittleness temperature of rubber compounds – passenger tyres

Several performance aspects of tyres are influenced by temperature. For example traction (wet and dry), rolling resistance, mileage and ride comfort.

To achieve optimum performance, Continental therefore recommends that winter tyres be used at temperatures below +7 °C and summer tyres at temperatures above +7 °C.

All-season tyres with M+S marking, although a compromise in certain performance aspects, are suitable for use in hot and cold temperatures.

The tread patterns and rubber compounds used in the above mentioned tyres are specifically designed and developed to offer optimum performance within the temperature range for which they are intended.

Summer tyres – especially Ultra High Performance (UHP) tyres

The highly developed, specialized tread compounds used in such tyres are designed to provide the highest possible levels of grip at ambient temperatures above +7 °C.

Such tread compounds are however **very sensitive to temperature.**

Permanent damage may occur to the tread compounds of such tyres if they are used at temperatures below -20 °.

At this temperature, the tread compounds of UHP summer tyres may lose their elasticity and become brittle (the so-called brittleness point). When this occurs and the tyre is flexed, the tread compound may crack.

Therefore, UHP summer tyres should not be used at temperatures below -20 °C. Continental group tyres with an M+S marking on the sidewall are suitable for use down to -45 °C.



Fitting the tyre

SAFETY WARNING!

If a tyre is not properly fitted it may burst. The energy released in a blow-out can cause fatal injuries so tyres must be fitted by an expert.

Only approved fitting tools and lubricants may be used. Observe all fitting instructions.

Because of the special technology involved, SSR runflat tyres^{*)} may be mounted and removed only by specifically trained workshops that have been certified by Continental (see page 23).

Detailed mounting instructions for SSR runflat tyres^{*)} under www.conti-ssr.co.uk

ContiSeal tyres^{*)} do not differ from non-ContiSeal tyres in aspects such as mounting, demounting, inflating, and balancing. For detailed information [see page 24](#) and www.contiseal.com

Before the old tyre is taken off the valve insert must be unscrewed and removed to ensure all air has escaped.

When removing tyres sealed with sealant (e. g. ContiComfort-Kit^{*)}) pay special attention to the following:

The tyre could contain up to ½ litre liquid sealant. Therefore:

- › Wear PE gloves when removing the tyre and make sure that the work area is well ventilated (to prevent odour build-up).
- › Make certain that the tyre is fully deflated before removal.
- › Move the wheel carefully so the sealant can collect at the lowest point in the tyre. Drain all of the sealant before removing the tyre.
- › Dispose of remaining sealant in compliance with national regulations.

Detailed instructions for removing tyres filled with sealant can be found under www.conticomfortkit-shop.co.uk

The new tyre and rim must have matching diameters and be approved as a combination for the vehicle model concerned. Only rims of the correct size in perfect condition and free of rust should be used. They must not be damaged, out of shape or worn. This applies in particular in combination with SSR runflat tyres^{*)}.

When fitting new tube-type tyres, always use **new tubes**. As tubes stretch in service, there is a risk of folds forming in old tubes, so re-used tubes could suddenly tear.

For safety reasons, tubeless tyres should always be fitted with **new valves**.

If rubber valves (snap-in types) are used for tubeless tyres, the vehicle manufacturer's instructions must be complied with in all cases. A **valve support** (i. e. a stopper on the rim itself or the hubcap) should be fitted, if H, V, W, Y or ZR tyres are specified for the vehicle. This ensures that valves are not forced off at high speeds.

Always coat the tyre beads and the rim with a **fitting lubricant** recommended by the tyre manufacturer. This applies in particular to low section tyres and SSR runflat tyres^{*)}. Never use greases or other hydrocarbons for this purpose.

While the tyre is being inflated, the wheel must remain firmly secured on the mounting machine. **Never inflate an unsecured tyre.**

^{*)} only available for tyre brand Continental

Keep a reasonable distance from any tyre that is being inflated. Make use of a sufficiently long and secured extension hose with an integrated pressure gauge. **Never bend over a tyre while it is being inflated.**

When fitting tubeless car tyres, care should be taken to ensure that the tyre beads coming from the well-base first clear the hump in the rim shoulder. To avoid cracks in the bead core, the “**pop**” pressure necessary should not exceed 3.3 bar. If the tyre does not pop into place even at this pressure, the pressure must be lowered, and the cause identified and eliminated. Then the procedure can be repeated.

Only when the tyre beads are seated correctly on the rim shoulder may the pressure be increased to achieve the required press-fit and firm grip on the rim flanges. However, this “**fitting pressure**” should not exceed 150% of the max. pressure given in the tables or be more than 4.0 bar. After this, adjust the pressure to the **operating pressure** specified by the vehicle manufacturer (also see Continental tyre pressure table).

Car tyres should be **dynamically balanced**.

Fitting the wheel to the vehicle

If the tyres exhibit uneven wear then the axle geometry should be checked and corrected if necessary.

SSR runflat tyres^{*)} may only be fitted on vehicles for which they are approved by the vehicle manufacturer and that are equipped with a tyre pressure monitoring system.

Valves should be fitted with **valve caps** – preferably with a sealing ring – as they protect the delicate **valve inserts** and the inside of the tyre.

When mounting **wheel caps and wheel trim rings**, sufficient clearance to the tyre sidewall must be maintained. The wheel cap or wheel trim ring may not come in contact with the tyre under any operating conditions. This applies in particular to tyres with rim protection (flange ribs “FR”).

Directional tyres must be fitted so that they roll in the direction of the arrow on the sidewall as the vehicle moves forward.

Exception: For a short-term use as a temporary fitment spare; but revert to specified fitted position at the earliest possible opportunity!

Asymmetrical tyres must be fitted with the sidewall ‘Outside’ on the outside of the vehicle so that their asymmetrical treads can be used to best effect.

Tyre pressure

SAFETY WARNING!



Incorrect tyre pressure can lead to the inside of the tyre being damaged. This can result in tyre failure or even a blowout. Hidden tyre damages are not rectified by adjusting the tyre pressure.

^{*)} only available for tyre brand Continental

Table 1:

Load capacities and tyre pressures - standard load car tyres

(The tyre pressure values shown here apply to speeds up to 160 km/h (100 mph) and camber angles not greater than 2°)

Load Index	Load capacity (kg) at tyre pressure (bar)					
	2.0	2.1	2.2	2.3	2.4	2.5
62	220	230	240	250	255	265
63	230	235	245	255	265	272
64	235	245	255	260	270	280
65	245	250	260	270	280	290
66	250	260	270	280	290	300
67	255	265	275	285	295	307
68	265	275	285	295	305	315
69	270	285	295	305	315	325
70	280	290	300	315	325	335
71	290	300	310	325	335	345
72	295	310	320	330	345	355
73	305	315	330	340	355	365
74	315	325	340	350	365	375
75	325	335	350	360	375	387
76	335	350	360	375	385	400
77	345	360	370	385	400	412
78	355	370	385	400	410	425
79	365	380	395	410	425	437
80	375	390	405	420	435	450
81	385	400	415	430	445	462
82	395	415	430	445	460	475
83	405	425	440	455	470	487
84	420	435	450	470	485	500
85	430	450	465	480	500	515
86	445	460	480	495	515	530
87	455	475	490	510	525	545
88	470	485	505	525	540	560
89	485	505	525	545	560	580

Load capacities and tyre pressures - standard load car tyres

Load Index	Load capacity (kg) at tyre pressure (bar)					
	2.0	2.1	2.2	2.3	2.4	2.5
90	500	520	540	560	580	600
91	515	535	555	575	595	615
92	525	550	570	590	610	630
93	545	565	585	610	630	650
94	560	585	605	625	650	670
95	575	600	625	645	670	690
96	595	620	640	665	685	710
97	610	635	660	685	705	730
98	625	650	675	700	725	750
99	650	675	700	725	750	775
100	670	695	720	750	775	800
101	690	720	745	770	800	825
102	710	740	765	795	825	850
103	730	760	790	820	845	875
104	755	785	815	840	870	900
105	775	805	835	865	895	925
106	795	825	860	890	920	950
107	815	850	880	910	945	975
108	835	870	905	935	970	1000
109	860	895	930	965	995	1030
110	885	920	955	990	1025	1060
111	910	950	985	1020	1055	1090
112	935	975	1010	1050	1085	1120
113	960	1000	1040	1075	1115	1150
114	985	1025	1065	1105	1140	1180
115	1015	1055	1095	1135	1175	1215
116	1045	1085	1130	1170	1210	1250

Table 2:

Load capacities and tyre pressures - Reinforced and Extra Load (XL) car tyres

Load Index	Load capacity (kg) at tyre pressure (bar)									
	2.0	2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9
79	325	340	350	365	375	390	400	415	425	437
80	335	350	360	375	385	400	410	425	440	450
81	345	355	370	385	395	410	425	435	450	462
82	355	365	380	395	410	420	435	450	460	475
83	360	375	390	405	420	430	445	460	475	487
84	370	385	400	415	430	445	460	470	485	500
85	385	400	415	430	445	455	470	485	500	515
86	395	410	425	440	455	470	485	500	515	530
87	405	420	435	455	470	485	500	515	530	545
88	415	435	450	465	480	495	515	530	545	560
89	430	450	465	480	500	515	530	550	565	580
90	445	465	480	500	515	535	550	565	585	600
91	455	475	495	510	530	545	565	580	600	615
92	470	485	505	525	540	560	575	595	615	630
93	485	500	520	540	560	575	595	615	630	650
94	500	520	535	555	575	595	615	635	650	670
95	515	535	555	575	595	615	630	650	670	690
96	525	550	570	590	610	630	650	670	690	710
97	540	565	585	605	625	650	670	690	710	730
98	555	580	600	625	645	665	685	710	730	750
99	575	600	620	645	665	690	710	730	755	775
100	595	620	640	665	690	710	735	755	780	800
101	615	635	660	685	710	735	755	780	800	825
102	630	655	680	705	730	755	780	805	825	850
103	650	675	700	725	750	775	800	825	850	875
104	670	695	720	750	775	800	825	850	875	900
105	685	715	740	770	795	820	850	875	900	925
106	705	735	760	790	815	845	870	895	925	950
107	725	755	780	810	840	865	895	920	950	975
108	745	770	800	830	860	890	915	945	970	1000
109	765	795	825	855	885	915	945	975	1000	1030
110	785	820	850	880	910	940	970	1000	1030	1060
111	810	840	875	905	935	970	1000	1030	1060	1090
112	830	865	900	930	965	995	1025	1060	1090	1120
113	855	890	920	955	990	1020	1055	1085	1120	1150
114	875	910	945	980	1015	1050	1080	1115	1145	1180
115	905	940	975	1010	1045	1080	1115	1145	1180	1215
116	930	965	1000	1040	1075	1110	1145	1180	1215	1250
117	955	995	1030	1065	1105	1140	1180	1215	1250	1285
118	980	1020	1060	1095	1135	1170	1210	1245	1285	1320
119	1010	1050	1090	1130	1170	1210	1245	1285	1320	1360
120	1040	1080	1120	1165	1205	1245	1285	1320	1360	1400

The tyre must be inflated to the pressure specified by the vehicle and tyre manufacturer. This varies depending on the load and service conditions.

The pressure always refers to the **cold** tyre and must not be allowed to fall below this value.

The pressure inside warm tyres - driving causes heat build-up - is naturally higher. So never reduce the pressure of warm tyres. Once they cool down, their pressure could fall below the specified **minimum tyre pressure**.

The tyre pressure must be checked and adjusted regularly every 14 days on the cold tyre. The spare tyre may not be forgotten.

Incorrect tyre pressure causes premature and / or uneven tread wear. **Under-inflated** tyres have a higher **rolling resistance**, and this means a higher **fuel consumption**.

In extreme cases underinflation may result in tyre failure.

The tyre pressure values for car tyres given in table 1 and 2 are **minimum pressures** for speeds up to 160 km/h (100 mph). They may be increased, for example, for reasons of driving stability. Please refer to the recommendation of the vehicle manufacturer.

3.2 bar is the **maximum tyre pressure** on standard version car tyres up to and including Speed Symbol T; 3.5 bar for H-, V-, W-, Y and ZR-, as well as M+S and XL / Reinforced tyres. **These values may not be exceeded.**

ZR tyres without service description have from 160 km/h (100 mph) to 190 km/h (118 mph) inclusive the stated pressure of 2.5 bar. Then the inflation pressure must be increased by 0.1 bar for each 10 km/h (6 mph) up to 3.5 bar at 240 km/h (150 mph) under full load and maximum 2° wheel camber.

Table 3:

For **higher speeds** the **tyre pressure** should be **increased** in regard of the load capacity (taken from the ETRTO Standards Manual):

Speed capacity of the vehicle (incl. tolerance, about 9 km/h, 6 mph) (km)	Speed Symbols									
	Q	R	S	T	U	H	V	W	Y	
	Tyre pressure ^{*)} (bar)									
≤160	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
170		2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.5	2.5
180			2.6	2.6	2.6	2.6	2.6	2.6	2.5	2.5
190				2.7	2.7	2.7	2.7	2.7	2.5	2.5
200					2.7	2.7	2.7	2.7	2.6	2.5
210							2.8	2.8	2.7	2.5
220								2.8	2.8	2.5
230								2.8	2.9	2.6
240								2.8	3.0	2.7
250									3.0	2.8
260									3.0	2.9
270									3.0	3.0
280										3.0
290										3.0
300										3.0

^{*)} at the maximum load of the tyre, up to 2° wheel camber

Load capacity and speed

When determining the minimum tyre size necessary for a vehicle, the permitted **axle load** and the **maximum design speed** of the vehicle must be used as a basis.

The maximum load capacity of a car tyre is expressed through its **Load Index (LI)** (see page 8).

Table 4:
Percentage of load capacity versus speed¹⁾
 (taken from the ETRTO Standards Manual):

Speed capacity of the vehicle (incl. tolerance, about 1 % V_{max} + 6.5 km/h) (km)	Speed Symbols				
	H	V	W	Y	(Y)
	%				
210	100	100	100	100	100
220	-	97	100	100	100
230	-	94	100	100	100
240	-	91	100	100	100
250	-	-	95	100	100
260	-	-	90	100	100
270	-	-	85	100	100
280	-	-	-	95	³⁾
290	-	-	-	90	³⁾
300	-	-	-	85	³⁾
>300 ²⁾	-	-	-	-	³⁾

¹⁾ For intermediate maximum speeds, linear interpolation of the tyre load capacity is permitted.

²⁾ For speeds over 300 km/h (187 mph), the relevant inflation pressures will be agreed between vehicle and tyre manufacturers (or their national associations), taking into consideration the vehicle characteristics and the type of service.

³⁾ (Y) tyres fulfill the requirements of Y tyres and could even be higher depending on the maximum speed. The load capacity of (Y) tyres has to be confirmed by the tyre manufacturer.

For **ZR tyres** without service description the maximum load capacity given in the tables from [page 26](#) onwards applies to speeds up to 240 km/h (150 mph).

If car tyres are to be used on a vehicle with a **wheel camber** of over 2°, please check load capacity and tyre pressure with us.

For speeds over 240 km/h (150 mph) please refer to us for load capacity and tyre pressure.

The load capacity of tyres in **twin fitment** is 1.85 times the load capacity of a single tyre.

The **load capacities** in the tables for car tyres can be increased if the tyres are fitted on vehicles with **the following low type-related** max. speeds and if the inflation pressure is increased at the same time (taken from the ETRTO Standards Manual):

Max. speed capability	(km/h)	60	50	40	30	25
Load capacity	(%)	110	115	125	135	142
Inflation pressure increase	(bar)	0.1	0.2	0.3	0.4	0.5

Tyre damage

Most tyre damage is caused by incorrect tyre pressure, so we recommend a regular tyre pressure check every 2 weeks. When the car has been driven and the tyres are warm, it is normal for the **tyre pressure to increase**. Never bleed warm tyres.

A balanced, even **style of driving** is beneficial for the tyres and the environment. Harsh acceleration, braking and fast cornering shorten the **service life** of tyres.

This applies equally to other types of **tyre usage** such as severe scuffing along the kerb, or driving over obstacles. This can cause hidden or visible **damage** to tyres.

Vibrations of the steering wheel could point to tyre damage. All the vehicle's tyres should be checked immediately for damage.

Overstressing of tyres (excessive speed or overloading), is to be avoided. This has the same critical effect as **under inflation** and can cause heat damage to the tyre.

Tyre rotation on a vehicle

The tyres on a vehicle should be rotated regularly to help ensure even wear and maximum tread life.

Tyres should be rotated as instructed in the vehicle owner's manual, with special attention being given to the **recommended interval for rotating tyres**. Unless otherwise specified by the vehicle manufacturer, tyres should be rotated every 10,000 to 12,000 kilometers - or even earlier if the tread shows signs of uneven wear. In the latter case, the vehicle's wheel alignment and pertinent mechanical components should be checked and corrected, if need be.

Full-size **spare tyres** (not temporary spares) of the same size and design as the tyres in use on the vehicle should be included in the tyre rotation. In conjunction with the rotation, the full-size spare tyre's inflation pressure should be checked and, if need be, corrected.

A tyre's **inflation pressure** must correspond to what is specified in the vehicle owner's manual for the respective tyre position (recommended inflation pressure may differ for the front- and rear axle tyres).

Tyre rotation may effect the **tyre pressure monitoring system** (TPMS). The vehicle owner's manual or a qualified service professional should be consulted in the event that the TPMS has to be adjusted or recalibrated.

The **rolling direction** of directional tyres should not be reversed when the tyres are rotated.

Mixing tyres should be avoided

Tyre size, Load Index (LI) and Speed Symbol (SSY) at all wheel positions should be in accordance with the vehicle manufacturer's specification. In many countries, this is a legal requirement.

Driving with a non-recommended mix of tyre sizes, designs and Speed Symbols can be dangerous. In the event that tyres of different sizes, designs, Load Index or Speed Symbol are to be fitted on a vehicle, the vehicle manufacturer's recommendations should be heeded and /or the advice of a qualified tyre specialist sought. Some vehicles leave the factory with different tyre sizes on the front and rear axles. This configuration must not be changed unless approved by the vehicle manufacturer.

No more than one temporary spare^{*)} should be used on a vehicle at any one time. A tyre of this kind may only be driven up to a maximum speed of 80 km/h and is intended for temporary use, as indicated on the tyre sidewall and /or on a label attached to the tyre or the wheel.

Mounting new tyres on the rear axle

It is recommended that all tyres used on the vehicle be replaced at the same time. If this is not the case, at least all the tyres on the same axle should be replaced at the same time.

If only one axle set of tyres is replaced, it is recommended to fit the newest tyres on the rear axle.

Additional important tips regarding tyre position

The **spare tyre's** date of manufacture and condition (e. g. signs of cracking, remaining tread depth) should be checked regularly.

For 4-wheel drive and All Wheel drive vehicles, any special tyre fitment requirements in the vehicle owner's manual should be heeded - especially if the vehicle is equipped with electronic systems such as antilock brakes, traction control or stability control. Damage to the vehicle or its transmission can result if these requirements are not followed.

Winter tyres should be fitted to all wheel positions. They should not be mixed with all-season or summer tyres.

^{*)} only available for tyre brand Continental.
[See page 66 ff.](#)

Tyre Storage Recommendations

These recommendations are intended for consumers, but they are also important for tyre dealers. For commercial applications of new and waste tyres (tyre dealers and fleets), there may be more stringent and legal restrictions. Please check local regulations.

ContiSeal tyres^{*)} should be stored under the same conditions as recommended here for non-ContiSeal tyres.

Due to the sticky nature of the inside of ContiSeal tyres, do not place any objects or material inside the tyre as they may become stuck and subsequently difficult to remove without damage to the tyre.

Tyres are compounded to resist normal deterioration caused e. g. by sunlight, humidity and ozone. Nevertheless, stored tyres should be protected against these and other potentially damaging conditions.

The longer the storage period, the more exposure there is to potential damage.

After dismantling from a vehicle the tyres should be thoroughly cleaned and inspected for damage. Remove all stones and debris from the grooves. Chalk marking the tyres with their wheel positions (FL for Front Left, RR for Rear Right, etc.) will help to find the correct positions according to the rotational plan.

General:

- › DO STORE TYRES where it is clean, dry and moderately ventilated.
- › **Moist conditions** should be avoided. Tyres destined for retreading / repairing should be thoroughly cleaned and dried out before such operations are performed.
- › DO STORE TYRES at **temperatures** not exceeding 35 °C (95 F), preferable below 25 °C (77 F). Direct contact with hot pipes and radiators must be avoided.
- › Also deep temperatures below the freezing point might lead to brittleness and tyres should be carefully warmed up before mounting.
- › DO STORE TYRES, if outdoors, protected by an opaque waterproof covering, but avoid creating a heat box or steam bath. Ensure proper ventilation.
- › DO STORE TYRES, if outdoors, where tyres are raised off the storage surface.
- › **AVOID** STORING TYRES on piers, ship decks, or other unprotected areas.
- › **AVOID** STORING TYRES, where they can be damaged by passing objects – lawn mower, bicycle, or garden tools.
- › **AVOID** STORING TYRES where the area is wet, oily, and / or greasy such as with gasoline or petroleum-based products. Also, do not store on or against sensitive surfaces where staining can take place.

^{*)} only available for tyre brand Continental

Tyres with rims

Inflated




Do not stand them upright

hang them



or pile them (restack every four weeks)

Tyres without rims



Do not pile them, or hang them

stand them upright and rotate them every four weeks
(on racks clear of floor)

- › **AVOID STORING TYRES** in the proximity of chemical agents like solvents, fuels, oils, hydrocarbons, paint, acids, disinfectants, etc.
 - › **AVOID STORING TYRES** where subject to extreme temperatures, direct sunlight or artificial light with a high ultra-violet content. Room lighting with ordinary incandescent lamps is preferable to fluorescent tubes.

Never store them near battery chargers, ovens, or open fires.
 - › **AVOID STORING TYRES** on black asphalt or other heat absorbent surfaces and on highly reflective surfaces (i. e., sand or snow covered ground).
 - › **AVOID STORING TYRES** in the same area as an electric motor or other ozone generating source. If there is a question, check ozone levels to be sure they do not exceed 0.08 ppm.
 - › **Do not** use tyres as a workbench or tool stand. Soldering irons, power drill and tools can damage a tyre.

Never put a burning cigarette on a pile of tyres.
 - › **Do not** store other items on top of a tyre, especially where staining of the surface would be a concern.
- Loose tyres or tyres mounted on rims,**
but not installed on a vehicle:
- › DO STORE TYRES so that they retain their shape.
 - › Mounted tyres should preferably be inflated to only 100 kPa (15 psi / 1 bar).
 - › **Be sure to adjust the tyres to the recommended inflation pressure before mounting on the vehicle.**

Tyres installed on a vehicle in long term storage:

- › If possible, store the vehicle on blocks to remove all weight from the tyres and cover the tyres to protect them from environmental exposure.
- › If the vehicle cannot be raised, completely unload it to reduce the load on the tyres. The storage surface should be firm, reasonably level, well drained, and clean.
- › In cases where the tyres will be supporting the vehicle, it is permissible to inflate the tyres to the maximum pressure listed on the sidewall. Be sure to return the inflation pressure to recommended usage pressure before operating the vehicle.
- › In cases where the tyres will be supporting the vehicle, it is recommended that the vehicle be moved every month to reduce the risk of a 'flat spot'. If the tyres do develop "flat spots," these will usually disappear in a short period of service.

Tyre repair



SAFETY WARNING!

Serious injury or death may result from a tyre disablement that is caused by failing to observe the following safety and maintenance information.

During its service life, a tyre undergoes a variety of different usage conditions and can be damaged in many different ways. This damage can result from punctures, impacts, cuts, etc. Tyre damage can reduce a tyre's structural integrity by, for example:

- › Air loss resulting in underinflated service conditions which lead to internal structural damage;
- › Direct damage to tyre components such as rubber and plies;
- › Exposure of internal materials to the outside environment and resulting degradation; and / or
- › Exposure of internal materials to pressurized air (Intra-carcass pressurization).

For these reasons, tyres should be regularly inspected by the consumer. An inspection of the tyres should also be incorporated during routine vehicle maintenance procedures. If tyre damage is suspected or found, it should be carefully assessed by a trained tyre specialist immediately.

ContiSeal tyres^{*)} are designed to seal punctures in the tread from objects no larger than 5 mm diameter. Thoroughly inspect the tyre according to national industry standards. Carefully remove any object from the tyre tread. Even if the tyre seals, if it is punctured, the tyre must be removed from the rim and inspected carefully according to industry standards to determine whether a permanent repair can be made or whether the tyre must be removed from service and scrapped. A permanent repair will require removal of the tyre from the rim and application of a repair method specifically approved for ContiSeal tyres.

The tyre repair specialist, Rema TipTop has developed and approved instructions for the repair of ContiSeal tyres which can be found on the following website:
www.contiseal.com

A consumer should never repair a damaged tyre. Only a trained tyre specialist who can base his assessment on a thorough and comprehensive inspection of the specific tyre can determine whether an individual tyre is suitable for repair or should be removed from service. This assessment should also take into account the complete service life history of the tyre including inflation, load, operating conditions, etc. If the tyre specialist decides to repair the tyre, then he should strictly follow all appropriate national tyre industry repair standards regarding the inspection process and repair procedures. Continental is not responsible for the specialist's decisions or the repaired tyre. Continental advises if a tyre is returned under complaint and reason for the product's disablement is in any way associated with a repair, or the reason for repair the manufacturer's warranty is invalidated.

It is forbidden by law to regroove car tyres.

*) only available for tyre brand Continental

Tyre service life for passenger car and light truck

The tyre industry has long recognized the consumers' role in the regular care and maintenance of their tyres. The point at which a tyre is replaced is a decision for which the owner of the tyre is responsible. The tyre owner should consider factors to include service conditions, maintenance history, storage conditions, visual inspections, and dynamic performance. The consumer should consult a tyre service professional with any questions about tyre service life.

The following information and recommendations are made to aid in assessing the point of maximum service life.

Tyres are designed and built to provide many thousands of miles of excellent service. For maximum benefit, tyres must be maintained properly to avoid tyre damage and abuse that may result in tyre disablement. The service life of a tyre is a cumulative function of the storage, stowing, rotation and service conditions, which a tyre is subjected to throughout its life (load, speed, inflation pressure, road hazard injury, etc.). Since service conditions vary widely, accurately predicting the service life of any specific tyre in chronological time is not possible.

The consumer plays an important role in tyre maintenance.

Tyres should be removed from service for numerous reasons, including tread worn down to minimum depth, damage or abuse (punctures, cuts, impacts, cracks, bulges, underinflation, overloading, etc). For these reasons tyres, including spares, must be inspected routinely, i. e., at least once a month. Regular inspection becomes particularly important the longer a tyre is kept in service. If tyre damage is suspected or found, Continental recommends that the consumer have the tyre inspected by a tyre service professional. Consumers should use this consultation to determine if the tyres can continue in service. It is recommended that spare tyres be inspected at the same time. This routine inspection should occur whether or not the vehicle is equipped with a tyre pressure monitoring system (TPMS).

Consumers are strongly encouraged to be aware of their tyres' visual condition. Also, they should be alert for any change in dynamic performance such as increased air loss, noise or vibration.

Such changes could be an indicator that one or more of the tyres should be immediately removed from service to prevent a tyre disablement. Also, the consumer should be the first to recognize a severe in-service impact to a tyre and to ensure that the tyre is inspected immediately thereafter.

Tyre storage, stowage and rotation are also important to the service life of the tyre. More information regarding proper storage, stowage and rotation is located in other Continental publications, which are available upon request and through its websites.

Tyre service life recommendation

Continental is unaware of any technical data that supports a specific tyre age for removal from service. However, as with other members of the tyre and automotive industries, Continental recommends that all tyres (including spare tyres) that were manufactured more than ten (10) years previous¹⁾ be replaced with new tyres, even when tyres appear to be usable from their external appearance and if the tread depth may have not reached the minimum wear out depth. Vehicle manufacturers may recommend a different chronological age at which a tyre should be replaced based on their understanding of the specific vehicle application; Continental recommends that any such instruction be followed. Consumers should note that most tyres would have to be removed for tread wear-out or other causes before any proscribed removal period. A stated removal period in no way reduces the consumer's responsibility to replace tyres as needed.

Minimum removal tread depth for passenger and light truck tyres

1.6 mm is the most widely accepted minimum tread depth standard at which tyres should be removed from service. This standard has been adopted as a regulation by many of the world's national transportation authorities. As an indication to the consumer, there are tread wear indicator bars in the main grooves of the tyre that become level with the tread surface at approximately 1.6 mm of remaining tread.

In addition to acknowledging the above, **Continental recommends** that all passenger and light truck tyres in highway motor vehicle application be removed from service at the following tread depths:

- › **summer / high performance tyres = 3 mm**
- › **winter tyres = 4 mm**

These recommendations are based upon Continental's testing as well as real world experience which shows that drivers can maintain the performance potential (e.g. wet grip) of their tyres by replacing them before they reach the **regulatory minimum tread depth of 1.6 mm.**

This applies especially to winter tyres for which winter driving properties such as snow traction are significantly reduced at tread depths below 4 mm.

¹⁾ Production code of tyres [see page 7](#).

Guidelines on tyre safety for drivers and vehicle operators (recommended for vehicle handbooks)

Tyres need to be properly handled if they are to keep you and other road users safe. So please note the following:

1. The **tyre pressure** must be as indicated in the operating instructions for your vehicle or as marked on the vehicle itself. The pressure applies to cold tyres; it must not be any lower. Tyres that have become warm, e.g. through driving, will increase in pressure. Never release air from warm tyres, or the pressure could fall below the minimum.

The pressure must be checked **every 14 days** when the tyres are cold. Don't forget to check the spare.

If the pressure is too low, heat may build up in the tyre and lead to internal damage.

At high speeds the tyre may fail as a result of previous internal damage. Tyre damage that cannot be seen is not put right simply by raising the pressure afterwards!

2. If you have to drive over kerbstones do it slowly and, if possible, at right angles. Don't drive up or against any steep or sharp-edged kerbstones or other objects (e.g. stones); this can lead to non-visible tyre damage which can cause problems later - **the tyre may fail when running at high speeds.**

3. Check tyres regularly for **damage**, such as stones, nails etc. that have penetrated the tyre, as well as any cuts, tears or bulges (in the sidewall). Foreign objects can also damage the inside of the tyre. Have your tyre dealer or specialist check your tyres if you are unsure of their condition. **Damaged tyres can burst.**
4. Never fit used tyres whose history you don't know. Remember that **tyres age** even when they are little used or not used at all. If you have a spare tyre and it has not been used for several years have it examined by a tyre specialist. We recommend that tyres (including the spare) should be removed from potential service if they were manufactured more than 10 years previous.
5. Check the **tread depth** of your tyres regularly. The lower the depth, the greater the **risk of aquaplaning**. Ensure that your tyres comply with the legally required tread depth.

- A** Ageing _____ 117, 118
 Aquaplaning _____ 118
- B** Brittleness temperature _____ 101
 of rubber compounds
- C** Choice of tyre _____ 100
 ContiComfortKit _____ 71, 102
 (tyre emergency set)
 ContSeal tyres _____ 11, 12, 13, 15, 16, 24,
 102, 115
 ContSilent Technology _____ 10, 11, 19, 25
 CST (ContiSpareTyre) _____ 66-70
- D** Dimensions _____ 26-65, 67-70, 76-87
 DIN _____ 3
 Directional tyres _____ 103, 111
 DOT _____ 3, 7
- E** ECE _____ 3, 7
 ETRTO _____ 108 ff.
- F** Fitting lubricant _____ 102
 Fitting pressure _____ 103
 Fuel consumption _____ 107
- H** H-rated tyres _____ 8, 102, 107, 108, 109
 Higher grade tyres _____ 100
- I** Imprint _____ 4
 Increasing tyre pressure _____ 110
 Inflation pressure / _____ 3, 9, 103, 118
 tyre pressure
 ISO _____ 3, 9
- L** Load capacity _____ 8, 26-65, 67-70, 76-87,
 88-94, 105-107, 108-109
 Load Index _____ 8, 26-65, 67-70, 76-87,
 104-106, 108
- M** Max. inflation pressure _____ 107
 Max. speed _____ 7, 8, 108-109
 Measuring rim _____ 26-65, 67-70, 76-87, 100
 Min. (tyre) pressure _____ 107
 Min. tread depth _____ 117
 Mixed tyre fitments _____ 100
- N** New tyres _____ 3, 102
- O** Offset depth _____ 96
 Operating conditions _____ 3
 Operating instructions _____ 100-118
 Operating measurements _____ 9, 26-65,
 67-70, 76-87
 Operating pressure _____ 103
 Operating diameter _____ 9, 26-65,
 67-70, 76-87
 Overloading _____ 110
 Overstressing _____ 110
- P** Production code _____ 7
- R** Regrooving _____ 115
 Reinforced _____ 7, 106
 Replacing 82-series by 80 _____ 100
 Rims / Wheels _____ 96-99, 100, 102
 Rim codes _____ 98
 Rim dimensions _____ 97-99
 Rim width _____ 26-65, 67-70, 76-87
 Rolling circumference _____ 9, 26-65,
 67-70, 76-87
 Rolling resistance _____ 107
 Runflat tyres SSR _____ 3, 10, 11, 12, 13, 15, 16,
 17, 18, 19, 22, 23, 100, 102, 103

- S** Safety warning _____ 3, 100, 101, 103, 114
 Service description _____ 8, 26-65, 67-70, 76-87
 Service life _____ 3, 115
 Sidewall marking _____ 6, 7
 Size ranges
 Car tyres _____ 10-17
 Car 4x4 tyres _____ 18-22
 Van tyres _____ 72-75
 Snowflake designation _____ 7, 101
 Spare tyre _____ 8, 66-70, 110
 Speed _____ 8, 108 f., 118
 Speed Symbol (SSY) _____ 8
 SSR runflat tyres _____ 3, 10, 11, 12, 13, 15, 16,
 17, 18, 19, 22, 23, 100, 102, 103
 Static radius _____ 9, 26-65, 67-70, 76-87
 Storage _____ 112
 Style of driving _____ 110
 Summer tyres _____ 10-14, 115
- T** Technical data _____ 26-65, 67-70, 76-87
 Temperature (use of tyres) _____ 101
 Trailers, car-drawn _____ 88-94
 Tread depth _____ 7, 101, 117
 Tubes _____ 95
 Tubeless _____ 7
 TWI (Tread Wear Indicators) _____ 7
 Twin fitment _____ 109
 Tyre ageing _____ 117, 118
 Tyre damages _____ 110, 114, 118
 Tyre emergency set _____ 9, 102
 ContiComfortKit
 Tyre fitting _____ 101-103
 Tyre markings _____ 7
 Tyre pressure / _____ 3, 9, 103-108, 118
 inflation pressure
 Tyre repairs _____ 114
 Tyre service life _____ 115
 Tyre width _____ 9, 26-65, 67-70, 76-87, 100
- U** Under-inflation _____ 107, 110
 Units of measurements _____ 9
- V** V-rated tyres _____ 8, 102, 107, 108, 109
 Valve caps _____ 103
 Valve support _____ 103
 Van tyres _____ 72-87
 Vibrations _____ 110
- W** W-rated tyres _____ 8, 102, 107, 108, 109
 Wheel camber _____ 109
 Wheel caps / trim rings _____ 103
 Wheel disc _____ 96
 Wheels / rims _____ 96-99, 100, 102
 Winter tyres _____ 7, 15-17, 21-22, 75, 101, 117
- X** XL (Extra Load) _____ 7, 106
- Y** Y-rated tyres _____ 8, 102, 107, 108, 109
- Z** ZR-rated tyres _____ 8, 102, 107, 108, 109

D	Continental Reifen Deutschland GmbH Head Office:	Büttnerstraße 25 30165 Hannover P.O.B. 169 30001 Hannover	Telephone: ++49-511-9 38-01 Telefax: ++49-511-938-81770
A	Semperit Reifen Ges. m. b. H. Marketing + Vertrieb Österreich	Triester Strasse 14 2351 Wiener Neudorf	Telephone: ++43-22 36-40 40-0 Telefax: ++43-22 36-40 40-40 01
B	Continental Benelux S. A	Excelsiorlaan 61 1930 Zaventem	Telephone: ++32-2710 22 11 Telefax: ++32-2710 22 90
CH	Continental Suisse SA	Lerzenstrasse 19A 8953 Dietikon	Telephone: ++41-44 / 7 45 56 00
CZ	Continental Barum sr. o.	76531 Otrokovice Objizdne 1628	Telephone: ++420 577 511 111
DK	Continental Dæk Danmark A/S	Banemarksvej 50 E, 1 2605 Brøndby	Telephone: ++45-43 23 04 00 Telefax: ++45-43 23 04 01
E	Continental Tires España, S. A.	Avda Castilla 1 Edificio 1 Planta 2 28830 San Fernando de Henares (Madrid)	Telephone: ++34-91-660 36 57 Telefax: ++34-91-675 68 22
F	Continental France SNC Division Commerce	Lieudit le Bac à l'aumône 60605 Compiègne	Telephone: ++33-3-44 40 71 11 Telefax: ++33-3-44 40 74 89
GB	Continental Tyre Group Ltd.	191-195 High Street Yiewsley Middlesex, UB7 7QP	Telephone: ++44-1895 425900 Telefax: ++44-1895 425908
H	Continental Hungaria Kft.	Táviróó Kőz 2-4 2040 Budaörs	Telephone: ++36-23-33 59 01 Telefax: ++36-23-33 54 63
I	Continental Italia S. p. A.	Via Pietro Rondoni 1 20146 Milano	Telephone: ++39-02-42 4101 Telefax: ++39-02-42 4102 00
N	Continental Dekk Norge A/S	Breivollveien 31 667 Oslo	Telephone: ++47-23 06 80 00 Telefax: ++47-23068001
NL	Continental Banden Groep B. V.	Nijverheidsweg 50 3771 ME Barneveld	Telephone: ++31-3-42 49 72 00 Telefax: ++31-3-42 49 72 91
P	Continental Pneus S. A.	4764-603 Lousado Apartado 5029 Rua Adelino Leitao 330	Telephone: ++351-252-49 92 34 Telefax: ++351-252-49 36 23
PL	Continental Opony Polska Sp. zo. o.	Al. Krakowska 2 a 02284 Warszawa	Telephone: ++48-22-5 7713 00 Telefax: ++48-22-5 7713 01
S	Continental Däck Sverige AB	Första Langgatan 30 40032 Göteborg	Telephone: ++46-31-7 75 80 00 Telefax: ++46-31-24 68 50
SF	Continental Rengas Oy	PL 2 Hevosenkenta 3 02661 Espoo	Telephone: ++358-9-329 900 Telefax: ++358-9-32990 400

Technical Data

Passenger car tyres / 4x4 tyres

- 1) Instead of J-rims the same size JK- and JJ-rims may be used.
- 2) Winter tyres can be max. 1% greater in outer diameter than standard on-road tread patterns.
- 3) According to DIN 70020 at 37 mph (60 km/h).
- 4) Instead of B-rims, J- and JK-rims may also be used.
- 5) The respective B-rims are permitted.
- *) ZR tyres have no operational code. The LI given for these tyres is only an approx. figure. Ask Continental Customer Services for the actual speed and load capacity.

Van tyres

- 6) Load Index single / twin fitment and Speed Index.
- 7) Dual spacing for twin tyre fitments: See Technical Data Book for Truck Tyres.
- 8) Standard = on road tread pattern, Special = M + S or off road tread pattern.
- 9) S = Single, T = Twin fitment, FA = front axle, RA = rear axle.

For tyre pressures see “Operating instructions”, page 103 ff.