

Conti HDL 3 EP

Fuel-Efficient, Mileage-Balanced Drive

Up to 10% improvement
in rolling resistance compared
to the HDL2+.*

**Innovative
groove geometry**
to minimize stone retention.



.....
**New advanced tread
compounding**
for maximum fuel efficiency
and balanced wear.

* tested internally to ISO 28580 for Smartway Verification

Conti HDL 3 EP

Fuel-Efficient, Mileage-Balanced Drive


Advanced tread compound with high-structure carbon black and silica technology provides **balanced rolling resistance and wear performance**.

Utilizing a polymer matrix bound silica compound, this design achieves up to a **10% improvement in rolling resistance** compared to the HDL2+.

Even wear due to optimized tire footprint.

Innovative groove geometry, achieved with a specialized compound, minimizes stone retention and offers up to a **15% improvement in chip and cut resistance** compared to the HDL2+.

Built on the **Continental 3G Casing** for maximum retreadability.

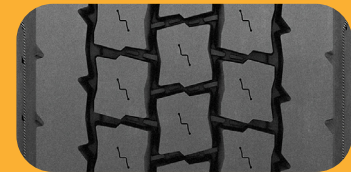

^ based off of internal laboratory evaluations.

Key Features




3G Casing



SmartWay® Verified

Recommended Application

Long Haul



Product Data - Conti HDL 3 EP

Tire Size	Load Range	Article Number	Tread Depth (32nds)	Max Speed (MPH)	Static Loaded Radius		Overall Inflated Diameter		Overall Inflated Width		Loaded Section Width		Approved Rim(s)	Minimum Dual Spacing		Revs Per Unit		Tire Weight		Max. Load @ Inflation	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	Single	Dual
																				LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
295/75R22.5	G	05212370000 05655670000	26	75	18.9	481	40.5	1029	11.5	292	12.9	328	8.25, 9.00	12.5	318	511	318	123	56	6175, 110 (2800, 760)	5675, 110 (2575, 760)
295/75R22.5	H	05212420000 05655730000	26	75	18.9	481	40.5	1029	11.5	292	12.9	328	8.25, 9.00	12.5	318	511	318	126	57	6610, 120 (3000, 830)	6005, 120 (2725, 825)
11R22.5	G	05212380000 05655680000	26	75	19.6	499	42	1066	11.7	296	13.1	331	8.25, 7.50	12.5	318	493	306	129	58	6175, 105 (2800, 720)	5840, 105 (2650, 720)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

■ STANDARD ARTICLE

■ INTELLIGENT ARTICLE

Note: Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. These specifications subject to change without notice. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Compares to

Brand	Tire	Tread Depth (32nds)	Grooves
Continental	Conti HDL 3 EP	26	4
Michelin	X Energy D	23	4
Bridgestone	M713 Ecopia	24	4
Goodyear	Fuel Max LHD 2	24	4