

Gen·era·(tion) 5

New era of confidence



Conti HDR 5
ContiTread HDR 5
19.5" Regional Drive

Applications: Long haul/regional over the highway drive use

Legend:

| | | | |
|-----------|-------------------|------------------|-------------------|
| | | | |
| 3G Casing | SmartWay Verified | Intelligent Tire | Retread Available |

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Conti HDR 5

19.5" Regional Drive

GOODS PEOPLE CONSTRUCTION



PRODUCT DATA




| TIRE SIZE | LOAD RANGE | ARTICLE NUMBER | TREAD DEPTH (32nds) | MAX SPEED (MPH) | STATIC LOADED RADIUS | | OVERALL INFLATED DIAMETER | | OVERALL INFLATED WIDTH | | LOADED SECTION WIDTH | | APPROVED RIM(S) | MINIMUM DUAL SPACING | | REVS PER UNIT | | TIRE WEIGHT | | MAX. LOAD @ INFLATION | |
|-------------|------------|------------------------------|---------------------|-----------------|----------------------|-----|---------------------------|-----|------------------------|-----|----------------------|-----|-----------------|----------------------|-----|---------------|-----|-------------|----|--------------------------|--------------------------|
| | | | | | IN | MM | IN | MM | IN | MM | IN | MM | | IN | MM | IN | MM | MI | KM | LB | KG |
| 225/70R19.5 | G | 05223820000 # 05652850000 | 16 | 87 | 15.1 | 383 | 32.0 | 814 | 8.6 | 219 | 9.3 | 236 | 6.00, 6.75 | 10.0 | 254 | 646 | 401 | 61 | 28 | 3970, 110 (1800, 760) | 3750, 110 (1700, 760) |

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. ## = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.

Features & Benefits

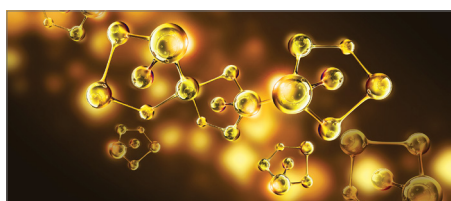

New tread compound for **improved rolling resistance and tread durability.**



3D matrix siping for **improved traction and wear** over life of tire.



New **open shoulder** tread design.



16/32" tread pattern designed to deliver **improved mileage and handling** performance.

ContiTread™



| WIDTH (MM) | DEPTH (32nds) |
|----------------------|---------------|
| HDR 5 - 19.5" | |
| 200 | 22/32 |
| 210 | 22/32 |
| 220 | 22/32 |

This product is 3PMSF Certified.

M+S This product is Mud + Snow Certified.

Applications: Long haul/regional over the highway drive use.