

Conti Hybrid HT3

Durable Fuel-Efficient Trailer for Spread-Axles

Applications: Spread-axle trailer. Long haul and regional use.

Legend:



PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.


Conti Hybrid HT3

Durable Fuel-Efficient Trailer for Spread-Axes

✓ GOODS ● PEOPLE ✓ CONSTRUCTION



PRODUCT DATA




| TIRE SIZE | LOAD RANGE | ARTICLE NUMBER | TREAD DEPTH (32nds) | MAX SPEED (MPH) | STATIC LOADED RADIUS | | OVERALL INFLATED DIAMETER | | OVERALL INFLATED WIDTH | | LOADED SECTION WIDTH | | APPROVED RIM(S) | MINIMUM DUAL SPACING | | REVS PER UNIT | | TIRE WEIGHT | | MAX. LOAD @ INFLATION | |
|-------------|------------|----------------------------|---------------------|-----------------|----------------------|-----|---------------------------|------|------------------------|-----|----------------------|-----|-----------------|----------------------|-----|---------------|-----|-------------|----|-----------------------|-----------------------|
| | | | | | IN | MM | IN | MM | IN | MM | IN | MM | | IN | MM | MI | KM | LB | KG | SINGLE | DUAL |
| | | | | | LBS, PSI (KG, KPa) | | LBS, PSI (KG, KPa) | | | | | | | | | | | | | | |
| 11R22.5 | G | 05321060000 05651000000 | 16 | 75 | 19.2 | 488 | 41.2 | 1046 | 11.1 | 282 | 12.0 | 305 | 8.25 | 12.5 | 318 | 502 | 312 | 111 | 50 | 6175, 105 (2800, 720) | 5840, 105 (2650, 720) |
| 11R22.5 | H | 05321250000 05651040000 | 16 | 75 | 19.2 | 488 | 41.2 | 1046 | 11.1 | 282 | 12.0 | 305 | 8.25 | 12.5 | 318 | 502 | 312 | 113 | 51 | 6610, 120 (3000, 830) | 6005, 120 (2725, 830) |
| 295/75R22.5 | G | 05321040000 05651650000 | 16 | 75 | 18.5 | 470 | 39.6 | 1006 | 11.1 | 282 | 12.6 | 320 | 8.25 | 12.5 | 318 | 523 | 325 | 107 | 49 | 6175, 110 (2800, 760) | 5675, 110 (2575, 760) |
| 295/75R22.5 | H | 05321270000 05651200000 | 16 | 75 | 18.5 | 470 | 39.6 | 1006 | 11.1 | 282 | 12.6 | 320 | 8.25 | 12.5 | 318 | 523 | 325 | 109 | 50 | 7160, 120 (3250, 830) | 6610, 120 (3000, 830) |
| 11R24.5 | G | 05321070000 05651050000 | 16 | 75 | 20.2 | 513 | 43.1 | 1095 | 11.1 | 282 | 12.0 | 305 | 8.25 | 12.5 | 318 | 480 | 298 | 119 | 54 | 6610, 105 (3000, 720) | 6005, 105 (2725, 720) |
| 11R24.5 | H | 05321260000 05651190000 | 16 | 75 | 20.2 | 513 | 43.1 | 1095 | 11.1 | 282 | 12.0 | 305 | 8.25 | 12.5 | 318 | 480 | 298 | 122 | 55 | 7160, 120 (3250, 830) | 6610, 120 (3000, 830) |
| 285/75R24.5 | G | 05321050000 05651220000 | 16 | 75 | 19.2 | 488 | 40.9 | 1039 | 10.7 | 272 | 12.1 | 307 | 8.25 | 12.5 | 318 | 506 | 314 | 112 | 51 | 6175, 110 (2800, 760) | 5675, 110 (2575, 760) |
| 285/75R24.5 | H | 05321280000 05651210000 | 16 | 75 | 19.2 | 488 | 40.9 | 1039 | 10.7 | 272 | 12.1 | 307 | 8.25 | 12.5 | 318 | 506 | 314 | 114 | 52 | 6780, 120 (3075, 830) | 6175, 120 (2800, 830) |


TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. # = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. * - ECE Certified. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.


Features & Benefits

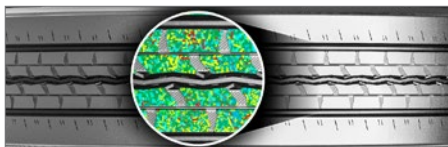

Advanced tread compound to achieve performance in high scrub application and still maintain low rolling resistance.

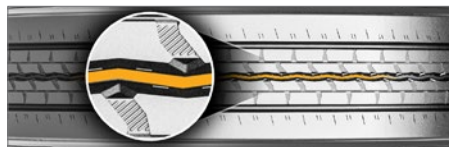

Patented groove technology for minimal stone retention, extending casing life.

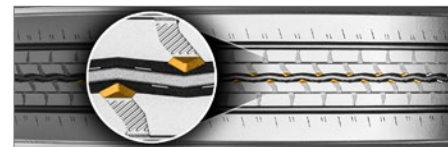

Pyramidal stone ejection system integrated into the center groove for added casing protection.

Superior Performance in Spread-axle Trailer Applications vs. HSR2

*Based on projected calculations.

Applications: Spread-axle trailer. Long haul and regional use.