

# Conti Scandinavia HD3

## Regional Drive for Extreme Weather Conditions

**Applications: Drive axle tire for extreme weather conditions.**



Legend:

3G Casing	SmartWay Verified	Intelligent Tire	Retread Available

**PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.**


# Conti Scandinavia HD3

## Regional Drive for Extreme Weather Conditions

GOODS PEOPLE CONSTRUCTION



### PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)		
11R225	H	05230560000	27	75	19.8	502	42.0	1067	11.6	295	12.7	323	8.25, 750	12.5	318	493	306	130	59	6610, 120 (3000, 830)	6005, 120 (2725, 830)
11R245	H	05230570000	27	75	20.6	524	44.0	1118	11.6	295	12.7	323	8.25, 750	12.5	318	470	292	140	64	7160, 120 (3250, 825)	6610, 120 (3000, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. # = Intelligent Tire Article #. Minimum Dual Spacing calculated without chains. # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.


### Features & Benefits

Multiple sipe technologies including 3D siping to provide traction during winter weather conditions throughout the life of the tire.



Directional M + S tread pattern delivers even wear and traction in both snow or mud.

All-Season compounding to deliver performance during any season.

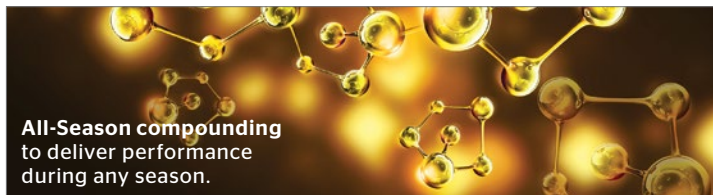

Conti 3G casing with an extended 4th belt for enhanced retreadability.



This product is 3PMSF Certified.

**Applications:** Drive axle tire for extreme weather conditions.